




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : B41J		A2	(11) International Publication Number: WO 00/59729
			(43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/US00/09426			
(22) International Filing Date: 7 April 2000 (07.04.00)			
(30) Priority Data:			
09/288,261	8 April 1999 (08.04.99)	US	
09/288,277	8 April 1999 (08.04.99)	US	
09/288,361	8 April 1999 (08.04.99)	US	
09/288,424	8 April 1999 (08.04.99)	US	
09/288,428	8 April 1999 (08.04.99)	US	
09/288,278	8 April 1999 (08.04.99)	US	
(71) Applicant (for all designated States except US): GERBER SCIENTIFIC PRODUCTS, INC. [US/US]; 151 Batson Drive, Manchester, CT 06040 (US).		(74) Agents: RAINVILLE, Peter, J. et al.; McCormick, Paulding & Huber, Cityplace II, 185 Asylum St., Hartford, CT 06103 (US).	
(72) Inventors; and			
(75) Inventors/Applicants (for US only): HEVENOR, Charles, M. [-/US]; 50 Whittles Way, Glastonbury, CT 06033 (US). TORTORA, William, J. [-/US]; 77 Fisher Hill Road, Willington, CT 06279 (US). LOOS, William, A. [-/US]; 44 Melrose Road, Broad Brook, CT 06016 (US). WOOD, Kenneth, O. [-/US]; 6914 Saint Vrain Road, Longmont, CO 80503 (US). OSCARSON, Edward, M. [-/US]; 70 Behrens Road, New Hartford, CT 06057 (US). MINDEK, David, M. [-/US]; 6 Lakeside Drive, Ashford, CT 06278 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: WIDE FORMAT PRINTING APPARATUS AND METHOD

(57) Abstract

Disclosed are the following: a wide format thermal printer for printing a multicolor graphic product on a printing sheet; a vacuum workbed for supporting a sheet material for performing work operations, such as cutting, printing or plotting, thereon; a replaceable donor sheet assembly, which includes a memory, for use with a thermal printer; methods and apparatus for improved thermal printing, including methods and apparatus for conserving donor sheet and reducing the amount of time required to print a multicolor graphic product; a thermal printhead including a memory; and methods and apparatus for the alignment of a sheet material for printing or performing other work operations on the sheet material. The wide format thermal printer can include provision for the automatic loading of cassettes of donor sheet from a cassette storage rack. The vacuum workbed can include provision for determining the size of the sheet material supported by the workbed, and for controlling the suction applied to the apertures in a worksurface of the workbed. Also disclosed are methods and apparatus for controlling the tension of the donor sheet during printing with a wide format thermal printer.

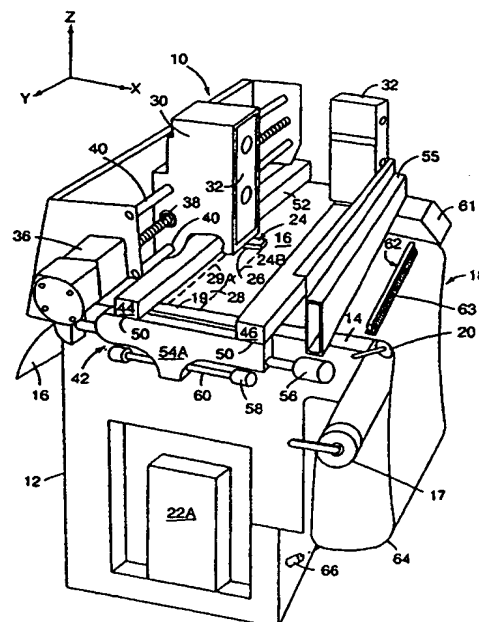

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WIDE FORMAT PRINTING APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

5 The present invention relates to methods and apparatus for printing a graphic product on sheet material in accordance with a printing program and stored data representative of the graphic product, and more particularly to methods and apparatus for printing a wide format multicolor graphic product on a printing sheet, such as a vinyl sheet for use as signage.

10 Known in the art are thermal printing apparatus for generating signs, designs, characters and other graphic products on a printing sheet in accordance with a printing program and data representative of the graphic product. Typically, a thermal printer interposes a donor sheet that includes donor material and a backing between a thermal
15 printhead and the printing sheet. The thermal printhead includes an array of thermal printing elements. The thermal printhead prints by pressing the donor sheet against the printing sheet and selectively energizing the thermal printing elements of the array, thereby selectively transferring pixels of donor medium from the donor sheet to the printing sheet. Movement of the printing sheet relative to the thermal printhead (or vice
20 versa) while pressing the donor sheet against the printing sheet with the thermal printhead draws fresh donor sheet past the thermal printhead. The printing sheet typically includes a vinyl layer secured to a backing layer by a pressure sensitive adhesive so that after printing the vinyl bearing the graphic product can be cut and stripped from the backing material and affixed to an appropriate sign board or other
25 material for display.

 The proper printing of many graphic products, such as commercial artwork or signage, can require high quality print work. Often, it is desired that the final multicolor graphic product be physically large, such as several feet wide by tens of feet long.
30 Typically, existing thermal printers are limited in the width of printing sheet that they can print upon. For example, one popular thermal printer prints on sheets that are one foot

wide. Accordingly, the final graphic product is often assembled from separately printed strips of printing sheet that must be secured to the signboard in proper registration with one another. Often, the registration is less than perfect and the quality of the final graphic product suffers, especially when backlit.

5

Wide format thermal printers are known in the art. For example, one wide format thermal printer currently available can accommodate a printing sheet up to three feet wide and uses four full width (i.e., three feet wide) printheads, each interposing a different color donor sheet between the printhead and the printing sheet. Accordingly, far fewer seams, if any at all, require alignment when creating the sign or other product. Also, the use of four printheads allows faster printing of the multicolor graphic product.

Unfortunately, this type of machine can be expensive to manufacture and to operate. For example, each printhead, at a typical resolution of 300 dpi, includes literally thousands of thermal printing elements, all of which are typically required to have resistances that are within a narrow tolerance range. Such a thermal printhead is difficult and expensive to manufacture, and moreover, burnout of simply a few thermal printing elements can require replacement of the entire printhead. Furthermore, donor sheet is also expensive, and the full-width printing heads can be wasteful of donor sheet when printing certain types of, or certain sections of, graphic products. For example, consider that a single color stripe one inch wide and perhaps a foot long is to be printed in center of the printing sheet. Though the printed object occupies 1/12 of a square foot, an area of donor sheet that is three feet wide by one foot long, or three square feet, is transferred past the print head when printing the above object, and hence consumed. The printing of a wide format graphic product that includes a narrow border about the periphery of the printing sheet is another example that typically can be wasteful of donor sheet when printing with the above wide format thermal printer.

Other wide format printers are known in the art, such as wide format ink-jet printers, which can also print in a single pass. However, inkjet printed multicolor graphic products are typically not stable when exposed to the elements (e.g., wind, sun, rain) or

require special post-printing treatment to enhance their stability, adding to the cost and complexity of printing with such apparatus.

Accordingly, it is an object of the present invention to address one or more of the foregoing and other deficiencies and disadvantages of the prior art.

5

Other objects will in part appear hereinafter and in part be apparent to one of ordinary skill in light of the following disclosure, including the claims.

10

SUMMARY OF THE INVENTION

Donor Sheet Assembly

In one aspect, the invention provides an assembly providing a supply of donor
15 sheet for use in a printing operation and for replaceable use with a donor sheet
cassette. The assembly includes a core having a tubular body, which body extends
along a longitudinal axis between a base end and a drive end, and which body also has
a central opening extending along the longitudinal axis between the base end and the
drive end and a selected length of donor sheet wound about the core body. The core
20 body also includes a plurality of drive elements, which drive elements extend along and
radially of the longitudinal axis, and are located within the central opening substantially
at the drive end of the core body. The assembly further includes a memory element
mounted within the central opening of the core body and substantially at the drive end of
the core body and inboard of the drive elements, the memory element having a data
25 transfer face substantially perpendicular to the longitudinal axis and facing the base end
of the core body and a back face facing the drive end of the core body.

The assembly can also include a take-up core having a tubular body, which body
extends along a longitudinal axis between a base end and a drive end, and which body
30 also has a central opening extending along the longitudinal axis between the base end
and the drive end of the core body. The take-up core can also include a plurality of
drive elements, which drive elements extend along and radially of the longitudinal axis,
and are located within the central opening substantially at the drive end of the core body
and are substantially identical to the drive elements of the supply core body. The free
35 end of the length of donor sheet is coupled to the take-up core body.

In an additional aspect of the invention, there is provided an assembly for providing a supply of donor sheet for use with a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes. The assembly is for replaceable insertion in a refillable donor sheet cassette, where the cassette

5 replaceably mounts on a cassette receiving station mounted with a thermal printhead of the thermal printer, and the cassette receiving station is adapted for receiving the cassette such that a section of donor sheet is positioned under the thermal printhead and interposed between the printhead and the printing sheet when printing. The assembly includes a core having a tubular body, which body extends along a

10 longitudinal axis between a base end and a drive end, and which body also has a central opening extending along the longitudinal axis between the base end and the drive end and a selected length of donor sheet wound about the core body. The core body includes a plurality of drive elements, which drive elements extend along and radially of the longitudinal axis, and are located within the central opening substantially

15 at the drive end of the core body. A memory element mounts within the central opening of the core body and substantially at the drive end of the core body and inboard of the drive elements. The memory element includes a data transfer face substantially perpendicular to the longitudinal axis and facing the base end of the core body and a back face facing the drive end of the core body.

20 In yet another aspect, the invention provides a method of providing a replaceable donor sheet assembly for insertion in a refillable cassette and for use with a thermal printer for providing a donor sheet for thermal printing. The method includes the steps of providing a length of donor sheet; providing a core having a tubular body extending

25 along a longitudinal axis between a base end and a drive end and having a central opening extending therethrough between the base and drive ends, where the core includes a plurality of drive elements, which drive elements extend along and radially of the longitudinal axis and are located within the central opening substantially at the drive end of the core body, as well as a memory element mounted within the central opening

30 of the core body and substantially at the drive end of the core body and inboard of the drive elements, where the memory includes a data transfer face substantially perpendicular to the longitudinal axis and facing the base end of the core body and a back face facing the drive end of the core body; winding the selected length of the donor sheet about the core body; determining selected data characteristic of the donor sheet;

35 and writing the selected data to the memory element.

In yet another aspect of the invention, there is provided a method of manufacturing a replaceable assembly for providing a supply of donor sheet and for

insertion in a refillable cassette. The method includes the steps of: providing a length of donor sheet having a first width W ; cutting the length of donor sheet along its length into N separate slice lengths of donor sheet each having a width approximately equal to W divided by N ; providing N supply core bodies; winding the N slice lengths of donor sheet onto the N core bodies to provide N wound supply core bodies of donor sheet; providing
5 N memory elements each having data transfer and back faces, each of the memory elements mounted within a different supply core body substantially at a first end thereof and having the data transfer face facing inwardly toward the second end of the core body; testing the donor sheet to determine data characteristic of the donor sheet; storing
10 on the memory elements the data characteristic of the sheet material; providing N take-up core bodies; and affixing free ends of each of the slice lengths wound on the supply core bodies to a different take-up core body to form N donor sheet assemblies.

15 Wide Format Printer

In a further aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic
20 product. The wide format thermal printer includes a workbed including a platen and having a worksurface for supporting the printing sheet. The worksurface contains a print axis and printing sheet translation axis perpendicular to the print axis.

The wide format thermal printer also includes a pair of translatable clamps each
25 movable between clamped and unclamped conditions relative to the printing sheet supported on the worksurface, and each extending across the workbed in the direction of the print axis from a first end to second end. The clamps are for translating the printing sheet in the direction of the printing sheet translation axis, and the first ends are mechanically coupled to one another and the second ends are mechanically coupled to
30 one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis. At least one actuator is coupled to the clamp pair for translating the clamp pair in the direction of the printing sheet translation axis between first and second positions.

Further included is a thermal printhead having an array of thermal printing
35 elements extending parallel to the printing sheet translation axis. The thermal printhead is translatable parallel to the print axis for printing on the printing sheet in print swaths extending parallel to the print axis in an area between the clamps by pressing the donor

sheet against the printing sheet and selectively energizing the thermal printing elements.

- 5 The wide format thermal printer also includes donor sheet means including a supply shaft for rotationally engaging a supply roll of the donor sheet, a take-up shaft for rotationally engaging a take-up roll for winding thereon donor sheet that has been drawn from the supply roll and interposed between the thermal printhead and the printing sheet, and a take-up motor rotationally coupled to the take-up shaft, the shafts and rolls mounted with the thermal printhead for translation parallel to the print axis therewith.
- 10 Means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet are also provided.

- 15 According to another aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic product. The wide format thermal printer includes a workbed including a platen and having a worksurface for supporting the printing sheet, the worksurface including a print axis and a printing sheet translation axis. Also included are: means for translating the
- 20 printing sheet along a printing sheet translation axis and means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet.

- Also provided is a printhead carriage including the following: a base structure
- 25 mounted with the printer for translation in the direction of the print axis; a cantilever arm pivotably mounted at a first end to the base structure for pivoting about an axis generally transverse to the print axis, where the cantilever arm mounts a thermal printhead having an array of thermal printing elements extending parallel to the printing sheet translation axis; a pivot actuator coupled to the base and to the other end of the cantilever arm for
- 30 selectively pivoting the cantilever arm about the pivot axis for lowering and raising the thermal printhead; donor sheet handling means mounted with the base structure for interposing the donor sheet between the thermal printhead and the printing sheet supported by the worksurface, where the donor sheet handling means includes a supply shaft for engaging a supply roll of the donor sheet, a take-up shaft for engaging a take-
- 35 up roll of donor sheet that has been interposed between the thermal printhead and the printing sheet, and a take-up motor rotationally coupled to the take-up shaft.

In yet another aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic product. The wide format thermal printer includes a workbed including a platen for providing a worksurface for supporting the printing sheet, and the worksurface contains a print axis and printing sheet translation axis perpendicular to the print axis. The wide format thermal printer also includes printing sheet translation means for translating the printing sheet along a printing sheet translation axis.

There is also provided a thermal printhead having an array of thermal printing elements extending parallel to the printing sheet translation axis, and donor sheet apparatus including a take-up shaft coupled to a take-up motor and a supply shaft, where the take-up and supply shafts are for coupling to take-up rolls and supply rolls, respectively, of donor sheet. The take-up motor is for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between the thermal printhead and the printing sheet. The thermal printhead is translatable parallel to the print axis for printing on the printing sheet in print swaths extending parallel to the print axis in an area between the clamps by pressing the donor sheet against the printing sheet and selectively energizing the thermal printing elements.

Further included are means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet, and a controller in communication with the printing sheet translation means, the thermal printhead, the donor sheet means and the means for securing the printing sheet for printing the multicolor graphic product on the printing sheet responsive to the stored data representative of the multicolor graphic product.

The controller includes programming stored in a memory associated therewith for controlling printing sheet translation means to translate the printing sheet in one direction parallel to the printing sheet translation axis between successive print swaths when printing one of the color planes and to translate the printing sheet in the opposite direction parallel to the printing sheet translation axis when printing a different color plane.

In an additional aspect of the invention, there is provided a wide format thermal printer for printing a graphic product onto a printing sheet responsive to machine readable data representative of the graphic product. The wide format thermal printer includes a workbed having a worksurface for supporting the printing sheet and a thermal

printhead having an array of thermal printing elements for pressing a donor sheet against the printing sheet for printing on the printing. Also included are printing sheet translation means for translating the printing sheet along a printing sheet translation axis and donor sheet means including first and second shafts for mounting supply and take-up rolls, respectively, of donor sheet. The donor sheet is drawn from the supply roll, interposed between the thermal printhead and the printing sheet for printing therewith, and wound on the take-up roll, and the donor sheet means further includes a take-up motor for coupling to the take-up roll for applying a torque thereto and a brake for applying a braking force to the donor sheet.

Also included is a data transfer element for reading data from a memory element mounted with one of the supply and take-up rolls of donor sheet, and a controller in communication with the printing sheet translation means, the thermal printhead, the data transfer element and the take-up motor for printing the multicolor graphic product on the printing sheet responsive to the stored data representative of the multicolor graphic product.

The controller includes programming stored in a memory associated therewith for reading data characteristic of the donor sheet from the memory element, determining the radius of at least the take-up roll from the read data characteristic of the donor sheet, determining a desired tension to be applied to the donor sheet during printing and energizing the take-up motor responsive to the radius of the take-up roll and the desired tension for applying the desired tension to the donor sheet.

In a further aspect, the invention provides a method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the color planes. The method includes the following steps:

A) supporting the printing sheet with a worksurface

B) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet, the thermal printhead having an array of thermal printing elements extending parallel to a printing sheet translation axis;

C) printing the color plane on the printing sheet in print swaths extending parallel to a print axis substantially orthogonal to the printing sheet translation axis by repeating the following steps 1) and 2) alternately:

- 5 1) translating the printhead parallel to the print axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead;
- 10 2) translating the printing sheet parallel to the translation axis between print swaths;

and

- 15 D) performing steps A, B, and C for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated in the opposite direction parallel to the translation axis between consecutive swaths to that in which it is translated between consecutive swaths when printing a different color plane.

20

In yet a further additional aspect, the invention provides a method of tensioning donor sheet in a thermal printer wherein the donor sheet is drawn from a supply roll, interposed between a thermal printhead and a printing sheet and wound on a take-up roll. The method includes the following steps:

25

providing a take-up motor coupled to the take-up roll for providing a rotational torque to the take-up roll responsive to the energization of the take-up motor;

30

providing a brake coupled to the donor sheet for applying a selected braking force to the donor sheet;

reading data characteristic of the donor sheet from a memory element mounted with one of the supply roll and the take-up roll;

35

determining a desired tension to be applied to the donor sheet; determining the radius of at least the take-up roll as a function of at least the data characteristic of the donor sheet read from the memory element; and

applying the desired tension to the donor sheet, including the step of selectively energizing the take-up motor as a function of the radius of the take-up roll and the desired tension to be applied to the donor sheet.

5

Donor Sheet Conservation

In yet a further aspect, the invention provides a method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine
10 readable data representative of the graphic product. The method includes the following steps:

selecting a donor sheet corresponding to the color plane to be printed and
interposing the donor sheet between a thermal printhead and the printing sheet, the
15 thermal printhead having an array of printing elements extending for a printing width along a printing sheet translation axis;

printing the color plane onto the printing sheet in successive print swaths by
translating the thermal printhead along a print axis orthogonal to the printing sheet
20 translation axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead;

translating the printing sheet in the direction of the printing sheet translation axis
between print swaths; and
25

wherein, for at least one print swath, when consecutive pixels to be printed are
separated by more than a minimum distance in the direction of the print axis, printing
that swath includes refraining from pressing the donor sheet against the printing sheet
with the printhead when translating the printhead at least part of the distance between
30 the consecutive pixels, whereby the refraining from pressing substantially prevents donor sheet from being drawn past the printhead, thereby conserving donor sheet.

In another aspect, the invention provides a method of printing with a thermal
printer that prints a multicolor graphic product on a printing sheet in each of different
35 color planes responsive to selected machine readable data representative of the graphic product. The method includes the following steps:

A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet, the thermal printhead having an array of printing elements extending along a printing sheet translation axis;

5

B) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to printing sheet translation axis by repeating the following steps 1) and 2) alternately

10

1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead;

15

2) translating the printing sheet in the direction of the printing sheet translation axis between print swaths;

and

20

C) performing steps A) and B) for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated in the opposite direction along the printing sheet translation axis between successive print swaths to that in which it is translated between successive swaths when printing a different color plane; and

25

wherein, for at least one print swath, when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, printing that swath includes refraining from pressing the donor sheet against the printing sheet with the printhead when translating the printhead at least part of the distance between the consecutive pixels, whereby the refraining from pressing substantially prevents donor sheet from being drawn past the printhead, thereby conserving donor sheet.

30

In an additional aspect, the invention provides a method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in separate color planes responsive to machine readable data representative multicolor graphic product. The method includes the following steps:

35

A) selecting a supply length of donor sheet corresponding to a color plane to be printed and interposing a section of the supply length between a thermal printhead and the printing sheet, the thermal printhead having an array of printing elements extending from a trailing end to a leading end along a printing sheet translation axis;

5

B) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to the printing sheet translation axis by repeating the following steps 1) and 2) alternately

10 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead and print on the printing sheet;

15 2) translating the printing sheet in the direction of the printing sheet translation axis in an integer number of separate steps, each step translating the printing sheet by a translation increment substantially equal to the printing width; and

20 C) wherein in performing step B), at least one of the steps 1) includes translating the printing sheet in at least two steps, wherein one of the steps translates the printing sheet by a distance less than the increment and the other and any additional steps each translate the printing sheet by the increment.

25 In yet a further aspect, the invention provides a method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in separate color planes responsive to machine readable data representative multicolor graphic product. The method includes the following steps:

30 A) organizing a selected color plane into selected areas of the color plane, wherein within each area the objects to be printed are within a selected distance of each other along a printing sheet translation axis and wherein the objects within any one area are separated in the direction of the printing sheet translation axis from the objects in the other areas by a distance greater than the selected distance;

35

B) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;

C) printing each of the areas of the color plane on the printing sheet in print swaths having a printing width and extending along a print axis orthogonal to the printing sheet translation axis by repeating the steps 1) and 2) alternately

5

- 1) a) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor sheet past the printhead; and

10

- b) translating the printing sheet by a selected increment in the direction of the printing sheet translation axis between successive print swaths having a swath width in the direction of the printing sheet translation axis, and alternately repeating steps a) and b) as necessary until the area is printed; and

15

- 2) before printing the next area translating the printing sheet in the direction of the printing sheet translation axis by the distance substantially equal to the distance separating the area printed in 1) above and the next area to be printed.

20

In a further aspect, the invention provides a method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the graphic product.

25 The method includes the steps of:

- A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;

30

- B) printing the color plane on the printing sheet in print swaths extending along a print axis, and having a selected width along a printing sheet translation axis substantially orthogonal to the print axis, by repeating the steps 1) and 2) alternately

35

- 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor material past the printhead;

- 2) translating the printing sheet in the direction of the printing sheet translation axis by a distance substantially equal to at least the selected width; and

5

- C) performing steps A) and B) for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated between successive swaths in the opposite direction along the printing sheet translation axis to that in which it is translated when printing successive swath of a different color plane; and

10

- wherein performing one of the steps 1) for at least one of the color planes includes translating the printing sheet in at least two steps wherein one of the steps translates the printing sheet a distance less than the selected width and any additional steps are each substantially equal to the selected width.

15

The invention can also include a method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, where the method includes the following steps:

20

- A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array of printing elements extending for a predetermined printing width along a printing sheet translation axis;

25

- B) selecting first and second portions of the color plane to be printed on the printing sheet, the step of selecting including

30

determining the end in the direction of the printing sheet translation axis of the color plane to which the printhead is currently the nearest; and

selecting the first portion of the color plane to be between the printhead and the nearer end of the color plane and the second portion to be the remainder of the color plane; and

35

- C) printing the first portion of the color plane onto the printing sheet before printing the second portion of the color plane, wherein printing each of the portions includes printing in successive print swaths, each having a printing width, by translating

the thermal printhead along a print axis orthogonal to the printing sheet translation axis and translating the printing sheet in the direction of the printing sheet translation axis between print swaths.

5 In a further additional aspect, the invention provides a method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, where the method includes the following steps:

10 A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array printing elements extending for a predetermined printing width along a printing sheet translation axis;

15 B) printing first and second portions of the color plane, wherein printing each of the portions includes printing in successive prints swaths having a printing width in the direction of the printing sheet translation axis by successively translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and translating the printing sheet in the direction of the printing sheet translation axis
20 between print swaths; and

 wherein when printing the first portion of the color plane the printing sheet is translated in one direction along the printing sheet translation axis between print swaths and when printing the second portion the printing sheet is translated in the opposite
25 direction between print swaths.

 In another aspect, the invention provides a method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the multicolor
30 graphic product, where the method includes the following steps:

 A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;

35

 B) printing the color plane on the printing sheet in print swaths extending along a print axis and having a selected width along a printing sheet translation axis

substantially orthogonal to the print axis by repeating the following steps 1) and 2) alternately

- 5 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to print on the printing sheet and draw the donor sheet past the printhead;
- 10 2) translating the printing sheet a distance substantially equal to at least the selected width in a selected direction along the printing sheet translation axis; and

15 C) performing steps A) and B) for each of the remaining color planes to be printed to print the multicolor graphic product on the printing sheet; and

wherein after finishing printing a color plane and prior to printing the next color plane, performing the step of:

20 determining whether one of the end of the color plane to be printed next is nearer, in the direction of the printing sheet translation axis, the current position of the printhead than the other end of the color plane to be printed; and

25 when one end is nearer, printing at least part of that portion of the color plane between the printhead and the nearer end of the color plane before printing a least part of portion of the color plane between the printhead and the other end of the color plane.

30 The invention can also include another method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, where the method includes the following steps:

determining that the color plane to be printed includes an object to be knocked out by one of another spot color object and a process color object in the finished graphic product to be printed on the printing sheet;

35 A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array of printing elements extending along a printing sheet translation axis;

B) printing the color plane onto the printing sheet including printing in successive prints swaths, each having a printing width, by translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and selectively energizing the thermal printing elements responsive to the machine readable data and, between printing successive print swaths, translating the printing sheet in the direction of the printing sheet translation axis, and

refraining from printing those areas of the color plane determined to be knocked out.

In another aspect, the invention includes a method for processing data representative of a multicolor graphic product with a computer for printing the multicolor graphic product on a printing sheet in separate color planes with a thermal printer that translates the printing sheet along a printing sheet translation axis and translates a thermal printhead along a print axis perpendicular to the printing sheet translation axis, and wherein the thermal printhead includes an array of thermal printing elements extending along the direction of the printing sheet translation axis for printing in print swaths extending in the direction of the print axis. The method includes the following steps:

providing a machine readable data file including data representative of the multicolor graphic product

selecting a color plane to be printed;

examining the data file to select objects that are of the color of the selected color plane;

associating a rectangular area of the color plane with each object;

combining those areas that are within a selected distance of each other along printing sheet translation axis;

increasing the dimension, of each of the areas, that extends in the direction of the print axis such that the width is an integral number of printing widths;

selecting each of the areas for printing, and when selecting each of the areas, performing the steps of:

dividing the selected area into an integral number of print swaths;

5 selecting each of the print swaths in turn and storing machine readable data
corresponding to the objects to be printed in the selected print swath for instructing the
printer for printing the print swath.

According to the invention there is also provided wide format thermal printer
apparatus. In one aspect, the invention provides a wide format thermal printer for
10 printing a multicolor graphic product onto a printing sheet in separate color planes and
responsive to machine readable data representative of the graphic product. The wide
format thermal printer includes:

15 a workbed including a platen and providing a worksurface for supporting the
printing sheet, the worksurface containing a print axis and printing sheet translation axis
perpendicular to the print axis;

printing sheet translation means for translating the printing sheet in the direction
of the printing sheet translation axis;
20

a thermal printhead translatable in the direction of the print axis, the thermal
printhead including an array of thermal printing elements extending substantially parallel
to the printing sheet translation axis, the thermal printer including a first actuator for
translating the thermal printhead in the direction of the print axis and a second actuator
25 coupled to the printhead for lifting the printhead away from the printing sheet for
refraining from pressing the donor sheet against the printing sheet such that donor
sheet is not drawn past the printhead when the thermal printhead is translated in the
direction of the print axis;

30 donor sheet apparatus including a take-up shaft coupled to a take-up motor and
a supply shaft, the take-up and supply shafts for coupling to take-up rolls and supply
rolls, respectively, of donor sheet, the take-up motor for winding the donor sheet on the
take-up roll after the donor sheet is drawn from the supply roll and interposed between
the thermal printhead and the printing sheet, the donor sheet apparatus being
35 translatable with the thermal printhead in the direction of the print axis;

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

5 a controller in communication with, and for controlling, the printing sheet translation means, the thermal printhead, the take-up motor, the first and second actuators and the means for securing the printing sheet, and wherein the controller includes programming stored in a memory associated therewith for:

10 1) printing a color plane onto the printing sheet in successive print swaths by translating the thermal printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead;

15 2) translating the printing sheet in the direction of the printing sheet translation axis between the printing of successive print swaths; and for

20 3) when printing at least one print swath, determining when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, and upon determining that the consecutive pixel are so separated, lifting the thermal printhead away from the printing sheet when translating the printhead at least part of the distance between the consecutive pixels for substantially preventing donor sheet from being drawn past the printhead, thereby conserving donor sheet.

25 In another aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product where the wide format thermal printer includes the following:

30 a workbed including a platen and providing a worksurface for supporting the printing sheet, the worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

35 printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the

printing sheet translation axis, the thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn
5 past the printhead the thermal printhead is translated in the direction of the print axis;

donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, the take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, the take-up motor for winding the donor sheet on the take-
10 up roll after the donor sheet is drawn from the supply roll and interposed between the thermal printhead and the printing sheet, the donor sheet apparatus being translatable with the thermal printhead in the direction of the print axis;

means for securing the printing sheet to the workbed when printing on the
15 printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

a controller in communication with, and for controlling, the printing sheet translation means, the thermal printhead, the take-up motor, the first and second
20 actuators and the means for securing the printing sheet, and wherein the controller includes programming stored in a memory associated therewith for

A) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to the printing sheet translation axis by
25 repeating the following items 1) and 2) alternately

1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw
30 the donor sheet past the printhead and print on the printing sheet in print swaths extending in the direction of the print axis and having a swath width in the direction of the printing sheet translation axis;

2) translating the printing sheet in the direction of the printing sheet translation axis in an integer number of separate steps, each step
35 translating the printing sheet by a translation increment substantially equal to the printing width;

and

B) wherein 1) includes translating the printing sheet in at least two steps, wherein one of the steps translates the printing sheet by a distance less than the translation increment and the other and any additional steps each translate the printing sheet by the translation increment.

In an additional aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product. The wide format thermal printer includes the following:

a workbed including a platen and providing a worksurface for supporting the printing sheet, the worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, the thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead the thermal printhead is translated in the direction of the print axis;

donor sheet apparatus including a take-up shaft coupled to a take-up motor and a supply shaft, the take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, the take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between the thermal printhead and the printing sheet, the donor sheet apparatus being translatable with the thermal printhead in the direction of the print axis;

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

a controller in communication with, and for controlling, the printing sheet translation means, the thermal printhead, the take-up motor, the first and second actuators and the means for securing the printing sheet, and wherein the controller includes programming stored in a memory associated therewith for

5

A) organizing a selected color plane into selected areas of the color plane, wherein within each area the objects to be printed are within a selected distance of each other along a printing sheet translation axis and wherein the objects within any one area are separated in the direction of the printing sheet translation axis from the objects in the other areas by a distance greater than the selected distance;

10

B) printing each of the areas of the color plane on the printing sheet in print swaths extending along a print axis orthogonal to the printing sheet translation axis and having a swath width in the direction of the printing sheet translation axis by repeating the steps 1) and 2) alternately

15

1) a) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor sheet past the printhead; and before printing the next area

20

b) translating the printing sheet in the direction of the printing sheet translation axis, by a selected increment substantially equal to the swath width, between successive print swaths, and alternately repeating steps a) and b) as necessary until the area is printed; and

25

2) translating the printing sheet in the direction of the printing sheet translation axis by the distance substantially equal to the distance separating the area printed in 1) above and the next area to be printed.

30

In yet a further aspect, the invention provides a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, where the wide format thermal printer includes:

35

a workbed including a platen and providing a worksurface for supporting the printing sheet, the worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

5 a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, the thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis;

10 donor sheet apparatus including a take-up shaft coupled to a take-up motor and a supply shaft, the take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, the take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between the thermal printhead and the printing sheet, the donor sheet apparatus being
15 translatable with the thermal printhead in the direction of the print axis;

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

20 a controller in communication with, and for controlling, the printing sheet translation means, the thermal printhead, the take-up motor, the first and second actuators and the means for securing the printing sheet, and wherein the controller includes programming stored in a memory associated therewith for:

25 A) selecting first and second portions of the color plane to be printed on the printing sheet, the selecting including

30 determining the end in the direction of the printing sheet translation axis of the color plane to which the printhead is currently the nearest; and

selecting the first portion of the color plane to be between the printhead and the nearer end of the color plane and the second portion to be the remainder of the color plane; and

35 B) printing the first portion of the color plane onto the printing sheet before printing the second portion of the color plane, wherein printing each of the portions includes printing in successive print swaths, each having a printing width, by translating

the thermal printhead along a print axis orthogonal to the printing sheet translation axis and selectively energizing the thermal printing elements responsive to the machine readable data representative of the multicolor graphic product and translating the printing sheet in the direction of the printing sheet translation axis between print swaths.

5

In another aspect, there is provided according to the invention a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, where the wide format thermal printer includes:

10

a workbed including a platen and providing a worksurface for supporting the printing sheet, the worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

15

printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

20

a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, the thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead the thermal printhead is translated in the direction of the print axis;

25

donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, the take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, the take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between the thermal printhead and the printing sheet, the donor sheet apparatus being translatable with the thermal printhead in the direction of the print axis

30

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

35

a controller in communication with, and for controlling, the printing sheet translation means, the thermal printhead, the take-up motor, the first and second

actuators and the means for securing the printing sheet, and wherein the controller includes programming stored in a memory associated therewith for:

- 1) determining from the machine readable data that a first color plane to be
5 printed before a second color plane includes at least one object including a portion to be knocked out by an object of the color of the second color plane;
- 2) printing the first a color plane onto the printing sheet in successive print
10 swaths, each having a printing width, by translating the thermal printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead and, between successive print swaths, translating the printing sheet in the direction of the printing sheet translation axis between print swaths; and
- 15 3) refraining from printing that portion of the object determined to be knocked out.

Printing Sheet Alignment & Tracking

20

In another aspect, the invention provides an apparatus for supporting a sheet material on a worksurface with a selected alignment and for performing work operations on the sheet material responsive to a controller. The apparatus includes a workbed providing the worksurface for supporting the sheet material, where the worksurface
25 contains a workhead axis and a sheet material translation axis perpendicular to the workhead axis; a workhead for performing the work operation upon the sheet material, the workhead being translatable parallel to the work axis for printing on the sheet material; means for securing the sheet material to the worksurface when working on the sheet material and for releasing the sheet material from the worksurface when
30 translating the sheet material; sensing means for sensing an edge of the sheet material; and sheet material translation means for translating the sheet material in the direction of the sheet material translation axis. The sheet material translation means includes means for differentially driving spaced portions of the sheet material, responsive to the sensing means, for providing a selected alignment of the sheet material relative to the
35 worksurface.

In another aspect, the invention provides an apparatus for supporting a sheet material on a worksurface with a selected alignment for performing work operations on the sheet material. The apparatus includes a workbed for providing the worksurface for supporting the sheet material, where the worksurface containing a work axis and sheet material translation axis perpendicular to the work axis; sheet material translation means for translating the sheet material in the direction of the sheet material translation axis; a workhead for performing the work operations upon the sheet material, the workhead being translatable parallel to the work axis; means for securing the sheet material to the worksurface when printing on the sheet material and releasing the sheet material from the worksurface when translating the sheet material; and an edge sensor for sensing an edge of the sheet material. The sensor is mounted with the workhead for translation therewith in the direction of the work axis.

The apparatus also includes a controller in communication with the workhead, the sheet material translation means and the sensing means for controlling the work operation on the sheet material responsive to data stored in a memory. The controller includes programming, stored in a memory associated therewith, for determining the alignment of the sheet material, the programming including instructions for the following: translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a first communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; energizing the sheet material translation means for translating the sheet material a known distance in the direction of the sheet material translation axis; translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a second communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; and determining the skew of the sheet material responsive to the first and second communications and the known translation distance.

In yet another aspect, the invention provides an apparatus for supporting a sheet material on a worksurface with a selected alignment for performing work operations on the sheet material. The apparatus includes a workbed for providing the worksurface for

supporting the sheet material, where the worksurface containing a work axis and sheet material translation axis perpendicular to the work axis; sheet material translation means for translating the sheet material in the direction of the sheet material translation axis; a workhead for performing the work operations upon the sheet material, the workhead being translatable parallel to the work axis; means for securing the sheet material to the worksurface when printing on the sheet material and releasing the sheet material from the worksurface when translating the sheet material; and an edge sensor for sensing an edge of the sheet material, where the sensor is mounted with the workhead for translation therewith in the direction of the work axis.

The apparatus further includes a controller in communication with the workhead, the sheet material translation means and the edge sensor for controlling the work operation on the sheet material responsive to data stored in a memory. The controller further includes programming, stored in a memory associated therewith, for determining the alignment of the sheet material. The programming includes instructions for the following: translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a first communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; energizing the sheet material translation means for translating the sheet material a known distance in the direction of the sheet material translation axis; translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a second communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; and determining the skew of the sheet material responsive to the first and second communications and the known translation distance.

In yet an additional aspect, the invention includes an edge detection system for providing signals to a controller for detecting the edge of a sheet material in an apparatus that includes a worksurface for supporting the sheet material, drive means for translating the sheet material along a sheet material translation axis and a workhead translatable along a work axis perpendicular to the sheet material translation axis for performing work operations on the sheet material. The edge detection system includes a first sensor mounted for translation in the direction of the work axis along with the workhead and facing the worksurface for detecting light traveling in a direction upward

from the worksurface toward the sensor; and a second sensor for providing signals responsive to the position of the first sensor in the direction of the work axis.

5 In a further aspect, the invention includes a method of aligning a sheet material disposed upon a worksurface for enhancing printing or other operations on the sheet material. The method includes the following steps: placing the sheet material over the worksurface; determining the alignment of the sheet material in a coordinate system having first and second axes for specifying locations relative to the worksurface and the sheet material overlaying the worksurface; and differentially driving spaced portions of
10 the sheet material for moving the sheet material for providing a selected alignment of the sheet material.

In general, the invention is deemed useful in many environments where a workbed includes a worksurface for supporting a sheet material on which work
15 operations are to be performed. For example, "work operations" can include, but is not limited to, plotting, cutting or printing, such that the workhead mounts, as is appropriate, a pen; cutter, such as a knife; roller or laser cutter; or a printhead, such as a thermal printhead.

20 Thermal Printhead Assembly

In still a further aspect, the invention provides a replaceable thermal printhead assembly for use in a thermal printer to press a donor sheet against a printing sheet and, responsive to communication from a controller associated with the printer, print
25 graphic products on the printing sheet material. The thermal printhead assembly includes the following: an array of thermal printing elements; drive electronics for selectively energizing the thermal printing elements responsive to communications received from the controller associated with the printer; and a semiconductor element mounted with the drive electronics and the array of thermal printing elements, the
30 semiconductor element including a memory storing data characteristic of the printhead assembly.

In another aspect of the invention, the thermal printhead assembly can be adapted for mounting to the printer by a single coupling joint, which can be a trunnion joint, extending along a trunnion axis.

5 In an additional aspect, the invention provides a method of operating a thermal printer that presses a donor sheet material against a printing sheet with a thermal printhead assembly and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead assembly and translates the printing sheet for printing graphic products on a selected area of the printing sheet. The method includes
10 the steps of: providing a thermal printhead assembly having the following: thermal printing elements; drive electronics for selectively energizing the thermal printing elements; and a semiconductor element including a memory storing data characteristic of the thermal printhead; reading the data characteristic of the printhead from the memory; and energizing the thermal printing elements with the drive electronics
15 responsive to the data read from the memory for printing the graphic products on the printing sheet.

In yet a further aspect, the invention provides a method of operating a thermal printer that presses a donor sheet material against a printing sheet with a thermal
20 printhead assembly and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead and translates the printing sheet for printing graphic products on the printing sheet, comprising the steps of: providing a thermal printhead assembly that includes the thermal printing elements, drive electronics for selectively energizing the thermal printing elements and a semiconductor element
25 including a memory storing data characteristic of the printhead; energizing the thermal printing elements with the drive electronics for printing the graphic products on the printing sheet; removing the thermal printhead assembly from the printer; measuring data characteristic of the thermal printhead assembly; reading the data characteristic of the thermal printhead assembly from the memory; and comparing the measured data
30 characteristic of the thermal printhead assembly to the data characteristic of the thermal printhead assembly read from the memory.

According to the invention, the data characteristic of the printhead assembly can include the following: data representative of the resistances of the thermal printing
35 elements, such as data representative of an average resistance of the thermal printing elements, data representative of the individual resistance of each of a plurality of the printhead head thermal printing elements, and data representative of the individual resistance of each of the printhead thermal printing elements normally used in printing.

In addition, the data characteristic of the printhead assembly can also include data representative of the history of use of the thermal printhead assembly, such as the following: data representative of total time of use of the printer with the thermal
5 printhead assembly installed thereon; data representative of the total amount of time the thermal printhead has spent pressing donor sheet against printing sheet and printing; data representative of the total distance traveled by the printhead assembly while pressing donor sheet against printing sheet and printing; data representative of the total
10 distance traveled by the printhead assembly while pressing selected donor sheet against selected printing sheet; data representative of the voltages that have been applied to selected thermal printing elements; and data representative of a number of printing pulses that have been communicated to selected thermal printing elements.

15 Vacuum Workbed

In an additional aspect, the invention provides a vacuum workbed for supporting a sheet material to be worked upon. The vacuum workbed includes the following: a workbed having a worksurface for supporting the sheet material, the worksurface
20 including a plurality of apertures for applying suction to the sheet material, the apertures separated into first and second zones for accommodating sheet material of different sizes and orientations; a suction source for applying suction to the apertures; a manifold for providing fluid communication between the suction source and the apertures for applying the suction thereto; and a sensor in fluid communication with the suction
25 source for providing a signal responsive to the degree of vacuum drawn by the suction source on the apertures. The flow rate through one of the zones of apertures is restricted for producing a greater than nominal degree of vacuum when the one zone includes unblocked apertures.

30 In another aspect, the invention provides a vacuum workbed for supporting a sheet material to be worked upon. The vacuum workbed includes the following: a workbed having a worksurface for supporting the sheet material, where the worksurface includes a plurality of apertures separated into a plurality of zones; a suction source for applying suction to the apertures; a first manifold for providing fluid communication
35 between the suction source and a first group of zones; and a second manifold for providing fluid communication between the suction source and a second group of zones. The first and second groups include at least one zone each. The vacuum workbed of the invention also includes a sensor in fluid communication with the suction

source for providing a signal responsive to the degree of vacuum drawn by the suction source on the apertures, a first flow control valve fluidly interposed between the first group and the suction source, and a second flow control valve fluidly interposed between the second group and the suction source. The first flow control valve is fluidly
5 interposed between the second flow control valve and the suction source.

The first group can include first and second zones and the second group can include third, fourth and fifth zones. The workbed can include first and second flow restriction elements interposed between the first and second zones, respectively, and
10 the suction source, and third, fourth and fifth flow restriction elements, interposed, respectively, between the third, fourth and fifth zones and the suction source. The flow restriction elements are for providing a selected flow rate through the zones of apertures when unblocked.

15 In yet a further aspect, the invention provides a method of automatically determining the size or orientation of a sheet material supported by a workbed having suction apertures therein. The method includes the following steps:
a) grouping the apertures into N groups of apertures; b) applying suction to one of the groups of apertures; c) incrementing the number of groups to which suction is applied
20 by applying suction to an additional group and sensing the difference in the degree of vacuum attained between the application of suction prior to and subsequent to incrementing the number of groups; d) determining from the difference whether the additional group includes unblocked apertures; and when determining in the prior step that the additional group does not include unblocked apertures, repeating steps c) and
25 d) until one of: a determination is made in step d) that the additional group does include unblocked apertures; and no groups remain.

In an additional aspect, the invention provides a method of supporting sheet materials of varying sizes for performing work operations thereon. The method includes
30 the following steps: providing a workbed having a worksurface for supporting the sheet material, the worksurface including first and second groups of apertures; applying suction to the apertures; sensing a selected number of times the degree(s) of vacuum attained during the step of applying suction and providing a selected number of signals responsive to the degree(s) of vacuum; and determining from the selected number of
35 signals one of the following: that all apertures are blocked; that a first group of apertures is blocked and a second group of apertures includes unblocked apertures; and that both first and second groups of apertures include unblocked apertures.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates one embodiment of a wide format thermal printer according
5 to the invention.

FIGURE 2 illustrates one embodiment of the printhead carriage of the wide
format thermal printer of FIGURE 1.

10 FIGURE 3 is a perspective view of the cassette storage rack of the wide format
thermal printer of FIGURE 1 and of a donor sheet cassette mounted on the rack.

FIGURE 4A is a cutaway view of the upper portion of the wide format thermal
printer of FIGURE 1, including a front elevational view of the printhead carriage of
15 FIGURE 2.

FIGURE 4B is side elevational view of the donor sheet handling apparatus,
including a cassette receiving station, for slidably mounting to the base structure of the
printhead carriage of FIGURE 2.

20

FIGURE 5 is a top view of the wide format thermal printer of FIGURE 1 showing
the work surface, the printhead carriage of FIGURE 2, one of the magnetic clamps and
the cassette storage rack including four (4) cassette storage trays.

FIGURES 6A and 6B illustrate cross-sectional and end views, respectively, of
25 one of the magnetic clamps, including the keeper, of the wide format thermal printer of
FIGURE 1.

FIGURE 7 illustrates a top view of the work surface of the workbed of the wide
format thermal printer of FIGURE 1 showing suction apertures in the worksurface for
30 selectively securing the printing sheet to the worksurface. FIGURE 7 is drawn as if the
workbed is transparent such that the apparatus below the workbed is readily visible.

FIGURE 8 illustrates suction apparatus for selectively applying suction to the suction apertures in the worksurface illustrated in FIGURE 7.

FIGURES 9A and 9B schematically illustrate alternative embodiments of the apparatus illustrated in FIGURES 7 and 8.

FIGURE 10A illustrates a donor sheet assembly for loading into the donor sheet cassette shown in FIGURE 3.

FIGURE 10B illustrates a front view of the donor sheet assembly of FIGURE 10A.

FIGURE 11A illustrates the supply core tubular body of the donor sheet assembly of FIGURES 10A and 10B.

FIGURE 11B is an enlarged view of the drive end of the supply core tubular body shown in FIGURE 11A.

FIGURE 11C is an end view of the supply core tubular body of FIGURE 11A, taken along line C-C in FIGURE 11A.

FIGURE 11D is an end view of the supply core tubular body of FIGURE 11A, taken along the line D-D in FIGURE 11A.

FIGURE 12 is a front view of the donor sheet cassette of FIGURE 3 with the cover removed.

FIGURES 13A and 13B show front and side views, respectively, of the donor sheet cassette cover of the donor sheet cassette of FIGURE 12.

FIGURE 14 illustrates the donor sheet cassette cover of FIGURE 13 mounted to the donor sheet cassette of FIGURE 12.

FIGURE 15A illustrates method and apparatus for more economically providing donor sheet to the wide format thermal printer of FIGURE 1 and for reducing the cost of printing a given multicolor graphic product.

5 FIGURE 15B is a flow chart illustrating one sequence for reading data from and writing data to the memory element mounted with core tubular body of FIGURES 11.

FIGURE 16A illustrates the edge of the printing sheet when the printing sheet is skewed relative to the printing sheet translation (X) axis of the wide format thermal
10 printer of FIGURE 1.

FIGURE 16B illustrates the effect of translating the skewed printing sheet of FIGURE 16A in one direction along the printing sheet translation (X) axis.

15 FIGURE 16C illustrates the effect of translating the skewed printing sheet of FIGURE 16A in the opposite direction along the printing sheet translation (X) axis.

FIGURES 17A and 17B show top and elevational views, respectively, of selected components of the wide format thermal printer of FIGURE 1, and illustrate an edge
20 sensor and a reflective strip for detecting the location of the edge of the printing sheet shown in FIGURES 16A-16C.

FIGURE 17C illustrates one technique for determining the skew of the printing sheet from measurements made with the edge sensor of FIGURES 17A and 17B.
25

FIGURE 18 illustrates selective actuation of the translatable clamps of the translatable clamp pair of the wide format printer for aligning the printing sheet.

FIGURE 19A illustrates a side elevational view of a printhead assembly of the
30 present invention.

FIGURE 19B illustrates of view of the printhead assembly of FIGURE 19A taken along line 19B-19B of FIGURE 19A.

5 FIGURE 20 illustrates the technique of Y axis conservation for reducing the amount of donor sheet consumed by the wide format thermal printer of the present invention.

10 FIGURES 21A and 21B illustrate alternative techniques for printing with the wide format printer of the present invention, where FIGURE 21B illustrates the technique of X axis conservation for consuming less donor sheet than the technique of FIGURE 21A.

FIGURE 22A illustrates two banners to be included in the multicolor graphic product printed by the wide format thermal printer of the present invention.

15 FIGURE 22B illustrates textual objects to be included with the banners of FIGURE 22A in the multicolor graphic product to be printed by the wide format printer of the present invention.

20 FIGURE 22C illustrates the placement of textual objects of FIGURE 22B over the banners of FIGURE 22A in the multicolor graphic product such that portions of the banners are "knocked out."

25 FIGURE 22D illustrates one of the banners of FIGURE 22C including those "knocked out" portions that are not printed when printing the banner.

FIGURE 23 illustrates a technique for printing with the wide format thermal printer for reducing the time it takes to print a multicolor graphic product on the printing sheet.

30 FIGURE 24A is a flow chart illustrating one data processing technique for determining those objects of the multicolor graphic product that are part of a selected color plane and for generating print slices corresponding to the selected objects.

FIGURE 24B is a flow chart illustrating one data processing technique for combining the print slices in accordance with the flow chart of FIGURE 24A.

5 FIGURE 25A is a flow chart illustrating additional steps, including selecting the direction of translation of the printing sheet for reducing the time for printing the multicolor graphic product in accordance with FIGURE 23 and for dividing the print swipes into print swaths.

10 FIGURE 25B is a flow chart illustrating additional steps including a technique for processing data so as to refrain from printing the knocked-out areas of FIGURES 22A-22D.

15 FIGURE 25C is a flow chart indicating the printing of the selected color plane on the printing sheet in print swaths, including performing the Y axis conservation shown in FIGURE 20 for each print swath.

20 FIGURE 26 is a flow chart illustrating one procedure for processing data in accordance with the flow chart of FIGURE 25C to create subswaths for performing the Y axis donor sheet conservation illustrated in FIGURE 20.

FIGURE 27A illustrates an example of a multicolor graphic product to be printed by the wide format thermal printer of the present invention.

25 FIGURE 27B illustrates the creation of bounding rectangles around those objects of the multicolor graphic product of FIGURE 27A which are to be printed in the selected color plane.

FIGURE 27C illustrates combining two slices, which correspond to the bounding rectangles of FIGURE 27B, to form a combined slice.

30 FIGURE 27D illustrates combining the combined slice of FIGURE 27C with another slice of FIGURE 27C to form a combined slice.

FIGURE 27E illustrates combining the combined slice of FIGURE 27D with another slice of FIGURE 27D to form a combined slice.

FIGURE 27F illustrates increasing the width of the combined slice of FIGURE 27E to be an integral number of printing widths of the thermal printhead of the wide format thermal printer of the present invention.

FIGURE 27G illustrates combining the slice of FIGURE 27F having the increased width with another slice of FIGURE 27F to form a combined slice.

10

FIGURE 27H illustrates dividing the slices of FIGURE 27G into print swaths.

FIGURE 27I illustrates counting consecutive blank rows in one of the print swaths of FIGURE 27I in accordance with the flow chart of FIGURE 26.

15

FIGURE 27J illustrates the formation of sub swaths as result of the counting of the consecutive blank rows in FIGURE 27I and in accordance with flow chart of FIGURE 26.

20

FIGURE 28 is a flowchart illustrating the steps followed to energize the take-up motor and the brake to provide a selected tension on the donor sheet.

FIGURES 29A and 29B schematically illustrate one example of the on board controller 22A and the interfacing of the on board controller 22A with other components of the wide format printer 10.

25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIGURE 1 illustrates one embodiment of a wide format thermal printer 10 according to the invention. The wide format thermal printer 10 includes a base structure 12 that supports a workbed having a work surface 14 for supporting a printing sheet 16 onto which a multicolor graphic product is to be printed. A guide surface 20 can be

30

provided for guiding the printing sheet 16 as it travels from the printing sheet supply roll 17 to the work surface 14. A printing sheet drive motor, indicated generally by reference numeral 18, can be provided at the other end of the printing sheet supply roll 17 for rotating the printing sheet supply roll 17. The wide format thermal printer 10 prints the multicolor graphic product onto the printing sheet 16 in separate color planes and responsive to a controller(s), such as the "on-board" controller 22A, and responsive to machine readable data representative of the graphic product. The machine readable data can be stored either on the on-board controller 22A or on additional controllers (not shown in FIGURE 1) located remote to the wide format thermal printer 10 and in communication with the on-board controller 22A. Reference numeral 22 is used herein to generally refer to the controller(s), whether on-board or otherwise, associated with the wide format thermal printer 10. The printing sheet 16 exits the printer 10 at the other end of the work surface 14.

The wide format thermal printer 10 prints each color plane by interposing a section of a donor sheet (not shown in FIGURE 1) corresponding to the color of the section of the donor sheet interposed between the thermal printhead 24 and the printing sheet 16. The multicolored graphic product is printed on the printing sheet 16 in individual print swaths, as indicated by reference numeral 28, that extend along a print axis, also referred to herein as the "Y-axis", and have a selected printing width, or swath width, along a printing sheet translation axis, also referred to herein as the "X-axis". The print (Y) axis and the printing sheet translation (X) axis define a plane substantially parallel to the plane of the work surface 14 of the workbed. The thermal printhead 24 presses the section of donor sheet against the printing sheet 16 and selectively energizes an array of thermal printing elements 26, which extends along a printing sheet translation (X) axis, as the thermal printhead 24 is translated along the print (Y) axis. The array of thermal printing elements is energized responsive to the machine readable data and the controller(s) 22.

A printhead carriage 30 mounts the thermal printhead 24 and includes a cassette receiving station for receiving a cassette 32 of the donor sheet. The cassette 32 includes a supply roll of donor sheet, typically including a supply length of donor sheet

wound on a supply core tubular body, and a take-up roll for receiving the donor sheet after it has been interposed between the thermal printhead 24 and the printing sheet 16. The take-up roll includes the consumed length of donor sheet wound on a take-up core tubular body.

5

The printing drive motor 36 translates the printhead carriage 30, and hence the thermal printhead 24, along the print (Y) axis by rotating the printhead ball screw 38. The printhead guide rails 40 guide the thermal printhead 24 as it travels along the print (Y) axis. A pair of translatable clamps, indicated generally by reference numeral 42, translate the printing sheet 16 along the printing sheet translation (X) axis between the printing of print swaths such that adjacent print swaths align to print a color plane of the multicolor graphic product. The first and second clamps, 44 and 46 respectively, are each movable between clamped and unclamped conditions relative to the printing sheet 16 supported on the work surface 14 and each extend from a first end 50 to a second end 52 across the work surface 14 and parallel to the print (Y) axis. The print swath 28 shown as being printed in FIGURE 1 extends parallel to the print (Y) axis in an area between the clamps 44 and 46.

10

15

The clamp pair fixture 54A mechanically couples the first ends 50 of the clamps 44 and 46 to one another such that the clamps 44 and 46 are substantially fixedly spaced from one another in the direction of the printing sheet translation (X) axis. A guide rod 56 supports and guides the clamp pair fixture for translation along the printing sheet translation (X) axis. The clamp actuator 58 is coupled to the clamp pair fixture 54A via the ball screw 60 for rotating the ball screw and translating the clamp pair 42 parallel to the printing sheet translation (X) axis. The second ends of the clamps 52 are also mechanically coupled by a clamp pair fixture supported by a guide rod (both not shown in FIGURE 1). An additional actuator may be provided for translating the second ends 52 of the clamps 44 and 46 independently of the first ends 50 of the clamps 44 and 46. Independent translation of the first and second ends of the clamps can be particularly advantageous when aligning the printing sheet 16 to the work surface 14, as discussed in more detail below.

25

30

In the process of printing a particular color plane on the printing sheet 16, the clamp pair 42 reciprocates back and forth along the printing sheet translation (X) axis between first and second positions. For example, after the thermal printhead 24 prints a print swath, the clamp pair 42 clamps the printing sheet 16 and moves to a second position to translate the sheet a distance typically equal to the width of one print swath 28. The clamp pair 42 then returns to its original position so as to be ready to translate the printing sheet 16 again after the next swath is printed. The thermal printhead is then translated along the print (Y) axis and prints the next swath. The above cycle repeats until a complete color plane is printed on the printing sheet. Preferably, only one clamp of the clamp pair 42 clamps the printing sheet at a time, and the printing sheet 16 is pulled by the clamp pair 42 rather than pushed. For example, when translating the printing sheet away from the supply roll 17, the clamp 44 is in the clamped condition for clamping the printing sheet 16 and the clamp 46 is in the unclamped condition. If translating the printing sheet 16 in the opposite direction from that described above, the clamp 46 clamps the printing sheet and the clamp 44 is in the unclamped condition.

According to the invention, the wide format printer 10 can print the multicolor graphic product on the printing sheet 16 by translating the printing sheet in both directions along the printing sheet translation (X) axis. For example, when printing one color plane, the translatable clamp pair 42 translates the printing sheet in one direction along the printing sheet translation (X) axis between successive print swaths, and when printing a different color plane, the translatable clamp pair can translate the printing sheet 16 in the opposite direction between successive print swaths. Additionally, it can be advantageous to translate the printing sheet in both directions along the printing sheet translation axis when printing a single color plane. For example, one portion of the color plane can be printed by translating the printing sheet in one direction along the printing sheet translation (X) axis between successive print swaths and another portion printed by translating the printing sheet in the opposite direction between successive print swaths.

Prior art printers that print in separate color planes often avoid printing in both directions due to the difficulty of providing proper registration between the color planes.

One technique known in the art is to print a registration mark at one end (along the printing sheet translation (X) axis) of the printing sheet, and print each color plane starting at that registration mark and proceeding towards the opposite end of the printing sheet. Thus the printing sheet must be "rewound" between successive color planes so that the printing of the next plane can also start at the registration mark. The present invention advantageously allows printing in both directions, avoiding the need to "rewind" the printing sheet.

The wide format thermal printer 10 also includes apparatus (not shown) for securing the printing sheet 16 to the work surface 14 of the workbed when printing on the printing sheet 16 and releasing the printing sheet 16 from the work surface 14 when translating the printing sheet 16 in the printing sheet translation (X) axis. Such apparatus for securing the printing sheet can include suction apertures formed in the work surface 14 of the workbed and a suction source coupled to the suction apertures for applying suction to the printing sheet 16, and/or, as understood by one of ordinary skill in the art, electrostatic apparatus or mechanical clamps for clamping the printing sheet 16 to the work surface 14. The preferred apparatus for securing the printing sheet is described in more detail below.

The wide format printer can include a cassette storage rack 55 for storing cassettes 32 that are not in use. The cassette storage rack 55 extends generally parallel to the print (Y) axis and can mount a plurality of donor sheet cassettes 32 in a row. As discussed in more detail below, the cassette receiving station of the printhead carriage 30 can include a translatable engaging element for engaging a donor sheet cassette 32 stored on the cassette storage rack 55 and transporting the cassette 32 between the cassette receiving station and the cassette storage rack 55. The printhead carriage 30 includes donor sheet handling apparatus for, in conjunction with the cassette 32, interposing a section of the donor sheet between the thermal printhead 24 and the printing sheet 16 supported by the work surface 14. The cassette storage rack 55 can include donor sheet cassettes 32 that include spot color donor sheet, such that the wide format printer of the present invention can advantageously print an enhanced

multicolor graphic product by easily incorporating both spot and process colors into the final printed multicolor graphic product.

The wide format thermal printer 10 can also include a user interface 61 for
5 controlling the basic operating functions of the printer 10. Typically, however, the printer 10 is controlled from a remote controller 22, e.g., a workstation, that communicates with the on-board controller 22A. Preferably, the wide format thermal printer also includes squeegee bars 62 (only one of which can be shown in FIGURE 1) for pressing against the printing sheet 16 for cleaning the printing sheet 16 and for providing a selected drag
10 on the printing sheet 16 when the sheet 16 is translated along the printing sheet translation (X) axis. The squeegee bars can include brushes 63 that can be electrically grounded for dissipating static charge. Typically, the squeegee bars are operated by actuators (not shown), such as solenoids, that are controlled by the controller(s) 22 for selectively lifting the squeegee bars 62 away from the printing sheet material. The other
15 squeegee bar is typically located at the opposite end (in the direction of the printing sheet translation (X) axis) of the work surface 14, and each includes an independently controllable actuator.

Preferably, the printing sheet 16 forms a hanging loop 64 between the printing
20 sheet and the guide surface 20. The hanging loop 64 helps maintain proper tension on the printing sheet 16, such that it is properly translated by the translatable clamp pair 42. The hanging loop optical sensor 66 sensing the presence of a proper hanging loop 64 and a printing sheet supply roll motor 18 (not shown) responsive to the hanging loop optical sensor 66, rotates the printing sheet supply roll 17 accordingly to maintain the
25 proper hanging loop 64.

For simplicity, the wide format printer 10 and its various components, such as the printhead carriage 30, the donor sheet cassette 32, and the cassette storage rack 55, are indicated very generally and schematically in FIGURE 1. The ensuing description
30 and FIGURES provide additional detail and description of the wide format printer 10, and in particular of the printhead carriage 30 and the donor sheet cassette 32.

FIGURE 2 illustrates a preferred embodiment of the printhead carriage 30. The printhead carriage 30 includes a base structure 68 that receives the printhead guide rails 40 and the printhead ball screw 38 for translation of the base structure 68 parallel to the print (Y) axis. The base structure 68 pivotably mounts a cantilever arm 72 for pivoting about a pivot pin 70 that extends along a pivot axis that is generally parallel to the printing sheet translation (X) axis and perpendicular to the print (Y) axis. A second pivot pin 76 couples the pivot actuator 74 to the base 68 and to the other end 78 of the cantilever arm 72. The pivot actuator 74 is typically a stepper motor that rotates a lead screw 80 that is received by the threaded nut 82. The threaded nut 82 attaches to a support 86 that defines a slot 88 for engaging a pin 90 coupled to the end 78 of the cantilever arm 72. A bias spring 92 is inserted between the end 78 of the cantilever arm 72 and an upper surface of the support 86. The cantilever arm 72 mounts the thermal printhead 24. The pivot actuator 74 raises and lowers the printhead by pivoting the cantilever arm 72. The bias spring 92 allows the pivot actuator 74 to selectively advance the lead screw 80, after the printhead 24 has contacted the printing sheet 16, for pressing the donor sheet between the thermal printhead 24 and the printing sheet 16 with a selected pressure

The base structure 68 mounts a donor sheet handling apparatus 94 that includes a cassette receiving station 96. The cassette receiving station 96 includes a take-up shaft 100 and take-up shaft drive elements 102 rotationally coupled to a take-up drive motor 104. The supply shaft 106 includes supply shaft drive elements 108 that are rotationally coupled to a magnetic brake (not shown) mounted behind the cassette receiving station 96.

The cassette receiving station 96 is adapted for receiving a donor sheet cassette 32, such that a section of the donor sheet threaded between supply and take-up rolls of the cassette is positioned under the thermal printhead 24 for being interposed between the printhead 24 and the printing sheet 16. The supply shaft and take-up shaft drive elements 108 and 102 engage drive elements mounted with the donor sheet cassette 32 and are rotationally coupled to the supply and take-up rolls of the donor sheet cassette 32. One of ordinary skill in the art, apprised of the disclosure presented herein,

understands that the present invention can be practiced by manually loading a donor sheet cassette 32 onto the cassette receiving station 96. That is, a donor sheet cassette 32 would be selected from the cassette storage rack 55, which need not be mounted on the wide format thermal printer 10, and the cassette placed onto the receiving station 96 for printing the color plane of the multicolor graphic product corresponding to the color of the donor sheet mounted within the cassette 32.

Furthermore, one of ordinary skill in the art also understands that the supply and take-up rolls of donor sheet can be mounted directly on the take-up and supply shafts, 100 and 106, respectively, and appropriate guide apparatus, such as pins, arranged with the cassette receiving station 96, for aiding in interposing the donor sheet between the thermal printhead 24 and the printing sheet 16.

However, one of the advantages of the present invention is that it can provide for relatively unattended printing of several or all of color planes of the multicolor graphic product. Accordingly, provision is made for the automatic loading and unloading of donor sheet cassettes 32 to and from the cassette storage rack 55. The cassette receiving station 96 mounts a cassette transport apparatus 112 that extends from the receiving station 96 toward the cassette storage rack 55. The cassette transport apparatus 112 includes a translatable engaging element 114 that can be translated to the far end of the cassette transport apparatus 112 for engaging a donor sheet cassette 32 stored on the cassette storage rack 55. The engaging apparatus 114 is carried by a toothed drive belt 116 that is mounted by a belt support bed 118. The belt drive motor 120 is coupled to the toothed drive belt 116 for moving the toothed drive belt 116 about the belt support bed for translating the engaging tab 114 away and toward the cassette receiving station 96.

The base structure 68 slidably mounts the cassette receiving station 96 via a pair of slides, one of which is visible in FIGURE 2 and indicated by reference numeral 122. The cassette receiving station 96 can thus slide up and down in the direction of the Z axis, as indicated by the arrows 124. To move the cassette receiving station 96 upward, the pivot actuator 74 pivots the cantilever arm 72 upward such that the cantilever arm 72 contacts the cassette receiving station 96. Further movement of the cantilever arm

72 upward by the pivot actuator 74 then moves the cassette receiving station 96 upward along the slides, such as slide mount 122, moving the belt support bed 118 upward. As a result of this upward movement, when the cassette engaging element 114 is at the end of the belt support bed 118 and is correctly positioned, along the print (Y) axis, under a donor sheet cassette 32 on the cassette storage rack 55, the cassette engaging element 114 engages that donor sheet cassette 32.

To retrieve a donor sheet cassette 32 and mount the cassette onto the cassette receiving station 96, the printing drive motor 36 is instructed to drive the printhead carriage 30 such that it is opposite a selected donor sheet cassette 32 stored on the cassette storage rack 55. The belt drive motor 120 then drives the toothed drive belt 116 to translate the translatable engaging element 114 to the end of the belt support bed 118, such that the translatable engaging element 114 is positioned under a donor sheet cassette 32. Next, the pivot actuator 74 pivots the cantilever arm 72 upward such that the cantilever arm 72 contacts and drives the cassette receiving station 96 upward so that the translatable engaging element 114 engages a notch in the donor sheet cassette 32. The belt drive motor 120 then drives the toothed drive belt 116 in the opposite direction, such that the donor sheet cassette 32 is drawn towards the cassette receiving station 96. As the donor sheet cassette 32 is drawn towards the cassette receiving station 96, the shaft drive elements 102 and 108 are slightly rotated so that they properly engage drive elements mounted with the donor sheet cassette 32. The belt drive motor 120 thus pulls the donor sheet cassette towards the cassette receiving station 96 until it is properly mounted with the station and engages the shaft drive elements 102 and 108. The procedure is reversed for returning a donor sheet cassette 32 to the cassette storage rack 55.

After retrieving a selected donor sheet cassette 32, the pivot actuator 74 lowers the cantilever arm 72 such that the printhead 24 presses a section of the donor sheet against the printing sheet 16 supported by the work surface 14. Stops are included for limiting the downward travel of the cassette receiving station 96.

Note that the cantilever arm 72 can include provision for cooling the thermal printhead 24. The cantilever arm 72 can mount a blower 126 that draws air into the cantilever arm 72, as indicated by reference numeral 128. Internal cavities in the arm channel the air towards the printhead 24, as indicated by reference numeral 130. The air then exits the cantilever arm 72, as indicated by reference numerals 132, after being blown over cooling fins 133, which are in thermal communication with the thermal printhead 24. Additional detail on thermal printhead 24 and the thermal management thereof is given below.

FIGURE 3 is a perspective view of the cassette storage rack 55 and donor sheet cassettes 32. The cassette storage rack 55 includes individual cassette storage trays, such as tray 134, each for storing a donor sheet cassette 32. Cassette storage trays 134 can pivot backwardly for accessing a donor sheet cassette 32, such as donor sheet cassette 32B, for removing the donor sheet therefrom or for adding the donor sheet thereto. As described in more detail below, the donor sheet cassettes 32 are refillable precision donor sheet cassettes that accept replaceable donor sheet assemblies that include supply and take-up rolls. Each of the cassette storage trays 134 include a back portion 136 and a seat portion formed by legs 138 for supporting a donor sheet cassette 32.

The donor sheet cassette 32A is now described in additional detail to further illustrate the invention. The donor sheet cassette 32A includes an upper portion 140 and a lower portion, indicated generally by reference numeral 142. The upper portion 140 houses a take-up roll 150 of spent donor sheet that is wound about a take-up core tubular body and houses a supply roll 152 of a supply length of donor sheet wound about a supply core tubular body. The lower portion 142 includes four (4) legs 144 that extend downwardly from the upper portion 140. The lower portion 142 serves to position the donor sheet 153 such that it is interposed between the thermal printhead 24 and the printing sheet 16. The legs 144 form a rectangular "box" of the donor sheet 153, and the thermal printhead 24 fits into the "box", as indicated by reference numeral 158, as the donor sheet cassette 32 is loaded onto the cassette receiving station 96. Thus the donor sheet cassette 32 of the present invention includes structure for

precisely guiding the donor sheet 153, as in contrast to much of the prior art, wherein the cassettes are non-precision structures, typically made of plastic, that simply roughly position the donor sheet for positioning by precision guiding apparatus fixedly mounted with the printer.

5

The upper portion 140 includes a handle 146 and a cover 148. The donor sheet supply roll 152 includes a supply length of the donor sheet 153 that is wound about a core tube (not shown). The cover 148 rotationally mounts torque transmission elements 154A and 154B, for transmitting torque from the take-up and supply shafts, 100 and 106, respectively, of the cassette receiving station 96 to the take-up and supply rolls, 150 and 152. The donor sheet cassette 32A includes a transfer apparatus for transferring the donor sheet 153 from the supply roll 152 to the take-up roll 150, such that it can be interposed between the thermal printhead 24 and the printing sheet 16. The donor sheet transfer apparatus includes a donor sheet take-up roll mounting shaft and a donor sheet supply roll mounting shaft, which mount the take up and supply rolls 150 and 152, respectively, and which are not visible in FIGURE 3. The donor sheet transfer apparatus also includes guide rollers 156, including those supported by the legs 144, for guiding the donor sheet 153 from the supply roll 152, to the take-up roll 150, such that the lower section 153A of the donor sheet 153 is interposed between the thermal printhead 24 and the printing sheet 16. When printing, and as the pivot actuator 74 presses the thermal printhead 24 against the printing sheet 16, as the printing drive motor 36 translates the thermal printhead 24 along the print (Y) axis, fresh sections 153 of the donor sheet 153 are drawn past the thermal printhead 24 from the supply roll 152, and the consumed donor sheet is wound on the take-up roll 150.

25

As described briefly above, the legs 144 of the lower section 142 of the donor sheet cassette 32A are spaced such that the thermal printhead 24 can fit therebetween for pressing the lower section 153A of the donor sheet 153 against the printing sheet 16. Reference numeral 158 indicates how the thermal printhead 26 extends between the legs 144 when the donor sheet cassette 32A is received by the donor sheet cassette receiving station 94, shown in FIGURE 2. Reference numeral 160 indicates how the spacing of the legs 144 also allows the cassette transport apparatus 112 to fit between

30

the legs such that the translatable engaging element 114 may engage a slot formed in a lower wall of the upper portion 140 of the donor sheet cassette 32A. The location of the slot is indicated generally by the reference numeral 162 in FIGURE 3.

5 Partially shown in FIGURE 3 are the following: the base structure 68 of the printhead carriage 30; the take-up drive motor 104; the magnetic brake 110 that is rotatably coupled to the supply shaft 106; the pivot actuator 74; the pivot actuator housing 84; the pivot actuator threaded nut 82; and the bias spring 92.

10 FIGURES 1-3 are discussed above to generally and schematically illustrate many of the salient features of the wide format printer of the present invention. Additional detail is provided in the FIGURES and discussion presented below.

FIGURES 4-5 illustrate additional views of the apparatus shown in FIGURES 1-3.
15 FIGURE 4A is a cutaway view of the upper portion of the wide format thermal printer 10, including a front elevational view of the printhead carriage 30.

With reference to FIGURE 4A, note that separate drive actuators 58A and 58B, respectively, independently drive the first and second ends of the translatable clamp
20 pair 42. Only the clamp 44 of the translatable clamp pair 42 is shown in FIGURE 4A, and the clamp 44 is cutaway to illustrate full detail of the printhead carriage 30. The work surface 14 is defined by a workbed 13, shown in cross-section in FIGURE 4A. The reference character "A" indicates a space between the cantilever arm 72 and the cassette receiving station 96. The pivot actuator 74 has pivoted the cantilever arm 72
25 downward such that it does not contact the cassette receiving station 96, and mechanical stops have limited the downward travel of the cassette receiving station. Also indicated in FIGURE 4A, by reference numeral 408, is the mounting axis, along which a trunnion pin is preferably disposed for coupling the thermal printhead 24 to the cantilever arm 72. The thermal printhead 24 is described in more detail below.

30

FIGURE 4B illustrates a side elevational view of the donor sheet handling apparatus 94 including the cassette receiving station 96 that is slidably mounted to the

base structure 68 of the printhead carriage 30. Shown are the take-up drive motor 104, the magnetic brake 110, as well as the translatable cassette engaging element 114. A boss 168 is formed at the base of the supply shaft 106.

5 FIGURE 5 is a top view of the wide format thermal printer 10 showing the work surface 14, the printhead carriage 30, the clamp 46, and the cassette storage rack 55, including four (4) cassette storage trays 134. Note that the work surface 14 can include suction apertures 176. Suction is selectively applied to the suction apertures 176 for securing the printing sheet 16 to the work surface 14 when printing on the printing sheet
10 16 and releasing the printing sheet 16 from the work surface 14 when translating the printing sheet 16 with the translatable clamp pair 42. The workbed 13 typically includes a platen 275, against which the thermal printhead 24 presses the donor sheet and printing sheet 16.

15 FIGURES 6A and 6B illustrate cross-sectional and end views, respectively, of the magnetic clamp 44, including the keeper 45. Screws 164 attach the ears 173 of the magnetic clamp 44 to the clamp pair fixtures 54A and 54B. The pins 166 guide the keeper 45 and pass through apertures 49 in the keeper 45. The clamp 44 is placed in the clamped condition by energizing the magnetic coils 172 disposed within the clamp
20 44 via the connector 174 to attract the keeper 45 so as to clamp the printing sheet 16 between the keeper 45 and a clamping surface of the clamp 44.

The present invention is deemed to include many additional features and aspects. These features and aspects are now described in turn. The order of
25 discussion is not intended to bear any relation to any relative significance to be ascribed to the features or aspects of the invention.

VACUUM WORKBED

30 The wide format thermal printer 10 of the present invention is intended to be used with a variety of widths of printing sheets 16. "Width", in this context, refers to the dimension of the printing sheet along the print (Y) axis. Narrow printing sheets may not

cover all of the suction apertures 176 in the worksurface 14 of the workbed 13, which are provided for securing the printing sheet 16 to the worksurface 14. To ensure that sufficient suction is applied to apertures blocked by the printing sheet 16 to secure the printing sheet 16 to the worksurface, it is often necessary to isolate many if not all of the unblocked apertures from the suction source 210. It is known in the art to arrange the apertures 176 in independent zones and for an operator to manually isolate, such as by turning valves or causing operation of solenoids, selected zones so as to not apply suction to those apertures not blocked by the printing sheet 16.

Furthermore, it is known for the operator, based upon observation of the width of the printing sheet 16, to manually inform the controller 22B of the width of the printing sheet 16, such as by data entry to the controller using a keypad. Knowledge of the width of the printing sheet 16 can be advantageous for a number of reasons. First, the array of thermal printing elements 26 is not to be energized when dry. That is, the array of thermal printing elements 26 of the thermal printhead 24 should not be energized when the thermal printhead 24 is not pressing donor sheet 153 against the printing sheet 16. Running the thermal printhead 24 "dry" risks ruining the typically expensive thermal printhead 24, as the thermal printing elements of the array 26 can overheat and change their printing characteristics. Accordingly, it is useful to know the width of the printing sheet 16 for imposing a limit on the travel of the thermal printhead 24 along the print (Y) axis.

According to the invention, there is provided a simple system for accommodating various widths of printing sheets 16 without the need for an operator of the wide format thermal printer 10 to observe which zones of apertures 176 are not blocked by the printing sheet 16 and to then manually operate valves so as to isolate those apertures from a suction source. The system of the invention can also automatically determine the width of the printing sheet 16.

FIGURE 7 illustrates a top view of the work surface 14 of the workbed 13. FIGURE 7 is drawn as if the workbed 13 is transparent such that the apparatus below the workbed 13 is readily visible. The clamps 44 and 46 are shown as cutaway and the

thermal printhead 24 is illustrated on the right-hand side of FIGURE 7 so as to indicate the location of the print swath 28 relative to the apertures 176.

The dotted lines indicate plenums formed in the workbed 13 below the worksurface 14 and in fluid communication with those apertures 176 surrounded by a particular dotted line. Reference numerals 186 and 188 indicate manifolds for applying suction to the apertures, and the circles within the dotted lines indicate fluid communication between a manifold and the plenum indicated by the dotted line. For example, the manifold 186 fluidly communicates with plenum indicated by the reference numeral 180, as indicated by the circle 184, and hence, taking note of the additional circles shown in FIGURE 7, fluidly communicates with the apertures indicated by the reference letters A and B. The manifolds 186 and 188 can be fabricated from suitable lengths and couplings of plastic pipe or tubing.

According to the invention, the apertures 176 are organized into zones, which can correspond to different widths of the printing sheet 16 disposed upon the worksurface 14 of the workbed 13. Reference numeral 194 indicates a dividing line between zone I and zone II; reference numeral 196 indicates a dividing line between zone II and zone III; reference number 198 indicates a dividing line between zone III and zone IV; and reference number 200 indicates a dividing line between zone IV and V. The apertures 176 included in each zone are further delineated by reference letters A-E. Zone I includes the plenums, and suction apertures in fluid communication therewith, indicated by reference letters A; Zone II is similarly indicated by reference letters B, and zones III, IV and V are indicated by reference letters C, D and E, respectively. FIGURE 7 is to be viewed in conjunction with FIGURE 8, and the circles 204 and 206 indicate fluid communication with the apparatus shown in FIGURE 8 for applying suction to the manifolds 186 and 188.

Shown in FIGURE 8 are the following: a suction source 210, manifold 212 that includes elbows, such as elbow 214, and tubing sections, such as tubing section 216; a vacuum sensor 220 for providing an electrical signal responsive to the degree of vacuum drawn by the suction source on the apertures; the muffler 222 that provides an

orifice for providing for a selected fluid leakage from the atmosphere to the suction source 210; and first and second flow control valves 224 and 226, respectively.

Reference numerals 204 and 206 indicate where the apparatus, shown in FIGURE 8, interconnects with the first and second manifolds 186 and 188, shown in FIGURE 7.

- 5 The controller 22B in FIGURE 8 receives signals produced by the vacuum sensor 220 and is in electrical communication with the flow control valves 224 and 226 for controlling thereof. The controller 22B, shown in FIGURE 8, can be the on-board controller 22A or an off-board controller.

- 10 With reference to FIGURE 7, the zones can be further organized into groups. In the embodiment shown in FIGURES 7 and 8, the first group includes zones I and II and includes the apertures 176 in fluid communication with the manifold 186. The second group includes zones III, IV and V, and the apertures in fluid communication with the manifold 188. The first vacuum manifold 186 provides fluid communication between the
15 suction source 210 and the first group of apertures (zones I and II), and the second manifold 188 provides fluid communication between the suction source 210 and the second group of apertures (zones III, IV and V).

- The first vacuum manifold 186 includes a first flow restriction element 190A
20 interposed between the suction source 210 and the apertures 176 of zone I, and a second fluid flow restriction element 190B interposed between the suction source and the apertures 176 of zone II. Similarly, the second vacuum manifold 188 can include fluid flow restriction elements 190C, 190D and 190E. The flow restriction element 190C is interposed between the suction source 210 and zone III, fluid flow restriction element
25 190D is interposed between the suction source and the apertures 176 of Zone IV, and fluid flow restriction element 190E is interposed between the fluid restriction element 190D and the apertures 176 of Zone V. The flow restriction elements 190 restrict the flow rates through the zones of apertures for providing selected differences in the degree of vacuum attained, and hence in the signals provided to the controller 22B by
30 the vacuum sensor 220, when the apertures 176 of the different zones are unblocked.

In a preferred embodiment, the apparatus of FIGURES 7 and 8 operates as follows: the controller 22B energizes the suction source 210. Initially, the flow control valve 224 and the flow control valve 226 are "closed" and the vacuum sensor 220 provides a signal indicative of a high degree of vacuum. Next, the controller 22B opens the flow control valve 224 to apply suction to the first group of apertures, that is the apertures 176 of zones I and II. If the printing sheet 16 is only wide enough to cover zone 1, leaving the apertures of zone II unblocked, the vacuum sensor 220 senses a difference in vacuum from that sensed when the switches were closed, the magnitude of the difference being responsive to the flow restriction element 190B. The difference in signal level indicates to the controller 22B that the apertures of one of the zones, typically zone II, are unblocked. If a difference in vacuum is sensed after the flow control valve 224 is opened, the controller typically does not proceed to open flow control valve 226, as the printing sheet extends from left to right in FIGURE 7 and the apertures in zones III, IV and V are unblocked. Note that the flow restriction element 190A can be included in the manifold 186 for limiting the flow when the apertures of both zones I and II are unblocked, or for facilitating detection of which of the zones is unblocked, creating a first level, or degree, of vacuum when zone I is unblocked and zone II is blocked and different degree of vacuum for indicating that zone I is blocked and zone II is unblocked.

Alternatively, if the printing sheet 16 placed upon the work surface 14 blocks the apertures of both zones I and II, there is little or no change in the level of vacuum attained by the suction source 210 and hence sensed by the vacuum sensor 220, except perhaps for a transient response as the manifold 186 is initially evacuated. Thus no change in the signal produced by the vacuum sensor 220 indicates to the controller 22B that all of the apertures 176 of zones I and II are blocked, and that the printing sheet 16 is at least wide enough to cover zones I and II.

The controller 22B next opens the flow control valve 226 to apply suction to the second group of apertures, that is the apertures 176 of zones III, IV and V. Should the level of vacuum also change very little compared to that attained when both flow control valves 224 and 226 were closed, the printing sheet 16 is determined to extend past all of the zones. If the printing sheet is wide enough to cover zones I and II, but not all of

zones III, IV and V, for example, if it is wide enough to only cover zones III and IV, upon opening flow control valve 226, the level of vacuum attained by the evacuation source and, hence, the signal responsive to that level of vacuum provided by the sensor 220 to the controller 22B, will be different than those levels and signals previously obtained.

- 5 How different depends on how many of zones III, IV and V are unblocked. The flow restriction elements 190C and 190D and 190E are interposed in the manifold 188 such that different vacuum levels will be attained by the evacuation source responsive to the number of zones containing unblocked apertures. For example, if the flow restriction elements were not included, uncovering any one of the zones may be sufficient to
- 10 significantly reduce the vacuum attained by the evacuation source 210 to the same nominal level. Restricting the flow through the zones of apertures ensures that the vacuum decreases as zones are unblocked in discrete steps and signals can be provided, by the vacuum sensor 220 to the controller 22B, that are responsive to the number of zones unblocked.

15

- The number of zones and groups described above are merely exemplary and the invention can be practiced with other numbers of zones and groups, as is understood by one of ordinary skill in the art, in the light of the disclosure herein. Typically, suction is successively applied to the groups of apertures until it is determined that one of the
- 20 groups includes unblocked apertures or until all of the groups have had suction applied thereto, that is, until no groups remain. The five (5) zones shown in FIGURE 7 correspond to the five (5) widths of printing sheets 16 that are commonly expected to be used with the wide format printer 10 of the invention. Grouping of the zones into first and second groups reduces the number of separate signal levels that are to be sorted by the
- 25 controller 22B for a given total number of zones. In practice, the flow restriction elements 190 can be realized by judicious choice of the hardware used to construct the manifolds 186 and 188. For example, it has been found that elbows typically used for interconnecting sections of tubing can be selected to function as the flow restriction elements 190. According to the invention, the flow restriction elements can be selected
- 30 for both ensuring separate signal levels for identifying the zones having unblocked apertures, and also for ensuring that those apertures within a group and which are

blocked provide adequate suction for securing the printing sheet to the workbed even when the other apertures of the group are unblocked.

However, as understood by one of ordinary skill in the art, apprised of the disclosure herein, the vacuum apparatus and method described above is not limited to use with printers, but can be of advantage in many other instances as well. For example, in the garment industry, sheet materials, such as layups of cloth, are often cut into selected shapes on a table that mounts a numerically controlled cutting implement. The sheet material is often secured to the table via the application of suction to apertures in the surface of the table, and knowledge of the width of the sheet material and constraining the travel of the cutter is also of importance, for reasons similar to those discussed above. This is but one example of an additional environment where the present invention can be useful. In general, the invention is deemed useful in many environments where a workbed includes a worksurface for supporting a sheet material on which work operations are to be performed, such as by translatable workhead mounting a pen, cutter or printhead or other work implement.

FIGURES 9A and 9B illustrate two embodiments of the invention. FIGURE 9A corresponds to the arrangement of hardware shown in FIGURES 7 and 8, whereas FIGURE 9B illustrates an alternative embodiment. Note that in FIGURE 9B the zones and groups are arranged more in "parallel" with respect to the suction source 210 than the arrangement depicted in FIGURE 9A.

Briefly returning to FIGURE 7, as is known in the art of thermal printing, the workbed 13 typically includes a platen for supporting the printing sheet material 16 as it is printed upon by the thermal printhead 24. For example, reference numeral 275 in FIGURE 7 indicates the area of the workbed 13 typically occupied by the platen, which can be a rectangular, hard, antistatic rubber material that is fitted to the workbed 13 so as to extend along the print (Y) axis. The upper surface 276 of the platen is typically substantially flush with the rest of the worksurface 14, and includes those vacuum apertures shown as within the area 275 of FIGURE 7.

DONOR SHEET ASSEMBLY

FIGURE 10A illustrates a donor sheet assembly 228 for loading into the donor sheet cassette 32. The donor sheet assembly 228 includes a length of donor sheet 229 wound about a supply core having a tubular body 230. The supply core 230 extends along a longitudinal axis 231 from a base end 233 to a drive end 234 and has a central opening 232 therethrough. Reference numeral 236 generally indicates drive elements and a memory element located substantially at the drive end of the supply core body 230. The drive elements and memory element are both described in more detail below.

The donor sheet assembly 228 can also include a take-up core having a tubular body 235 having a central opening 237 therethrough. As shown in FIGURE 10A, the take-up core body 235 can be packaged with the length of donor sheet 229 wound about the supply core body 230. FIGURE 10B illustrates a front view of the donor sheet assembly 228 of FIGURE 10A. Reference numeral 240 indicates that a free-end of the length of donor sheet 229 can be attached to the take-up core tubular body 235 for facilitating insertion of the assembly 228 into, and use of the assembly 228 with, the donor sheet cassette 32. The donor sheet assembly 228 can be wrapped in cellophane or some other appropriate packaging material to protect the length of donor sheet 229 and to hold the assembly 228 together. The take-up core body 235 also includes drive elements disposed at one end thereof, as indicated generally by the dotted lines 236A. Typically, the take-up core body 235 does not include a memory element disposed therewith.

FIGURES 11A through 11D illustrate additional details of the supply core body 230. As shown in FIGURE 11A, supply core tubular body includes drive elements 242 located within the central opening 232 and substantially at the drive end 234 of the supply core body 230, and that generally extend along and radially of the longitudinal axis 231. As shown in additional detail in FIGURE 11B, which is an enlarged view of the drive end 234 of the supply core body 230 shown in FIGURE 11A, the drive elements can include drive teeth 243 that extend from a base end 244 to a front end 245. The base end 244 is adjacent an annular support 246. Retaining elements 247,

which can be spring fingers integral with the supply core body 230, hold the memory element 300 in place against the annular support 246, inboard of the drive elements 242. The memory element 300 includes a data transfer face 302 facing the base end 233 of the supply core body 230 and a back face 303 facing the drive end 234 of the supply core body 230. The data transfer face 302 is substantially perpendicular to the longitudinal axis 231.

FIGURES 11C and 11D show end views of the supply core body 230 taken along section lines C-C and D-D, respectively of FIGURE 11A. Note that the drive elements 242 are recessed from the drive end 234 of the supply core body 230, as indicated by reference numeral 250 in FIGURE 11B. The take-up core body 235 also includes drive elements substantially similar to those shown with the supply core body 230.

FIGURES 12, 13A, 13B and 14 show additional details of the donor sheet cassette 32. FIGURE 12 is a front view of a donor sheet cassette 32 with the cover 148 removed. Shown are the upper portion 140 of the donor sheet cassette 32 and the lower portion 142. The take-up inner shaft 256 rotationally mounts a take-up shaft 255 for mounting the take-up core body 235 for having spent donor sheet wound thereon, as indicated by reference numeral 150 shown in FIGURE 3. The take-up shaft 255 fits through the central opening 232 of the take-up core 235. An inner supply shaft 257 rotationally mounts a supply shaft 258 for receiving the supply core body 230. FIGURE 3 as discussed above, illustrates how the donor sheet is threaded between the supply core body 230 and the take-up core body 235. The inner supply shaft 257 also mounts at the front thereof a data transfer element 304, described in more detail in FIGURE 14, for transferring data between the controller(s) 22 and the memory element 300 associated with the donor sheet. Note the slot 162A for receiving the translatable engaging element 114 that is mounted by the toothed drive belt 116 of the cassette transport apparatus 112. (See FIGURE 2). The donor sheet cassette 32 includes threaded holes 262 for receiving screws for holding the cover 148 to the donor sheet cassette 32, and guide holes 262A for receiving a guide pins 268, shown in FIGURE 13, of the cover 148.

FIGURES 13A and 13B show front and side views of the donor sheet cassette cover 148. The cover 148 includes bearings 274 that mount a take-up torque transmission element 154A and a supply torque transmission element 154B, each having male and female ends, 276 and 278, respectively. The supply torque transmission element 154B, which is substantially identical to the take-up roll torque transmission element 154A, is shown in cross-section. The male ends 276 includes an external drive element(s) 280 and the female ends 278 include internal drive elements 282. The torque transmission elements 154 couple the drive elements of core bodies 230 and 235 to the shaft drive elements 102 and 108 of the cassette receiving station 96. The cover also includes through holes 266 through which the mounting screws pass for securing the cover 148 to the donor sheet cassette 32. Also included are the guide pins 268 which are received by the apertures 262A, shown in FIGURE 12.

FIGURE 14 illustrates the donor sheet cassette cover 148 mounted to the donor sheet cassette 32. The supply shaft 258 is shown cut-away. The rear shaft bearings 290A and front shaft bearings 290B rotationally mount the supply shaft 258 to the inner supply shaft 257, and the take-up shaft 255 is similarly mounted to the take-up inner shaft 256. The core tubular bodies 230 and 235 and length of donor sheet wound thereon and therebetween are omitted from FIGURE 14 for simplicity; however, the memory element 300 is included and is shown mating with the data transfer element 304 of the supply shaft 258. Communication elements(not shown) at the back of the donor sheet cassette 32 communicate data to and from the memory element 300 via the data transfer element 304. The communication elements communicate with the storage trays 134 via conducting tabs located on the donor sheet cassette body for transferring data to and from the memory elements 300 and the controller(s) 22.

The methods and apparatus of the present invention are intended to increase the economy and efficiency of existing thermal printers, in part by reducing the amount of donor sheet required to print a given multicolor graphic product on the printing sheet 16. The refillable donor sheet cassette 32 receives the donor sheet assembly 228 that can include relatively long lengths of donor sheet wound about the supply core body 230. This helps to realize the economic benefit of obtaining the donor sheet in bulk, and for

allowing for the completion of more print jobs between reloading the donor sheet cassette. Typically, the donor sheet assembly 228 will include a length of donor sheet 229 that can be up to or greater than 500 meters. Use of a refillable donor sheet cassette 32 also avoids the cost or waste and recycling problems associated with the use of plastic disposable cassettes. When refilling the donor sheet cassette 32, the cover 148 is removed and the used supply and take-up core bodies removed, and a new donor sheet assembly 228 inserted into the cassette. Preferably, the spent donor sheet, now wound about the take-up core body 235, and the used supply core body 230 are recycled, and in particular, the used supply core body 230 can be returned for reading of data written on the memory element 300 by the wide format thermal printer 10. The used supply core body can have a fresh length of donor sheet 229 wound thereon and the new data written to the memory element 300. The reading and writing of data to and from the memory element 300 is now described in more detail.

Typically, the wide format printer 10 prints a color plane of the multicolor graphic product responsive to the data read from the memory element 300 mounted with the donor sheet assembly 228 to be used in printing that color plane. Many types of information can be stored on the memory element 300. Typically included is data characteristic of the donor sheet. For example, as there are a variety of colors of donor sheet, including spot and process colors, and as there are known to be at least sixty (60) different types of donor sheets, it is typically important that the wide format thermal printer 10 be aware of the color and type of donor sheet being used such that printing parameters, such as the energization of the thermal printing elements 26 or the pressure with which the thermal printhead 24 presses the donor sheet against the printing sheet 16, can be adjusted accordingly. The stored information, therefore, can include data representative of at least the color and type of the donor sheet, including, for example, information relating to the type of finish on the donor sheet, whether the donor sheet is resin based or wax based, and the class of the ink donor material on the donor sheet.

Other data characteristic of the donor sheet stored on the memory element 300 can include the average color spectra reading, such as the LAB value, for the length of donor sheet 229. Typically, a particular manufactured lot of donor sheet is tested to

determine this color spectra value, and all memory elements 300 included in donor sheet assemblies 228 that include a length 229 from that lot store substantially identical color spectra information. The color spectra reading is used in the printing process, either by the wide format thermal printer 10 or in preprocessing of data representative of the multicolor graphic image, to account appropriately for variations in the manufacturing processes that result in different color spectra values. For example, the RIP (raster image processing) computations can be varied in accordance with different color spectra data. Furthermore, the wide format thermal printer 10 can vary the voltage applied for energizing the array of thermal printing elements 26 responsive to variations in the value of the color spectra value read from the memory element 300.

The memory element 300 can also include data representative of information pertaining to the specific opacity/transparency value for the length of donor sheet 229 included in the donor sheet assembly 228. The wide format thermal printer 10 can use this information to adjust how the donor sheet is printed to maximize performance and color.

Data representative of the "firing deltas" to be used in energizing the array of thermal printing elements 26 to optimally print with a particular length of donor sheet 229 can also be stored on the memory element 300. The term "firing deltas" refers to variations in printing parameters for improving printing with a particular donor sheet. For example, the firing deltas can include data for varying the voltage and/or power applied to thermal printing elements, the time that the thermal printing elements are energized, and the pressure with which thermal printhead presses the donor sheet against the printing sheet.

Data representative of the length of the length of donor sheet 229 originally wound during the donor sheet assembly 228 can also be stored in the memory element 300. Typically, the length is stored in centimeters. This length is used to track the remaining length of unused donor sheet wound on the core tube 230. As the wide format thermal printer 10 prints a color plane, the donor sheet is interposed between the printhead and the printing sheet 16 and the thermal printhead 24 is translated along the

print axis, drawing the donor sheet past the printhead 24. From this process, the wide format printer can track the length of donor sheet drawn past the thermal printhead 24, and hence can determine the length remaining on the supply core body 230.

5 The memory element 300 can also include data representative of the supply side roll diameter, that is, the diameter of the length of donor sheet 229 originally wound on the supply core body 230. This diameter is not uniquely determined by the length of donor sheet 229. The diameter can vary significantly with the color of the donor sheet and other characteristics of the donor sheet. The diameter should be accurately tracked
10 and recorded when the length of donor sheet is wound on the core 230 and this information is used by the wide format thermal printer 10 to accurately estimate and control the tension applied to the donor sheet while printing, as described below.

 The memory element 300 can include a "read only" portion for storing data
15 representative of the manufacturer of the donor assembly 228 of the donor sheet. Such data can be stored on the memory element by the manufacturer of the memory element 300, and can be read by the wide format thermal printer 10 upon loading of the donor sheet assembly 228 into a donor sheet cassette 32 that is mounted on the cassette storage rack 55. An operator of the wide format thermal printer 10 can be informed
20 when a donor sheet assembly 228 that is not warranted or whose quality cannot be guaranteed is to be used on the wide format thermal printer 10.

 The memory element 300 can also store data representative of a lot code assigned to each manufacturing run of donor sheet produced by the manufacturer. This
25 lot code will allow any performance problems reported by customers to be tracked back to an original lot. If problems are being reported with the donor sheet of a particular lot, the remaining unused donor sheet of that lot may be removed from service to avoid future problems.

 The memory element 300 can also include information representative of a "born-
30 on date" of the length of donor sheet 229. This information is the actual date of the manufacture of the donor sheet assembly 228, that is, the date that the length of donor sheet 229 was wound onto the supply core body 230. This "born-on date" can be

significantly different than other dates of importance, such as, a "lot code" date typically included with the lot code information described above. For example, it can be beneficial to energize the thermal printing elements differently when printing with older donor sheet lengths 229, and whether the donor sheet has aged before or after being wound on the supply core body 230 can be of importance. The "born on" date can be checked to see if a selected shelf life of the donor foil assembly 228 has been exceeded.

FIGURE 15A illustrates one method for more economically providing donor sheet to the wide format thermal printer 10 and for reducing the cost of printing a given multicolor graphic product on the printing sheet 16. A donor sheet assembly 228 can be prepared from a master roll 344 that is sliced by cutters 348 into number of "slices" A, B, C, D, and E that are then wound onto the five individual core bodies 230A through 230E. The master roll 334 includes a length of donor sheet having a width (W), as indicated by reference numeral 346. The individual slices of donor sheet have a width 350 that is smaller than the width 346 of the master roll 344. In the example shown in FIGURE 15A, the width 350 is approximately one-fifth (1/5) of the width of the donor sheet 346 on the master roll 344. Although four (4) cutters 348 are shown in FIGURE 15A, typically two (2) additional cutters are positioned at the edges of the donor sheet and trim off a scrap width of the donor sheet material. The core bodies 230A-E are then incorporated into donor sheet assemblies 228. According to the invention, data representative of the "slice position" is stored on the memory element 300 to account for variations of properties across the width 346 of the donor sheet. For example, the stored information can indicate whether the length of donor sheet 229 is from slice position "A", "B", "C", "D" or "E". This information can also allow any problems reported with donor sheet assemblies 228 to be tracked to the manufacturing process and can allow better monitoring of that process for improvement thereof.

The above are examples of data characteristic of the donor sheet. One of ordinary skill in the art, in light of the disclosure herein, can envision other data characteristic of the donor sheet and that can be advantageously stored on the memory element 300. Additional examples are given below.

Other information that can be stored on the memory element 300 can include a revision code. The revision code will inform software running on the controller(s) 22 how many data fields are present in the memory element 300 and the format of the data fields. This revision code is updated each time a change is made to the amount or type of data that is being stored on memory elements 300 provided with donor sheet assemblies 228. Many revisions are likely be made over time and it is appropriate that the controller(s) 22 understands what data is actually on a particular memory element 300.

Data can be stored on the memory element 300 before or after mounting the memory element with the supply core body 230. When recycling previously used supply core tubular bodies, the memory elements 300 are likely not removed from the core bodies, and new data can be written to the memory element 300 by inserting a probe having a data transfer element into the central opening of the supply core body 230 at the base end 233 thereof such that the probe data transfer element contacts the data transfer face 302 of the memory element 300.

Typically, the data described above is stored on the memory element 300 between the time of manufacture of the donor sheet assembly 228 and the first use of the donor sheet assembly 228 with a wide format thermal printer 10. However, the invention also provides for the wide format thermal printer 10 to write to the memory element 300 before, during or after printing a multicolor graphic product.

As described above, the amount of donor sheet used when printing can be tracked by the wide format thermal printer 10 (i.e., by the controller(s) 22). Accordingly, after a particular color plane has been printed, or after it is determined that the wide format thermal printer is through printing with that particular donor sheet cassette 32, the wide format thermal printer 10 can write data representative of the amount of donor sheet remaining on the supply core body 230 to the memory element 300. The remaining length of information can be important for planning jobs so that the wide format thermal printer 10, before loading a particular donor sheet cassette to the cassette receiving station 96, can ensure that it will not run out of donor sheet while printing a print swath. Running out of donor sheet during printing a print swath usually

destroys the multicolor graphic product. Furthermore, the color fidelity of the donor sheet can vary from lot to lot, and it is a good idea for the wide format printer 10 to be able to predict when there is not enough donor sheet in the donor sheet cassette 32 to complete a particular print job. A warning can be provided to an operator of the wide format thermal printer 10, such as via a display associated with the controller 22. The remaining length information is also typically stored in centimeters. It is initially set by the manufacturer of the donor sheet assembly 228 to match the manufactured length information, and decremented by the wide format thermal printer 10 as donor sheet is consumed.

10

The wide format thermal printer 10 can also write other information to the memory element 300. This information can include, for example, the following: (1) the number of donor sheet-out/snaps. (This information is used to track the number of times that use of a particular donor sheet assembly results in an unexpected out-of-donor-sheet condition); (2) the number of times the donor sheet assembly 228 is used for printing. (Preferably, this information reflects the number of times donor sheet cassette 32 including the donor sheet assembly 228 is picked-up and used actively for printing during a job. If a donor sheet is not used, but is mounted in one of the several donor sheet cassette storage locations on the cassette storage rack 55, the information is not changed. Furthermore, the length used to-date, that is, the original length of donor sheet minus the length remaining, divided by the number of times used, yields information representative of the average size of the print jobs being printed by the wide format thermal printer 10); (3) the date of the first use of the donor sheet assembly 228 for printing; and (4) the date of last use. This latter date is updated each time the donor sheet assembly 228 is used for printing.

25

Data representative of information related to the usage of the wide format thermal printer 10 on which the donor sheet assembly 228 is mounted and of the usage of the donor sheet assembly 228 can also be written on the memory element 300. This information can include: (1) the number of different wide format thermal printers 10 on which the donor sheet assembly has been used; (2) the serial number of the wide format thermal printers 10 with which the donor sheet assembly 228 has been used; (3) the total number of hours on the printhead 24 that was last used to print with the donor

30

sheet assembly 228; (4) the total travel distance accumulated along the printing sheet translation (X) axis of the wide format thermal printer 10 used to print with the donor sheet assembly 228; (5) the total distance that a wide format thermal printer 10 has translated all printheads 24 installed in the wide format printer 10, as well as the total
5 distance that the particular thermal printhead 24 now installed has been translated; (6) the average steering correction used by the wide format thermal printer when translating the printing sheet 16 in one direction along the printing sheet translation axis; and (7) the average steering correction used when translating the printing sheet 16 in the opposite direction along the printing sheet translation (X) axis. Steering correction
10 refers to maintaining alignment of the printing sheet 16 relative to the worksurface 14 during printing of the multicolor graphic product, and is elaborated upon below.

Much of the data described above can be very useful in tracking the performance of the wide format thermal printers and donor sheet assemblies for diagnosis of
15 problems, for improving the printers and the donor sheet assemblies, for determining when warranty claims are valid, and for limiting the extent of any problems that should occur.

FIGURE 15B is a flow chart illustrating one sequence that can be followed in
20 reading of data from, and writing of data to, the memory element 300. In Block 351, data is read from the memory element 300 mounted with a supply core body 230 that is mounted within a donor sheet cassette 32 on the cassette storage rack 55. In block 352, selected printing parameters, such as the desired tension to be applied to the donor sheet, or the proper energization of the array of thermal printing elements 26, are
25 determined as a function of the data read from the memory element 300. Next, as indicated by block 353, the donor sheet cassette 32 is removed from the cassette storage rack 55 and mounted on the cassette receiving station 96, and as indicated by block 354, the color plane corresponding to the donor sheet in the donor sheet cassette is printed on the printing sheet 16. During printing, selected printing parameters, such
30 as the distance traveled along the print (Y) axis by the thermal printhead 24 while pressing donor sheet against the printing sheet material 16, are monitored. Proceeding to block 355, the donor sheet cassette 32 is returned to the cassette storage rack 55.

As indicated by block 356, the selected data on the memory element 300 is updated responsive to the monitored printing parameters. For example, the data field corresponding to the length of donor sheet remaining on the supply core body 230 can be updated (e.g., decremented) to account for the length of donor sheet consumed in block 354. The length of donor sheet consumed can be determined from the printing parameter monitored above, that is, from the distance traveled by the thermal printhead 24 while pressing the donor sheet against the printing sheet material. The steps shown in FIGURE 15B are typically all accomplished via the controller(s) 22, and are repeated for each of the color planes of the multicolor graphic product printed on the printing sheet 16 by the wide format thermal printer 10.

PRINTING SHEET ALIGNMENT AND TRACKING

With brief reference to FIGURE 1, note that the edge 19 of the printing sheet 16 is illustrated as substantially parallel to the printing sheet translation (x) axis. As understood by those of ordinary skill, such substantial parallelism is desirable so as to avoid "skew" errors in the multicolor graphic product, such as adjacent print swaths not aligning properly. FIGURES 16A-16C illustrate the edge 19 of the printing sheet 16 when skewed relative to the printing sheet translation (X) axis. The skewing is exaggerated for purposes of illustration. In FIGURE 16A, the edge 19 of the printing sheet 16 is disposed at an angle to the edge 15 of the work surface 14 such that along the dotted line 29B, representing the lower edge of a print swath 28, the edges 15 and 19 are separated by a distance d1. (For purposes of illustration the edge 15 is taken as parallel to the printing sheet translation (X) axis.) As shown in FIGURE 16B, as the printing sheet 16 is translated along the printing sheet translation axis (X) towards the top of the page on which FIGURE 16A is illustrated, the distance between the edge 19 of the printing sheet 16 and the edge 15 of the working surface 14 along the dotted line 29B has decreased to d2, whereas, along the dotted line 29A, indicating the other boundary of the printing swath 28, the distance between the edge 19 and the edge 15 is now d1.

Alternatively, FIGURE 16C illustrates the change in the distances between the edges 19 and 15 as the printing sheet 16 is translated starting from the position shown in FIGURE 16A in the opposite direction along the printing sheet translation axis (X), or towards the bottom of the page on which FIGURE 16A is shown. Along the dotted line 29B, the distance between the edges has now increased to d_3 and along the dotted line 29A, indicating the upper edge of the print swath 28, the distance between the edges 15 and 19 has increased to d_4 .

As illustrated by FIGURES 16A-C, when the printing sheet is skewed, the position of the edge 19 as measured along the print (Y), varies as the printing sheet is translated along the printing sheet translation (X) axis. One of ordinary skill is well aware of the problems such skew can cause with the printing of multicolor graphic product on the printing sheet 16. As the printing sheet 16 is driven along the printing sheet translation (X) axis, the error becomes cumulative in the print (Y) axis and produces an increasing lateral position error as the printing sheet 16 moves along the printing translation (X) direction. The error can quickly become large enough to cause printing off of the edge of the printing sheet 16. Accordingly, skew error is highly undesirable and can result in the multicolor graphic image being destroyed or in damage to the thermal printhead 24. In a wide-format thermal printer 10, which is intended to print large printing sheets, for example, 36" wide along the (Y) axis by 40' long in the (X) axis, skew error can be a problem of great concern.

According to the invention, the change in the print (Y) axis position of the edge of the printing sheet 16 as the printing sheet is translated back-and-forth along the printing sheet translation (X) axis can be used advantageously to correct the skew of the printing sheet 16.

FIGURES 17A and 17B show top and elevational views, respectively, of selected components of the wide format thermal printer 10. FIGURE 17A is a top view along the (Z) axis schematically illustrating the printhead carriage 30, the guiderails 40, the printing sheet 16 and the work surface 14; FIGURE 17B is an elevational view along the printing sheet translation (X) axis, and schematically illustrating the printhead carriage

30, the thermal printhead 24, the workbed 13, the work surface 14 and the printing sheet 16. With reference to FIGURES 17A and 17B, the printhead carriage 30 mounts an edge sensor 360 for detecting the location of the edge 19 of the printing sheet 16. As shown in FIGURE 17B, the edge sensor 360 transmits and receives a light beam 364
5 for detecting the edge 19 of the printing sheet 16. The edge sensor 360 includes a transmitting portion for generating light and a receiving portion for receiving reflected light. The change in the intensity of the reflected light received as the edge sensor passes over the edge 19 is used to determine the location of the edge 19. A reflective strip 362 is provided for enhancing the change in the intensity of the reflected light
10 received by the edge sensor 360 as it passes over the edge 19 of the printing sheet. The edge sensor 360 is shown as located along the lower edge of a print swath 29B. Again, this selection of location is exemplary. Note that rather than a reflection sensor, a linear array of receiving sensors, or pixels, can be located with the worksurface 14. The array would extend along the print (Y) axis, and the number of pixels illuminated indicate the
15 position of the edge 19 of the printing sheet 16.

The skew of the printing sheet 16 can be determined as follows. The printhead carriage 30 is moved back and forth along the print axis so as to detect the edge 19 of the printing sheet 16. Assume that the edge 19 is located as indicated by the distance
20 d_1 in FIGURE 16A. The printing sheet 16 is next translated along the printing sheet translation axis by the pair of translatable clamps 42 so as to, for example, move the printing sheet 16 to the position shown in FIGURE 16B. The printhead carriage 30 is again moved back and forth along the print axis to detect the edge 19 of the printing sheet 16, wherein the edge is located as indicated by the distance d_2 . Based on the
25 difference in relative positions of the printhead carriage 30 corresponding to the two detections of the edge 19, the relative change in distance, $d_1 - d_2$, can be determined, and from the knowledge of the distance the printing sheet 16 was translated along the printing sheet translation axis, the slope of the edge 19 can be determined, as shown in FIGURE 17C.

30 The skew can be varied (e.g., reduced) by independently actuating the clamp actuators 58A and 58B while placing at least one of the clamps of the clamp pair 42 in

the clamped condition and refraining from applying suction to the suction apertures 176. For example, with reference to FIGURE 18 showing a top view of the printing sheet 16 and the translatable clamp pair 42, placing the clamp 44 in the clamped condition and actuating the right clamp actuator 58B (not shown) more than the left clamp actuator 58A (not shown) translates the right clamp pair fixture 54B more than the left clamp pair fixture 54A and moves the edge 19 of the printing sheet 16 to the position indicated by reference numeral 19', skewing the printing sheet as shown. Basically, the clamp 44 differentially drives spaced portions of the printing sheet, such as portions indicated by reference numerals 365 and 367, for producing a torque on the printing sheet 16. Of course, as the clamp 44 clamps the printing sheet 16 along a substantial length, and the particular selection of the spaced portions shown in FIGURE 17 is exemplary. As used herein, differentially driving spaced portions includes driving spaced portions on the sheet material in different directions, driving the spaced portions different distances in the same direction, and fixing one portion and driving the other portion.

Typically, an iterative procedure is followed for varying the skew of the printing sheet 16. For example, the skew is determined as noted above, the clamp actuators independently actuated to vary the skew, the skew again measured, again varied, and so on, until the skew of the printing sheet 16 is within selected limits.

In general, independent actuation of the actuators 58A and 58B is used, not only to correct skew, but to "walk" the printing sheet 16 along the surface 14 of the workbed 13 so as to obtain a selected distance between the edge 19 of the printing sheet and the edge 15 of the work surface 14 or some other reference location along the print (Y) axis. Once this distance is within a predetermined range, the skew is varied as indicated above. Typically, if the edge 19 of the printing sheet 16 is within a tenth (10th) of an inch of the edge 15 of the work surface 14, it is not necessary to walk the printing sheet 16. "Walking" as used herein, refers to selectively activating the actuators 58A and 58B to first skew the printing sheet in one direction, and then to skew the printing sheet in the other direction, thereby "walking" the printing sheet 16. The term "aligning," as used herein, refers to moving the printing sheet to obtain a selected skew (including no skew)

and to obtain a selected distance between the edge 19 of the printing sheet and a reference location.

The location of the edge 19 relative to a reference position along the print (Y) axis can be determined with the aid of the home position sensor 366. The home position sensor indicates when the printhead carriage 30 is at a known position along the print (Y) axis, such as when the left edge of the printhead carriage 30 is aligned with the edge 15 of the work surface 14. As understood by one of ordinary skill, another home position could be suitably selected. Use of the home position sensor 366 allows more accurate determination of the location of the edge 19 relative to the edge 15 of the edge of the worksurface 14.

Note that the skew need not be totally eliminated, that is, it is acceptable to proceed with a selected residual skew during the printing of each color plane. However, the skew should not vary during printing. Preferably, the skew is periodically checked during the printing of each color plane of the multicolor graphic product on the printing sheet 16 and adjusted as necessary. For example, as the printhead carriage 30 translates back-and-forth along the print axis to print the print swaths, and the printing sheet is translated along the printing sheet translation axis between successive swaths, the edge sensor 360 can be used to continually monitor the skew and position of the edge 19. If it is determined that the skew is varying during actuation of the clamp pair to translate the printing sheet, the steering is corrected, that is the actuation of the actuators 58A and 58B is selectively adjusted so as to maintain the predetermined skew. The actuators 58A and 58B are preferably stepper motors, and the controller(s) 22 can independently vary the number of steps each is instructed to turn. However, other types of actuators are also suitable, such as servomotors that include position encoders.

Note that the controller 22 can control the edge detection sensor 360 so as to detect both edges of the printing sheet 16 for determining the width of the printing sheet 16. The controller 22 can determine the distance between the detected edges of the printing sheet 16 from the knowledge of the distance printing carriage 30 is translated.

The translatable clamp pair 42 is but one example of a drive apparatus for moving a strip or web of sheet material, i.e., the printing sheet 16, longitudinally back-and-forth along a feed path, in this instance, the printing sheet translation (X) axis of the wide format thermal printer 10.

Other known drive apparatus include friction, grit or grid drive systems. Drive systems find use not only in printers, but in plotting and in cutting devices. For example, in friction-drive systems, the friction (or grit) wheels are placed on one side (i.e., above) of the strip of sheet material and pinch-rollers (made of rubber or other flexible material) which are placed on the other side (i.e., below) of the strip of sheet material with spring pressure urging the pinch rollers and material toward the friction-wheels. During work operations, such as plotting, printing or cutting, the strip material is driven back-and-forth in the longitudinal or (X) direction by the friction-wheels while, at the same time a workhead including a pen, printing head or cutting blade is driven over the strip material in the lateral, or Y, direction. Friction-drive systems, in particular, have gained substantial favor with many types of printers due to their ability to accept plain (unperforated) strips of material of differing widths. Tractor-drive systems for use with perforated strips of material are known in the art, but require correct spacing of the track-drive wheels to match the spacing of the perforated strips.

One example of a friction drive system is disclosed in Patent Application Serial No. 09/217,667, entitled "METHODS FOR CALIBRATION AND AUTOMATIC ALIGNMENT AND FRICTION DRIVE APPARATUS", filed on December 21, 1998, and owned-in-common with the present application, and herein incorporated by reference. Disclosed in the above referenced application are friction drive wheels spaced in a direction parallel to the print (y) axis from each other, and which can be differentially actuated for differently driving spaced portions of the printing sheet for aligning the printing sheet 16. The use of friction, grit or grid drive apparatus for translating the printing sheet 16 along the printing sheet translation axis, and in particular of the apparatus and methods disclosed in the above reference application, are considered within the scope of the present invention.

Described above is a technique wherein the printhead carriage 30 mounts the edge sensor 360 which, in cooperation with the reflective strip 362, determines the skew of the printing sheet 16. However, also disclosed in the above-referenced application are methods and apparatus wherein a light source is disposed above a sensor that includes an array of pixels extending in the direction of the print (Y) axis. The sensor is disposed with the worksurface 14 for sensing the edge 19 of the printing sheet 16, and is spaced in the direction of the printing sheet translation (X) axis from the apparatus for driving the printing sheet (i.e., one of the translatable clamps or the friction drive wheels. Preferably, two sensors are used, one ahead and one behind the drive mechanism. The use of such sensors, as well as of other techniques and apparatus disclosed in the above reference application, are deemed within the scope of the present invention.

According to invention, reference indicia for providing a "ruler" can be provided on the printing sheet 16 and a sensor disposed for reading these indicia such that the controller(s) 22, responsive to sensor, can track the distance the printing sheet 16 is translated along the printing sheet translation (X) axis by the clamp pair 42 or the friction wheels. For example, the "ruler" can be printed on the back side of the printing sheet 16, that is the side facing the worksurface 14, and read by a sensor disposed with the worksurface 14, such the pixel array sensor discussed above.

FIELD REPLACEABLE THERMAL PRINthead ASSEMBLY

According to the invention, the thermal printhead 24 can be mounted to the cantilever arm 72 of the thermal printhead carriage 30 (See FIGURES 2,4 or 5) via the thermal printhead assembly 400 illustrated in FIGURE 19A. With reference to FIGURE 19A, the thermal printhead 24 can include a mounting block 402 for mounting the thermal printhead circuit board 403 to the printhead assembly base 404. A single coupling joint mounts the printhead assembly 400, and hence the thermal printhead 24, along the mounting axis 408, shown in FIGURE 4A, to the cantilever arm 72. Preferably, the coupling joint is a trunnion joint and the base 404 defines an aperture

410 for accommodating a trunnion pin (not shown) that extends along the mounting axis 408 (in the preferred embodiment the trunnion joint axis) that is received by the cantilever arm 72. Note that the mounting axis 408 is generally perpendicular to the direction along which the array of thermal printing elements 26 extends, and hence is generally perpendicular to the printing sheet translation (X) axis. The use of a single coupling joint advantageously provides for simple and easy removal and replacement of the thermal printhead 24 in the field, and can allow the printhead 24 to swivel for producing a more even pressure distribution on the thermal printing elements 26.

The thermal printhead assembly 400 can also include a heating element 412 and a cooling element 414 for transferring heat with the thermal printhead 24. The cooling element 414 can include cooling fins 133 that are mounted with the printhead assembly base 404. The cooling fins 133 are also shown in FIGURES 2 and 4A, and when the thermal printhead assembly 400 is mounted to the cantilever arm 72, the cooling fins 133 receive air directed to them by the blower 126 mounted with the cantilever arm 72. Preferably, the base 404 is thermally conductive for providing thermal communication between heating and cooling elements and the array of thermal printing elements 26.

The heating element 412 and the cooling element 414 are provided for enhanced thermal management of the thermal printhead 24 and, in particular, the array of thermal printing elements 26. Upon initial startup of the wide format thermal printer 10, the array of thermal printing elements can advantageously be warmed by the transfer of heat from the heating element 412 such that multicolor graphic image is printed properly on the printing sheet 16. However, during extended printing, it can be advantageous to remove heat from the array of thermal printing elements 26 and, accordingly, removal of such heat is enhanced by the cooling element 414. The heating element 412 is typically an electrical power resistor mounted for thermal communication with the printhead assembly base 404 and, hence, with the thermal printhead 24 and array of thermal printing elements 26.

The thermal printhead 24 receives signals via the thermal printhead connector 416 which include data representative of the multicolor graphic product to be printed on

the printing sheet 16. As is known in the art, thermal printhead 24 typically includes drive electronics for conditioning those signals prior to energizing the array of thermal printing elements 26 responsive to the signals. For example, the drive electronics can convert the signals received by the connector 416 from differential type signals to single-ended signals. The thermal printhead 24 also receives power from a power supply 828, as is known in the art, for energizing the array of thermal printing elements 26.

According to the invention, a semiconductor element 420 is included with the thermal printhead 24 for storing data characteristic of the thermal printhead 24. The printhead assembly base 404 mounts a semiconductor element mounting board 422 that, in-turn, mounts the semiconductor element 420. The connector 424 provides communication between the semiconductor element 420 and the controller(s) 22 associated with the wide format thermal printer 10. The arrangement shown in FIGURE 19A is exemplary, and as understood by one of ordinary skill, in light of the disclosure herein, the semiconductor element 420 can be mounted adjacent the array of thermal printing elements 26, such as on the thermal printhead circuit board 403 add/or be incorporated with the drive electronics. The term "printhead assembly," is employed herein to aid in the above discussion; however, as understood by one of ordinary skill in the art, the printhead assembly 400 need not include all of the elements described above.

The data characteristic of the printhead stored by the semiconductor element 420 can include data representative of the resistances of the thermal printing elements 26, such as an average resistance of the printhead elements. This resistance data can be useful in a variety of ways. For example, for proper printing of the multicolor graphic product on the printing sheet 16, the array of thermal printhead elements 26 is selectively energized. Typically, the thermal printhead elements are energized such that a selected amount of heat is generated in each element for transferring a pixel of color from the donor sheet to the printing sheet 16. Of course, the amount of heat generated depends, in-turn, on the current (or voltage) applied to the thermal printing element and the resistance of that element. Typically, it is more important that the manufacturer of the thermal printhead keep the individual resistances of the thermal

printing elements that makeup the array of thermal printing elements 26 within a rather narrow range of tolerances than the manufacturer provide a particular resistance. Thus the average value of the resistances of the thermal printing elements can vary, and the data stored in the semiconductor element 420 allows the wide format thermal printer 10 to automatically compensate for a thermal printhead 24 that has a higher or lower average resistance than another printhead 24. Accordingly, when the thermal printhead 24 is replaced in the field, a calibration procedure is not necessary or, if necessary, can be less difficult or time consuming and the wide format thermal printer 10 can more readily be returned to service.

10

Keeping the resistances of the individual thermal printing elements within narrow tolerances, for example, within one (1%) percent, typically adds to the cost and difficulty of manufacturing the thermal printhead 24, and can also lead to a thermal printhead 24 that is less robust than one manufactured with a wider range of tolerances. However, according to the invention, the data characteristic of the printhead can include the individual resistances of a selected plurality of the thermal printing elements. The selected plurality of the thermal printhead elements can included the individual resistances of each of the thermal printhead elements that is normally used in printing. The data representative of the resistances of the individual elements are stored in the semiconductor element 420 and each individual resistance is accounted for when energizing that element during printing. Accordingly, the manufacturer of the thermal printhead 24 need not take such extreme measures for producing a narrow range of tolerances, leading to a less-expensive thermal printhead and one that can be more robust in use.

25

According to the invention, the data stored on the semiconductor element 420 can include data representative of the history of use of the thermal printhead 24, or of the printer, and is typically acquired by monitoring selected printing parameters. For example, history data can include data representative of the following: the total time of use of the wide format thermal printer 10 with the thermal printhead 24 installed thereon; the total amount of time the thermal printhead has spent pressing donor sheet against printing sheet 16 and printing; the total distance translated along the print (Y) axis by the

30

thermal printhead 24 while pressing the donor sheet against printing sheet 16 and printing; the voltages that have applied to the thermal printing elements when energizing the thermal printing elements; and information related to the number of printing pulses (e.g. voltage pulses) that have been communicated to the thermal printing elements.

5

The semiconductor element 420 can include a processor programmed for tracking the number of printing pulses communicated to the thermal printing elements and for storing that number in the memory of the semiconductor element 420. As is known in the art, very often more than one pulse is sent to a thermal printing element to print a pixel with that element. Accordingly, the program can include tracking the total number of printing pulses communicated to all of the thermal printing elements or can track a number related to the total number to account for multi-pulse printing of each pixel. The total printing time accumulated on the printhead assembly 400 is related to the number of printing pulses transmitted to the thermal printing elements 26. From a knowledge of the number of printing pulses provided to the array of thermal printing elements 26 and the resolution of the multi-color graphic product, that is, the dots per inch, an approximate total time of use of the thermal printhead 24 can be determined, such as by the tracking program or by the controller(s) associated with the wide format thermal printer 10, and stored on the semiconductor element.

20

There are many different types of donor sheets and printing sheets 16 used in the graphic arts. These types of donor sheets and printing sheets 16 can produce varying amounts of wear on the thermal printhead 24. Accordingly, the types of printing sheets and donor sheets used with the thermal printhead 24 can be tracked and the history of use data described above can include data representative of the amount of time spent printing selected donor sheets and printing sheets. Typically, the controller(s) 22 read data characteristic of the donor sheet from the memory element 300 mounted with the supply roll of the donor sheet.

25

30

The data described above can be useful in a number of ways, such as diagnosing problems with the quality of the multicolor graphic product, determining if customer claims are within a warranty, tracking use for timely performing service and

maintenance. For example, data can be read from the semiconductor element 420 when testing a particular thermal printhead 24 in the field. The thermal printhead assembly 400 can be removed from the printer and the resistance profile, that is the average resistance or the resistance of individual thermal printing elements of the thermal printhead 24, read from the semiconductor element 420. The stored profile will typically correspond to the resistances of the thermal printing elements 26 at the time of manufacture of the thermal printhead 24, and can be compared to actual empirical tests performed on the thermal printhead 24 when removed from the wide format thermal printer 10. A determination that some or all of the thermal printing elements have changed their resistance can be an indication of over-stressing, that is, over-heating, of the thermal printhead. The thermal printhead can be replaced, or the controller(s) 22 associated with the wide format thermal printer 10 instructed to print the color plane of the multicolor graphic product so as to compensate for changed thermal printing elements.

The thermal printing elements 26 of the thermal printhead 24 selectively heat the donor sheet to transfer pixels of donor material, such as an ink, from the donor sheet to the printing sheet 16. Typically, each thermal printing element corresponds to a single pixel. Depending on the nature of the multicolor graphic product to be printed, a particular thermal printing element can be energized repeatedly within a relatively short period of time, or can be energized infrequently. Furthermore, a particular thermal printing element can be surrounded by neighboring thermal elements that are relatively hot or cold, depending on the recent usage of those elements. As is known in the art, the amount of heat transferred to the donor sheet by a particular thermal printing element thus can vary as a function of the past energization of that thermal printing element and its neighbors. Print quality can be affected if the amount of energy transferred when printing similar pixels is allowed to excessively vary from pixel to pixel. Accordingly there are known in the various "hysteresis control" techniques for accounting for the past energization of a thermal printing element and its neighbors when energizing that element for printing. FIGURE 19B is a view of the thermal printhead assembly 400 taken along the line 19B-19B of FIGURE 19A. Note that the thermal printing elements 430, which are located near the ends of the array of

thermal printing elements 26, have fewer neighbors than those elements 432 nearer the middle of the array of thermal printing elements 26. According to the invention, the array of thermal printing elements 26 can include thermal elements 26A and 26B that are not normally used in printing. That is, print swaths, such as print swath 28, are
5 printed by the thermal printing elements normally used in printing, which are those elements of the array between the dotted lines defining the print swath 28. According to the invention, selected thermal printing elements not normally used in printing are energized so as to provide additional heated neighbors for the outer thermal elements 430 to reduce any printing discrepancies between the outer thermal printing elements
10 430 and those thermal printing elements 432 nearer the middle of the array of thermal printing elements 26. The thermal printing elements 26 that are heated can be energized prior to and/or during the energization of the outer thermal printing elements 430.

15 In addition, it is also understood by those of ordinary skill, in light of the disclosure herein, that proper alignment of consecutive print swaths can be important to avoid or limit the visibility of "seams" running along the print (Y) axis and indicating where individual print swaths meet. Such seams can be more or less visible depending on the nature of the multicolor graphic product being printed. The translatable clamp
20 pair 42 of the present invention can provide accurate and repeatable translation of the printing sheet 16 for limiting misalignment of the print swaths. The disclosed apparatus and methods for alignment of the printing sheet 16 along the printing sheet translation (X) axis also can contribute to reducing any misalignment of the printing swaths. For example, one technique for reducing the visibility of seams can include printing the
25 multicolor graphic product such that print swaths used in printing one color plane are not in registration with those of another color plane. Thus any seams in the first color plane do not have the same position along the printing sheet translation (X) axis as seams in the other color plane. Another technique that may be of use is to print swaths with other than "straight" bounding edges. For example, the print swath 28 shown in FIGURE 1 is
30 bounded by the straight edges 29A and 29B. The array of thermal printing elements 26 can be energized such that bounding edges of the print swath assume a meandering

shape, such as a sawtooth or sinusoid. Successive print swaths thus have edges that meet in the manner of the pieces of a jigsaw puzzle.

According to another technique practiced in accordance with the invention, the distribution of pressure along the array of thermal printing elements is modified. For example, with reference to FIGURE 19B, consider that thermal printhead 24 is about to print the print swath 28, having just printed print swath 28' and deposited a slightly raised area of ink 435 on the printing sheet material 16. The thermal printing elements 26A, though not normally used for printing, contact the raised area of ink 435, and the contact and/or pressure between the array of thermal printing elements 26 and the printing sheet material 16 is not uniform along the length of the array of thermal printing elements 26. Accordingly, shims 437 can be placed between the mounting block 402 of the thermal printhead 24 as shown in FIGURES 19A and 19B. Typically, these shims are approximately 1 thousandths of an inch thick. The use of such shims has been found to improve the quality of the printed multicolor graphic product.

DONOR SHEET CONSERVATION

The present invention includes many features intended to provide for economical and efficient printing of the multicolor graphic product on the printing sheet 16. It is known in the art that the donor sheet is typically expensive. Accordingly, the donor sheet assembly 228 includes a length of donor sheet 229 that can be, for example, 500 meters long, such that an operator of the wide format thermal printer can realize the economic benefits of buying in bulk.

25

Furthermore, the memory element 300 includes data representative of the length of unused donor sheet remaining on the supply core body 230. Accordingly, before a particular job is started, the controller(s) 22 associated with the wide format thermal printer 10 can determine whether enough donor sheet remains on the supply core body 230 to completely print a particular color plane. Unexpectedly running out of the donor sheet during printing is a problem not unknown with prior art printers and typically destroys the multicolor graphic product, wasting the donor sheet that had been already

used in printing the color planes of the multicolor graphic product. This problem can be avoided with techniques and apparatus of the present invention.

According to the invention additional methods and apparatus are provided for conserving donor sheet while printing and for reducing the amount time required to print a particular multicolor graphic product on the printing sheet 16. The apparatus and method involve programming running on the controller(s) 22 associated with the wide format thermal printer 10. Techniques referred to herein as X axis conservation, Y axis conservation, knockout conservation, and time conservation, are now described.

FIGURE 20 illustrates the technique of Y axis conservation. Consider printing the text "MAXX", as indicated by reference numeral 450. The individual letters are indicated by reference numerals 452A through 452D. Assume for simplicity that the height of the text "MAXX" is such that it may be printed in one print swath 28. The thermal printhead 24 prints the text 450 by pressing the donor sheet 153 against the printing sheet 16 and selectively energizing the array of thermal printing elements 26 while translating the thermal printhead 24 along the print (Y) axis. Translation of the thermal printhead 24 while pressing the donor sheet 153 against the printing sheet, causes the donor sheet to be drawn past the thermal printhead 24. Reference numerals 454 indicate translation along the print (Y) axis with the thermal printhead down for printing the individual letters 452A through 452D of the text 450. According to the invention, the thermal printhead 24 is lifted in between printing objects, such as the individual letters 452A through 452D, when the objects are separated by at least a selected distance in the direction of the print (Y) axis, so as to not draw the donor sheet 153 past the thermal printhead 24 when there are not any pixels to be printed. Reference numerals 456 indicate translation along the (Y) axis while the thermal printhead is lifted away from the printing sheet 16. The pivot actuator 74 lifts the thermal printhead 24 by moving the cantilever arm 72 upward, upon instruction from the controller(s) 22 associated with the wide format thermal printer 10.

FIGURES 21A and 21B illustrate the use of the technique referred to as (X) axis conservation. With reference to FIGURE 21A, consider the printing of the exclamation

mark 474 having a top portion 474A and a lower portion 474B. The printing sheet 16 is translated in the direction indicated by reference numeral 470. According to one technique for printing the multicolor graphic image, each of the color planes is divided into a number of print swaths, each having a swath width substantially equal to the printing width of the array of thermal printing elements 26 along the printing sheet translation (X) axis, and the printing sheet 16 is translated a distance equal to the swath width after printing each of the print swaths. Such a technique can result in the exclamation mark 474 being printed as illustrated in FIGURE 21A, that is, in the three (3) print swaths 28A, 28B and 28C. When printing the exclamation point 474, the printhead is only down for a distance along the (Y) axis, indicated by the reference numeral 476. However, note that the shaded areas, indicated by reference numerals 478A, are portions of the donor sheet that are drawn past the thermal printhead 24, but are not used for printing. The portions 478A are simply wasted. Some waste, of course, is unavoidable. However, by translating the printing sheet 16 a selected distance 480 along the printing sheet translation axis, it is possible to print the exclamation mark 474 in fewer print swaths.

For example, as shown in FIGURE 21B, the exclamation mark 474 may be printed in two (2) print swaths 28C and 28D, such that the wasted portions of the donor sheet, indicated by reference numerals 478B, is less than the wasted portions indicated by reference numerals 478A. Typically, (X) axis conservation involves translating the printing sheet 16 a selected amount, which can be other than an integer number of swath widths, so as to print a given portion of the color plane with a reduced number of print swaths.

The invention also includes methods and apparatus for practicing the technique referred to above as "knock-out" conservation. Consider the two (2) yellow banners, indicated by reference numeral 500 as shown in FIGURE 22A, and also consider the text "MAXX", indicated by reference numeral 450 and shown in FIGURE 22B. A graphic designer may desire that the text 450 be laid-over the yellow banners 500 such that the text, if for example, printed in black, knocks out the yellow banners where the text overlays the yellow banners 500. For example, with reference to FIGURE 22C, the

letter "A", indicated by reference numeral 452B, knocks out a portion of the left yellow banner 502A, as does the letter "M", indicated by reference numeral 452A. These two (2) knocked out portions are shown in FIGURE 22D, and indicated by reference numerals 506 and 508, respectively. Because the wide format printer 10 prints in separate color planes, unless properly instructed, the printer 10 simply prints all of the yellow banners 502A and 502B when printing the yellow color plane and then proceeds to print the yellow with the black text "MAXX" when printing the black color plane. However, according to the invention, the knocked out areas of the yellow banners, such as those areas indicated by reference numerals 506 and 508 in FIGURE 22D, are determined and the printer 10 refrains from printing knocked out areas such as 508 and 506, thus conserving the yellow donor sheet.

The invention also includes method and apparatus for reducing the time required to print the multicolor graphic product on the printing sheet 16. For example, with reference to FIGURE 23, consider that the exclamation mark 474 is the final object printed in a first color plane and that it is printed in two (2) print swaths 28C and 28D. Consider also that the next color plane to be printed is a green color plane that consists of the five (5) rectangular blocks 512A through 512E. The thermal printhead 24 finishes printing the first color plane with the printing of the print swath 28.

The green color plane can be considered to have a near end, indicated by reference numeral 518, and a far end, indicated by reference numeral 516. The wide format thermal printer 10 can print the green color plane by translating the printing sheet 16, as indicated by reference numerals 520 and 522 such that objects nearer the far end 516 are printed first, or, alternatively, can translate the printing sheet 16 as indicated by reference numeral 524 and 526, such that objects nearer the near end 518 are printed first. As can be appreciated by viewing FIGURE 23, the total distance the printing sheet 16 is translated is less when printing the color plane by printing objects nearer the near end 518 first than when printing the objects nearer the far end 516 first. Translating the printing sheet 16 a shorter distance reduces the time to print the multicolor graphic product. Because the wide format thermal printer of the present invention can print in either direction along the printing sheet translation (X) axis, one

printing technique can be simply alternating printing directions as successive color planes are printed. However, as shown in FIGURE 23, it can be more efficient to evaluate the position of the printing head when finishing a first color plane relative to the objects of the next color plane to be printed and translating the printing sheet such that the objects nearer the near end of the next color plane are printed before the objects nearer the far end of the next color plane. This can involve printing successive color planes in the same direction. Note that printing a single color plane can involve printing while translating in both direction along the printing sheet translation (X) axis.

Before the multicolored graphic product is printed on the printing sheet 16, machine readable data files representative of the graphic product are created. Typically, a graphic artist working at a computer workstation provides input using a keyboard and a pointing and selecting device, such as a mouse or light pen, to generate an image representative of the multicolor graphic product on the screen of the workstation. The workstation stores one or more data files representative of the multicolor graphic image in a memory associated with the workstation. The graphic artist incorporates bitmap images, text, and geometric shapes, as well as other objects, into the final multicolor graphic product, and can enter these objects into workstation in any order. The file created by the workstation representative of the multicolor graphic image is referred to herein as "plot file," or alternatively as a "job file." According to the invention the plot file is processed to separate out individual color plane data and to place the data representative of the multicolor graphic image in a form suitable for instructing the wide format thermal printer 10 to print the multicolor graphic product using the donor sheet and time conservation techniques illustrates in FIGURES 20-23.

Accordingly, the above techniques illustrated in FIGURES 20 - 23 are implemented via appropriate software, hardware, or firmware associated with the controller(s) 22 of the present invention, and typically involve processing of the data representative of the multicolor graphic product, such as the job file. Presented below is a preferred embodiment of processing techniques, in the form of flow charts, for achieving X axis conservation, Y axis conservation, knock out conservation and printing time conservation, as illustrated in FIGURES 20-23 above. One of ordinary skill, in light

of the disclosure herein, can program the controller(s) 22 associated with wide format thermal printer 10 and/or provide the appropriate firmware or hardware so as to functionally achieve the above conservation techniques.

5 FIGURES 24-26 are flow charts illustrating processing data representative of the multicolor graphic product such that the wide format thermal printer 10 of the present invention prints the multicolor graphic product according to the conservation techniques illustrated in FIGURES 20-23.

10 FIGURES 27A-27I are intended to be considered in conjunction with the discussion of FIGURES 24-26. Each of the FIGURES 27A-27I includes a coordinate axes indicating the printing sheet translation (X) and print (Y) directions. With reference to FIGURE 27A, consider that the multicolor graphic product 550 to be printed on the printing sheet 16 consists of the word "TEXT" printed twice. The letters represented by
15 the reference numerals 552A through 552F are to be printed in one color, and that the letters "X" and "T", represented by reference numerals 554A and 554B, respectively, are to be printed in a second color. Each of the letters in 552 and 554 is an object in a plot file created by the graphic artist, who may enter the objects into the plot file in any order. For simplicity, all the objects shown in FIGURE 27A are textual characters, which are
20 typically geometric shapes.

 The data processing steps indicated in the flow charts in FIGURES 24-26 are performed for each color plane. Typically, the order of printing color planes is predetermined by the nature of the multicolor graphic product. Typical multicolor
25 graphic products printed by the wide format thermal printer 10 of the invention can include process colors, such as the subtractive "CMYK" process colors and additionally, spot colors specific to a particular job and that are typically not rendered faithfully by a combination of the process colors and, hence, are printed by using a donor sheet of the desired spot color. It is known in the art that the CMYK process colors are preferably
30 printed in a selected order. Accordingly, the multicolor graphic product can include deliberate overprints.

Reference numerals 558A through 558E in FIGURE 24A indicate data processing steps wherein the job file is read to sort out those objects that are of the same color as the color plane to be printed. For each object found that is of the color plane to be printed, a bounding rectangle is created about that object, as indicated by reference numeral 558D. For example, assume that the color plane to be printed corresponds to the color of the objects 552A-F in FIGURE 27A. The routine indicated by reference numeral 558 in FIGURE 24A results in the creation of the bounding rectangles 562A through 562F shown in FIGURE 27B. Note that the objects 554A and 554B do not receive bounding rectangles because they are not of the color to be printed in this color plane. Typically objects are shapes and bitmaps. A bitmap receives its own bounding rectangle.

After the job file has been read through to sort those objects of the color of the color plane to be printed and the bounding rectangles drawn around each object, the bounding rectangles are sorted left-to-right along the printing sheet translation (X) axis, as indicated by functional block 564. For example, each bounding rectangle 562A-F shown in FIGURE 27B can be considered to have an X and Y coordinate associated therewith, such as the X and Y coordinate corresponding to the lower left-hand corner of each bounding rectangle. According to functional block 564, the bounding rectangles are sorted such that those with the lower X coordinate are arranged in a list before those with higher X coordinates. Next, as indicated by functional block 566, print slices are created from bounding rectangles. The term "print slice" as used herein, simply refers to a rectangular area of the color plane. Initially there is a 1 to 1 correspondence between print slice and bounding rectangles; that is, each print slice simply becomes a bounding rectangle.

Proceeding to functional block 568, print slices that are within a selected distance of each other along the X axis are combined. FIGURE 24B is a block diagram schematically illustrating a preferred technique for combining print slices. As indicated by functional block 570A, a "slices changed" variable is defined and set as "TRUE." In decision block 570B, the slices changed variable is evaluated. If the "slices changed" is true, the "yes" branch is followed to functional block 570C where the "slices changed"

variable is set to "FALSE," and proceeding to functional block 570D, the current slice is selected to be the first slice from the list of slices created by functional blocks 564 and 566. Next, decision block 570E checks to see whether slices remain in the list to be processed, and returns to decision block 570B if the list includes more slices to

5 consider, as is discussed below. Proceeding to decision block 570F, neighboring slices are compared to see if they are within a selected distance of each other along the X axis. If the slices are close, that is, they are separated by less than the selected distance, they are combined to form a new slice. For example, in FIGURE 27B, the rectangular boxes 562A and 562B are now each slices. As they are very close, actually
10 overlapping, they are combined into the new combined slice 580 in FIGURE 27C.

Proceeding with functional blocks 570H and 570I in FIGURE 24B, the number of slices is decremented and the "slices changed" variable is set to "TRUE." Returning to decision block 570E, the above procedure is repeated, and FIGURE 27D illustrates the
15 result of proceeding through the blocks 570E through 570I again. The new combined slice 580 has been compared to the next nearest slice, which is the former rectangle 562C. Accordingly, these two are combined, as shown in FIGURE 27D, to form the new slice 582 which will, in turn, be combined with the former rectangular box 562D to form the combined slice 584, shown in FIGURE 27E. Note that the combined print slice
20 technique shown in the block diagram 570 will continue until, in going through the entire list of slices, no slices are changed. For example, whenever any slice is changed, the "slices changed" variable is set to "TRUE" and after following the "no" branch from decision block 570E to decision block 570B, the procedure of blocks 570E through 570I is again followed. This process continues until, in going through the whole list of slices,
25 no slices are changed, at which point, the "combine slices" routine 570 is exited, as indicated by reference number 570K.

With reference again to FIGURE 24A, proceeding from functional block 568 to functional block 572, the width of each slice, where "width" in this context refers to its
30 dimension along the X axis, is "grown", or increased, to be an integer number of printing, or swath, widths. The increase in X dimension is toward the middle of the color plane. For example, with reference to FIGURE 27F, the right-hand boundary 585 of the

slice 584 is extended to 586 such that the width 588 of the slice along the X axis corresponds to an integral number of print-head widths. The printing width is typically about 4 inches.

5 Returning to FIGURE 24A, after increasing the width of each slice as necessary to be an integer number of printing widths, the combine print slices procedure 570 of FIGURE 24B is again performed, as indicated by functional block 576. For example, the new slice 584 having the boundary indicated by reference numeral 586 in FIGURE 27F, is now much closer to the rectangular box 562E, now considered a slice, in
10 FIGURE 27F. Accordingly, as shown in FIGURE 27G, on proceeding again through the combined print slice flow chart 570, a new slice 586, as indicated in FIGURE 27G, is generated. The combined print slice flow chart is followed again until reaching the "done" block 570K.

15 The block diagram shown in FIGURE 24A results in the color plane of the color to be printed being organized into a selected number of print slices where a print slice, as noted above, is a rectangular area of the color plane. With reference now to FIGURES 25A and 25B, reference numeral 556 refers to the generation of the print slices described above in FIGURES 24A and 24B.

20 Proceeding to functional block 594 of FIGURE 25A the direction of motion of the printing sheet along the printing sheet translation axis during printing of the color plane is determined. This direction is determined, as indicated by FIGURE 23. That is, the left to right list created at functional block 564 is examined and compared to the known
25 present position of the thermal printhead 24 to determine the nearer end of the color plane. The direction of translation of the printing sheet 16 is selected such that the color plane is printed from its nearer end to its farther end. Depending as on the direction selected, as indicated by reference numerals 596 to 600, either the last print slice or the first print slice is taken as the current print slice.

30

Decision block 602 causes an exit to the "done" state, indicated in decision block 604, if there remain no print slices to process in the color plane. Next, as indicated by

functional block 606, the printing sheet 16 is translated such that the thermal printhead 24 is positioned at the beginning of the current print slice location. Proceeding to functional block 608, the print slice is subdivided into print swaths of width equal to the printing width, described above, of the thermal printhead 24. See FIGURE 27H, wherein the print slice 586 is now divided into print swaths 28A, 28B and 28C and the rectangular box 562F, now a print slice, is divided into a print swath 28D. Proceeding to functional block 610, the first print swath is set as the current print swath. As indicated by reference numeral 612, indicating the circled "A", the remainder of processing is described in FIGURE 25B.

With reference to FIGURE 25B, decision block 614 checks to ensure that print swaths remain to be processed. If the answer is "NO", reference numerals 616 referring to the circled "C" in FIGURES 25A and 25B, indicate proceeding back to decision block 602 of FIGURE 25A to print other print slices. As described above, if there are no other print slices, decision block 602 leads to "done," as indicated by block 604, and printing of the color plane is complete.

However, as of yet, the printing of a print swath is not described. Returning to FIGURE 25B, as indicated by block 618, a memory region that is equal to the length and width of the print swath is set aside in a memory associated with the controllers. This is a one-to-one mapping, that is, the memory region includes one memory location for each pixel that can be printed within the print swath. Next, as indicated by functional block 620, the print job, that is, the file created by the graphic artist, is examined again. Each object in the print job file is examined to determine if it is of the color to be printed in the color plane and whether it falls within the current print swath. Initially, as indicated by functional block 620, the first object in the print job file becomes the current object. Decision block 622 checks to make sure there are still objects to process. Proceeding to decision block 624, if the object is the same color as the color plane about to be printed and it falls within the current print swath, the object is "played" into the memory region, that is, binary "ONES" are inserted in the memory regions at those locations corresponding to the pixels wherein the color should be printed on the printing sheet 16.

Assume that it is determined at decision block 624 that the current object is not of the color plane to be printed. Following the "NO" branch from decision block 624, decision block 630 checks to see if the current object is an deliberate overprint, that is, the object is to be deliberately printed over to achieve a particular effect. If it is an overprint, as indicated by the "YES" branch of decision block 630, decision block 628 makes the next object the current object. However, if the current object is not a deliberate overprint, then the current object is of a color that prints over the color of the color plane being printed, and a "hole" is knocked-out for the object in the memory region, that is any "ONES" in a locations corresponding to current object are changed to "ZEROS." This corresponds to the "knock-out" conservation shown in FIGURE 22D. After all objects in the print job file are processed, the "NO" branch of decision block 622 is followed, leading to the circled "B", as indicated by reference numeral 640.

With reference to FIGURE 25C, further processing is now described. As indicated by decision block 642, a check is made to determine whether the memory region created by functional block 618 is empty. If the memory region is empty, there are no objects to be printed in the current print swath. For example, all of the objects printed in the swath may have been knocked-out. If the memory region is empty, following the "YES" branch of decision block 642 leads to functional block 744, wherein the printing sheet 16 is translated past the print swath 28A, and as indicated by reference numeral 612 and the circled "A", the next print swath is printed, as indicated by reference numeral 612 in FIGURE 25B.

Alternatively, if the memory region is determined in decision block 642 not to be empty, functional block 646 performs Y axis conservation for the current print swath, corresponding to lifting the printhead as illustrated in FIGURE 20. A print swath consists of consecutive rows of pixels, where the rows extend along the printing sheet translation (X) axis, each pixel corresponding to one thermal printing element of the array of thermal printing elements 26. Basically, each row of pixels within the print swath is examined to see if all the pixels that row are blank, and to determine when there exists consecutive blank rows. The number of consecutive blank row is counted, and, should more than a threshold number of consecutive blank rows be found, the print swath is

divided into sub-swaths, where the thermal printhead 24 is lifted between subswaths. This procedure is described in detail below.

FIGURE 26 is a flow chart illustrating the Y axis donor sheet conservation procedure and is considered in conjunction with FIGURE 27I. Consider print swath 28A, shown in FIGURE 27I. Starting with functional block 647 in FIGURE 26, the variable "looking for a blank row" is set at "TRUE." Then, in functional block 648, the number of blank rows are set equal to "ZERO." Proceeding to functional block 650, the current row is set as the first row of the swath 28A. The first row of pixels is indicated by reference numeral 651 in FIGURE 27I, with the individual pixels indicated by reference numerals 657. For simplicity, the individual pixels 657 are shown as much larger than they typically are in practice. (Typically, a print swath is four (4) inches wide, and there are 1200 pixels across the width of the swath, for a resolution of 300 dpi.)

Returning again to the flow chart of FIGURE 26, the decision block 660 checks to see whether there are more rows in the swath 28A to process. At this point, the variable "looking for a blank row" is "TRUE," having been set by the functional block 647 and not otherwise reset. Accordingly, proceeding along the "YES" branch to decision block 666, each pixel of the current row is examined to determine whether the row 651 is blank. Accordingly, proceeding along the "YES" branch from decision block 666 to functional block 668, the number of blank rows is incremented. Proceeding to decision block 670, the number of blank rows is compared to the threshold value, and assume for the purposes of this example that this threshold value is six (6) blank rows.

The six blank rows 651 to 656 are counted by repeating the blocks 660, 664, 666, 668, 670, and 672. As the number of blank rows does not exceed six (6), the "NO" branch leading from decision block 670 is followed, which leads to functional block 672, setting the next row as the current row, leading again to a decision block 660, 664, etc. This procedure continues through the decision and functions blocks indicated until all the six rows 651 -656 shown in slice 28A of FIGURE 27I are counted. Finally, when processing the seventh (7th) row, indicated by reference numeral 674 in FIGURE 27I, decision block 666 determines that the row is not blank, and proceeding along the "NO"

branch to functional block 680, resets the number of blank rows. The next row is made the current row according to functional block 672 and the process described above repeats.

5 Consider the examination of rows 680-688 in FIGURE 27I. In this instance, it is determined by the program represented by the flow chart of FIGURE 26 that the threshold number of blank rows is exceeded. Accordingly, when examining the row 687 in FIGURE 27I (a seventh row), it is determined in decision block 670 that the number of blank rows is greater than the threshold value (6) and, proceeding along the "YES" branch to functional block 671, a sub-swath is created such that after printing the "T" 552A in swath 28A, the thermal printhead 24 is lifted. Proceeding now to functional block 692, the variable "looking for a blank row" is set at "FALSE," and the next row is made the current row by functional block 672. Basically, at this point, the counting of blank rows continues to determine when the thermal printhead 24 is to be dropped again. As the variable "looking for a blank row" is "FALSE," when reaching decision block 664 the "NO" branch is followed, leading to decision block 694 which checks to determine whether the current row is blank. If the current row is blank, functional block 672 sets the next row as the current row. Eventually, however, after examining row 696, the next row is found to contain pixels to be printed. The "NO" branch leading from decision block 694 is followed and, as indicated in functional block 700, the number of blank rows is set to "ZERO." Proceeding to functional block 702, the variable "looking for blank rows" is set at "TRUE" and the procedure illustrated above repeats until all the rows of the swath have been examined. For the example of print swath 28A, two (2) sub-swaths 690 and 710 are created, as shown in FIGURE 27J.

25 Referring back to FIGURE 25C, after performing the print (Y) axis donor sheet conservation of functional block 646, the first sub-swath is taken as the current swath, as indicated by functional block 712. Proceeding to decision block 714, a check is made to determine whether there are more sub-swaths to process. Proceeding to functional block 716, the thermal printhead 24 is moved along the print (Y) axis to the beginning of the sub-swath position corresponding to the position indicated by reference numeral 718 in FIGURE 27J.

Proceeding to functional block 720, the sub-swath 690 of FIGURE 27J is now printed by translating the thermal printhead 24 along the print (Y) axis. The thermal printhead 24 is lifted at the end of the print swath indicated by reference numeral 722.

5 As indicated by FIGURE 25C and the loop return path 724, the next sub-swath 710 is printed. Next the "NO" branch of decision block 714 is followed, leading to functional block 744 wherein the printing sheet 16 is moved along the printing sheet translation (X) axis past print swath 28A to the next print swath 28B. As indicated by reference numeral 612, indicating the circled "A", returning to the top of FIGURE 25B the
10 remaining print swaths are processed and the procedure outlined above repeats for each print swath in the color plane. The flow charts of FIGURES 24-26 are repeated for each color plane of the multicolor graphic product, for example so as to print the objects 554A and 554B. FIGURE 27J illustrates how the procedure as detailed in the above flow charts can divide the print swaths 28B, 28C and 28D into individual sub-swaths 750
15 to 754, 756 and 758.

TENSION CONTROL

Proper control of the tension applied to the donor sheet section 153A (see
20 FIGURE 12) during printing can help ensure that a high quality multicolor graphic product is printed on the printing sheet 16. As understood by one of ordinary skill in the art, the tension to be applied to the donor sheet section 153A typically varies as a function of the characteristics of the particular type of donor sheet being used to print. According to the invention, data characteristic of the donor sheet can be read from the
25 memory element 300 mounted by the supply core body 230 prior to loading the donor sheet cassette 32 on the cassette receiving station 96, and the desired tension determined by the controller(s) 22 as a function of the read data. Alternatively, the desired tension can be assumed to be a constant, i.e., the same for all donor sheets. This assumption is often justified.

30 The desired tension is applied to the donor sheet by selectively energizing the take-up motor 104 and the magnetic brake 110. As is also known in the art, the radius

of the length of donor sheet 229 wound on the supply core body 230 (i.e., the radius of the supply roll of donor sheet) and the radius of any donor sheet wound about the take-up core body 235 (i.e., the radius of the take-up roll) need to be determined and taken into account to determine the proper energization of the take-up motor 104 and the magnetic brake 110.

It is known in the art to determine the overall radius of a known length of donor sheet wound on the supply core body 230 from a knowledge of the radius of the core body and the thickness of the donor sheet. See for example U.S. Patent No. 5,333,960 issued August 2, 1994, and herein incorporated by reference. According to the invention, however, the thickness of the donor sheet need not be known to determine the overall radius of a remaining length of donor sheet wound on a core body.

In the present invention, the controller(s) 22 can track the length of donor sheet used, i.e., the length transferred past the thermal printhead 24, by tracking the distance translated by the thermal printhead 24 along the print (Y) axis with the thermal printhead 24 pressing the donor sheet against the printing sheet 16. The length of donor sheet remaining on the supply roll is determined as the original length wound on the supply core body minus the length used as tracked above. The length of donor sheet wound on the take-up core body is equal to the length tracked above, or the original length wound on the supply core body 230 minus the length remaining on the supply core body 230.

According to the invention, the radius of the supply roll of the donor sheet can be determined responsive to data read from the memory element 300. For example, the controller(s) 22 can approximate the current radius of the supply roll from data representative of the following: 1) the remaining length of the donor sheet on the supply core body; 2) a known length of donor sheet wound on the supply core body 230; 3) the radius of the supply roll when the known length is wound on the supply core body 230; and 4) the radius of the core tubular body. Typically, items 1) - 3) are read from the memory element, and item 4) is fixed and stored by a memory associated with the controller. Item 1), the remaining length, is written to the memory element 300 when the donor sheet cassette 32 is returned to the cassette storage rack 55 after printing a color

plane or a portion thereof. The known length and known radii typically are the original length of donor sheet wound on the supply core body 230, and the radius corresponding to the original length, and these are written to the memory element 300 at the time of manufacture of the supply roll. The radius r_c of the core supply core body 230 and the
 5 radius R of the supply roll of donor sheet are shown in FIGURE 15A.

According to the invention, the radius of the supply roll can be determined from the equations I and II below, or directly from equation III, which is obtained by combining equations I and II. The terms used in the equations are defined below.

10

L_f = a known length of donor sheet wound on the core body

R_f = the known radius of the length L_f of donor sheet wound on the core body

r_c = the radius of the core body

l_c = the length of the donor sheet that when wound into a roll would have the radius r_c

L = a second known length of donor sheet wound about the core body

R = the radius of the length L of donor sheet wound on the core body, unknown and to be determined

Equation I
$$\frac{L_f + l_c}{l_c} = \frac{R_f^2}{r_c^2}$$

Equation II
$$\frac{L + l_c}{L_f + l_c} = \frac{R^2}{R_f^2}$$

Equation III
$$R = \sqrt{r_c^2 \left(1 - \frac{L}{L_f} \right) + \frac{L}{L_f} R_f^2}$$

Once the radius of the supply roll is determined, the brake 110 is energized by providing the energization E to the take-up motor according to Equation IV, where:

- E = the energization provided to the take - up motor (or brake) to provide desired tension
 E_{thresh} = the threshold energization that must be provided to the take - up motor to overcome friction (or to the brake to initiate braking)
 E_c = the energization of the motor (or brake) needed to provide a known tension for a known radius (the "known" radius used is r_c)
 T_d = desired tension to be applied to donor sheet (such as determined from data read from the memory element)
 T_k = tension applied to the donor sheet at energization E_c and known radius r_c

Equation IV
$$E = (E_c - E_{\text{thresh}}) \frac{R}{r_c} \frac{T_d}{T_k} + E_{\text{thresh}}$$

The tension T_k , which is the tension applied to the donor sheet when a known energization E_c is applied to the brake 110 and the supply roll has the known radius r_c , can be determined empirically, such as by using a spring gauge, taking into account the typical translation speed (e.g., 2 inches/minute) of the printhead carriage 30 when printing along the print (Y) axis. This data is typically stored in a memory associated with the controller 22.

The above equations are also used for the energization of the take-up motor 104. Note that the thermal printhead 24, when pressing the donor sheet against the printing sheet 16, largely isolates the brake 110 from the take-up motor 104, such that the tension in the donor sheet between the thermal printhead 24 and the supply roll is affected largely by the brake rather than the take-up motor, and the tension on the donor sheet between the thermal printhead 24 and the take-up roll is affected mostly by the energization of the take-up motor 104, rather than by the brake.

The threshold energization of the take-up motor 104 and the brake 110 can be determined as follows: After mounting a new donor sheet cassette 32 onto cassette receiving station 96, the take-up motor 104 is be rotated in the reverse direction to create some slack in the donor sheet. Next, take-up motor is increasingly energized for

forward rotation until the take-up motor just begins to rotate. The take-up motor threshold energization level corresponds to the energization at which this onset of rotation is noted.

5 A threshold energization for the brake can be determined in a similar manner. For example, after generating the slack in the donor sheet and determining E as noted above, the take-up motor 104 is further rotated to remove the slack previously introduced, and the energization of the take-up motor is further increased such that rotational sensor or encoder again indicates the onset of rotation of take-up roll. The
10 brake is now increasingly energized until the rotation ceases, and this energization level corresponds to the threshold energization when using the equations above to determine the energization of the brake to provide the desired tension. Typically, the threshold energization do not vary significantly from donor sheet cassette to donor sheet cassette.

15 FIGURE 28 is a flowchart illustrating the steps followed to energize the brake 110 (or the take-up motor 104) to provide a selected tension on the donor sheet. As indicated by block 770, the original length of donor sheet wound on the supply core body 230, the original radius of the of the length of donor sheet wound on the supply core body, and the length of donor sheet remaining on the supply core body 230 are
20 read form the memory element 300. Proceeding to block 772, the radius corresponding to the length of donor sheet wound on the supply core is determined as a function of the data read from the memory element and the radius of the core tube, which is typically fixed and stored in a memory associated with the controller 22. Proceeding to block 774, the desired tension is determined. If necessary, additional data can be read from
25 the memory element, and, for example, look up tables consulted to determine the desired tension corresponding to the donor sheet. As indicated in block 778, the donor sheet cassette containing the donor sheet wound on the core body is loaded onto the cassette receiving station 96. The energization to be applied to the take-up motor and the brake are each determined in accordance with Equation IV presented above.
30 Proceeding to block 780, the energization is applied to the brake to provide the desired tension.

The donor sheet can spool onto the take-up core differently than the unused donor sheet spools on the supply core body 230, due to the ink material transferred from the donor sheet to the printing sheet 16 during printing, among other factors. However, as with energizing the brake 110, a known radius corresponding to a known length of donor sheet wound on the take-up core body suffices to determine the proper energization of the take-up motor 104, and both are typically determined empirically. A rotation sensor, such as the encoder indicated by reference numeral 875 in FIGURE 4B, is typically coupled to the take-up motor 104, and is included in the present invention to determine when the donor sheet has broken. (The encoder will indicate an excessive number of rotations per unit time.) According to another technique that can be practiced in accordance with the invention, the change in the radius of the take-up roll can be tracked by noting the length of donor sheet used, as described above, as well as the number rotations of the take-up roll, as determined by a rotation sensor or encoder 875.

Preferably, the invention includes the magnetic brake 110 coupled to the supply roll for tensioning the donor sheet between the supply roll and the thermal printhead 24. However, as is known in the art, a mechanical brake can also be used. For example, a spring-biased arm mounting a friction pad can be disposed such that the friction pad rests against the supply roll, such as against the outer layer of donor sheet wound on the supply roll.

FIGURES 29A AND 29B schematically illustrate one example of the on-board controller 22A and the interfacing of the on board controller 22A with other components of the wide format printer 10. The on board controller 22A can include an IBM compatible pc 800 in communication with the Digital Signal Processor (DSP) 802, which handles much of the standard, lower level functionality of the wide format printer 10. The IBM compatible pc can include the Pentium MMX processor 801, and the typical other standard hardware, such as the mouse keyboard and video interfaces 804; the printer port 806; the hard drive 808; the CD ROM drive 810; the floppy disk drive 812; and the random access memory (RAM) 814. Also included are the following: the serial port 816 in communication with the data transfer element(s) 304 for communication with memory elements 300 mounted in donor sheet apparatus 228 received by donor sheet

cassettes 32 on the cassette storage rack 55; the second serial port in communication with the user interface 61; and the communication interface 822 for communicating with other controller(s) 22.

5 The DSP 802 communicates with the printhead power supply 828 that provides the electrical power for energizing the thermal printing elements of the thermal printhead 24. As is known by ordinary skill in the art, considerable power can be required to properly energize the thermal printing elements, and the printhead power supply often includes a large storage capacitor(s) for enhancing power deliver to the thermal printing
10 elements. The storage capacitor or capacitors can be located proximate to thermal printhead 24, rather than with the printhead power supply 828, for reducing the effects of the inductance of the power leads running from the printhead power supply 828 to the thermal printhead 24. The DSP also communicates with the semiconductor element 420 mounted with the thermal printhead 24, communicates print data representative of
15 the multicolor graphic product to the thermal printhead 24 for selectively energizing the thermal printing elements, and communicate with the rotary sensor or encoder 830 coupled to the take-up shaft 100 for sensing rotation thereof.

 The wide format thermal printer 10 can also include the driver board 834 and the
20 five (5) motor drivers 840 for driving those motors or actuators of the wide format thermal printer 10 that preferably are stepper motors. For example, as indicated by FIGURES 29A AND 29B, the printing drive motor 36, left and right clamp actuators 58A and 58B, respectively, the pivot actuator 74, and the belt drive motor 120 are preferably stepper motors and can be driven by the driver board 834 in combination with the motor
25 driver boards 840.

 As understood by those of ordinary skill in the art, the wide format thermal printer of the present invention can include various sensors, detectors, interlocks, etc., that are known to be useful for safe and efficient use of the wide format thermal printer and that
30 are often employed on printers or plotters known in the art. Sensors are often included with stepper and other motors to indicate "home" and "end" positions of the motors or the apparatus driven by the motors. The driver board 834 communicates with such

sensors and interlocks. As indicated by reference numerals 845 and 847, the driver board 834 can also communicate with the home position sensor 366 described in conjunction with aligning and tracking the printing sheet 16, the edge sensor 360 and the hanging loop optical sensor 66. As indicated by reference numeral 850, the driver
5 board 834 also drives the clamps 44 and 46 between the clamped and unclamped conditions, as well the dc motors or actuators of the wide format thermal printer 10, such as the take-up motor 104 and the brake 110, and the squeegee 62 actuators. The vacuum sensor 220 and flow control valves 224 and 226 can also be driven by the driver board 834.

We Claim:

1. An assembly providing a supply of donor sheet for use in a printing operation and for replaceable use with a donor sheet cassette, said assembly comprising:

5 a core having a tubular body, which body extends along a longitudinal axis between a base end and a drive end, and which body also has a central opening extending along the longitudinal axis between said base end and said drive end;

a selected length of donor sheet wound about said core body;

10 said core body also having a plurality of drive elements, which drive elements extend along and radially of the longitudinal axis, and are located within said central opening substantially at the drive end of said core body; and

15 a memory element mounted within said central opening of said core body and substantially at said drive end of said core body and inboard of said drive elements, said memory element having a data transfer face substantially perpendicular to said longitudinal axis and facing said base end of said core body and a back face facing said drive end of said core body.

2. The assembly of claim 1 including a take-up core having a tubular body, which body extends along a longitudinal axis between a base end and a drive end, and which body also has a central opening extending along the longitudinal axis between said base end and said drive end of said core body,

5 said core also having a plurality of drive elements, which drive elements extend along and radially of the longitudinal axis, and are located within said central opening substantially at the drive end of said core body and are substantially identical to said drive elements of said supply core body, and wherein the free end of said length of donor sheet is coupled to said take-up core body.

10

3. The assembly of claim 2 wherein said length of donor sheet terminates in length of leader material, said length of leader material secured to said take up core body and wherein a portion of a length leader material is wound about said supply core body such that longitudinal axes of said core bodies substantially parallel.
4. The assembly of claim 3 wherein said core bodies each have a longitudinal length from said base end to said drive end of approximately 4.75 inches.
5. The assembly of claim 1 wherein said core body has a longitudinal length from said base end to said drive end of approximately 4.75 inches.
6. The assembly of claim 1 wherein said memory element includes a read and write memory portion and a read only memory portion.
7. The assembly of claim 6 wherein said read only memory portion includes data representative of a vendor associated with said length of donor sheet.
8. The assembly of claim 1 wherein said memory element stores data representative of the spectral characteristics of said length of donor sheet.
9. The assembly of claim 1 wherein said memory element stores data representative of the length of said length of donor sheet.
10. The assembly of claim 1 wherein said memory element stores data representative of the slice position of said length of donor sheet.

11. The assembly of claim 1 wherein said memory element stores data representative of a lot code and date of manufacture of said length of donor sheet.
12. The assembly of claim 1 wherein said memory element includes data representative of color and type of said length of donor sheet.
13. The assembly of claim 1 wherein said memory element includes data representative of the opacity of said length of donor sheet wound on said core body.
14. The assembly of claim 1 wherein said memory element includes data representative of the date said length of donor sheet was wound onto said core body.
15. The assembly of claim 1 wherein said memory element includes data representative of the overall diameter of said length of donor sheet and said core body.
16. The assembly of claim 1 wherein said drive elements are recessed from said drive end of said core body.
17. The assembly of claim 1 wherein said plurality of drive elements includes a plurality of longitudinally and radially extending drive teeth, said teeth extending longitudinally from a base end nearer said base end of said core body to a front end nearer said drive end of said core body, said front end said teeth recessed a selected distance from said drive end of said core body.
18. The assembly of claim 17 wherein said back face of said memory element is located adjacent said drive teeth bases.
19. The assembly of claim 17 wherein said core body includes an annular support ring adjacent the base ends of said drive teeth for engaging a lip adjacent said back face of said memory element, said core body including at least one retaining member for pressing said lip against said support ring, said memory element located with said annular support ring such that said data transfer face of said memory element is nearer said base end of said core body than said base ends of said drive teeth.

20. The assembly of claim 19 wherein said retaining member includes a spring arm depending from the inner wall defining the inner diameter of said core body.

21. An assembly for providing a supply of donor sheet for use with a wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes, said assembly for replaceable insertion in a refillable donor sheet cassette, the cassette for replaceably mounting on a cassette receiving station mounted with a thermal printhead of the thermal printer, the cassette receiving station adapted for receiving the cassette such that a section of donor sheet is positioned under the thermal printhead and interposed between the printhead and the printing sheet when printing, said assembly comprising:

10 a core having a tubular body, which body extends along a longitudinal axis between a base end and a drive end, and which body also has a central opening extending along the longitudinal axis between said base end and said drive end;

a selected length of donor sheet wound about said core body;

15 said core body also having a plurality of drive elements, which drive elements extend along and radially of the longitudinal axis, and are located within said central opening substantially at the drive end of said core body; and

20 a memory element mounted within said central opening of said core body and substantially at said drive end of said core body and inboard of said drive elements, said memory element having a data transfer face substantially perpendicular to said longitudinal axis and facing said base end of said core body and a back face facing said drive end of said core body.

25

22. A method of providing a replaceable donor sheet assembly for insertion in a refillable cassette and for use with a thermal printer for providing a donor sheet for thermal printing, comprising the steps of:

5 providing a length of donor sheet;

providing a core having a tubular body extending along a longitudinal axis between a base end and a drive end and having a central opening extending therethrough between said base and drive ends, the core including a plurality of drive
10 elements, which drive elements extend along and radially of the longitudinal axis and are located within said central opening substantially at the drive end of said core body and a memory element mounted within said central opening of said core body and substantially at the drive end of said core body and inboard of said drive elements, said
15 memory element having a data transfer face substantially perpendicular to said longitudinal axis and facing said base end of said core body and a back face facing said drive end of said core body;

winding the selected length of the donor sheet about the core body;

20 determining selected data characteristic of the donor sheet; and

writing the selected data to said memory element.

23. The method of claim 22 wherein the step of writing the selected data includes inserting a probe having a data transfer element into the central opening of the tubular body at the base end thereof such that the probe data transfer element contacts the data transfer face of the memory element.

24. A method of manufacturing a replaceable assembly for providing a supply of donor sheet and for insertion in a refillable cassette, comprising the steps of:

providing a length of donor sheet having a first width W ;

cutting the length of donor sheet along its length into N separate slice lengths of donor sheet each having a width approximately equal to W divided by N ;

providing N supply core bodies;

winding the N slice lengths of donor sheet onto the N core bodies to provide N wound supply core bodies of donor sheet;

providing N memory elements each having data transfer and back faces, each of the memory elements mounted within a different supply core body substantially at a first end thereof and having the data transfer face facing inwardly toward the second end of the core body;

testing the donor sheet to determine data characteristic of the donor sheet;

storing on said memory elements the data characteristic of the sheet material;

providing N take-up core bodies; and

affixing free ends of each of the slice lengths wound on the supply core bodies to a different take-up core body to form N donor sheet assemblies.

25. The method of claim 24 wherein the step of providing a length of donor sheet having a width W includes providing a length of donor sheet having a width W greater than or equal to 24 inches and wherein the step of cutting the donor sheet along its length into N slice lengths each having a width approximately equal to W/N includes
5 cutting the length of donor sheet into 5 slice lengths each having a width approximately equal to 4.75 inches.

26. The method of claim 24 including the step of storing data on a selected memory element representative of the slice position of the slice length of donor sheet wound on the supply core body mounting that memory element.

27. The method of claim 24 wherein the step of testing includes testing each of the slice lengths individually and wherein the step of storing includes storing on a selected memory element the data obtained from the testing of that slice length wound on the supply core body with which the selected memory element is mounted.

28. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic product, comprising:

5 a workbed including a platen, said workbed having a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface, and each extending across the workbed in the direction of the print axis from a first end to second end, the clamps for translating the printing sheet in the direction of the printing sheet translation axis, the first ends being mechanically coupled to one another and the
15 second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis;

at least one actuator coupled to the clamp pair for translating the clamp pair in the direction of the printing sheet translation axis between first and second positions;

20 a thermal printhead having an array of thermal printing elements extending parallel to the printing sheet translation axis;

donor sheet means including a supply shaft for rotationally engaging a supply
25 roll of the donor sheet, a take-up shaft for rotationally engaging a take-up roll for winding thereon donor sheet that has been drawn from the supply roll and interposed between the thermal printhead and the printing sheet, and a take-up motor rotationally coupled to the take-up shaft, said shafts and rolls mounted with said thermal printhead for translation parallel to the print axis therewith;

30 said thermal printhead being translatable parallel to the print axis for printing on the printing sheet in print swaths extending parallel to the print axis in an area between the clamps by pressing the donor sheet against the printing sheet and selectively energizing the thermal printing elements; and

35 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet.

29. The wide format thermal printer of claim 28 wherein said workbed includes suction apertures and wherein said means for securing and releasing the printing sheet includes a suction source for selectively applying suction to the suction apertures.

30. The wide format thermal printer of claim 28 wherein said at least one actuator includes first and second independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair.

31. The wide format thermal printer of claim 28 including a semiconductor memory element mounted with said thermal printhead and storing data representative of the resistances of the thermal printing elements, and wherein said thermal printing elements are energized for printing responsive to said stored data.

32. The wide format thermal printer of claim 28 wherein said thermal printhead removably and replaceably mounts to the printer via a single trunnion joint.

33. The wide format thermal printer of claim 28 including a motor for rotating a spool of the printing sheet, and a hanging loop sensor for sensing a hanging loop of printing sheet between the workbed and the spool of printing sheet, wherein the motor is responsive to the hanging loop sensor for rotating the motor for maintaining the hanging
5 loop.

34. The wide format thermal printer of claim 28 wherein said printer includes a printhead carriage mounting the thermal printhead for translating the thermal printhead parallel to the print axis, said printhead carriage including:

5 a base structure mounted with the printer for translation parallel to the print axis and for mounting the thermal printhead;

a cantilever arm pivotably mounted at a first end to said base structure for pivoting about an axis generally transverse to said print axis, said cantilever arm
10 mounting said thermal printhead;

a pivot actuator coupled to said base and to the other end of said cantilever arm for selectively pivoting said cantilever arm about the pivot axis; and

15 wherein said base structure mounts said donor sheet means.

35. The wide format thermal printer of claim 34 wherein said donor sheet means includes:

5 a cassette receiving station mounted with said base structure for receiving a cassette mounting donor sheet supply and take up rolls, said cassette receiving station adapted for receiving the cassette such that a section of donor sheet between the supply and take-up rolls is positioned under the thermal printhead for being interposed between the thermal printhead and the printing sheet when printing, said receiving station including a supply and take-up drive elements for engaging drive elements
10 mounted with the cassette for rotationally coupling to supply and take up rolls, said printhead carriage including a take-up motor rotationally coupled to said take-up drive elements and a brake for braking said supply roll.

36. The wide format thermal printer of claim 35 including a donor cassette storage rack extending parallel to the print axis for mounting a plurality of donor sheet cassettes in a row;

5 said cassette receiving station including a cassette transport means extending from said cassette receiving station toward the cassette storage rack and including a translatable engaging element for engaging a donor sheet cassette for transporting the donor sheet cassette between said cassette receiving station and said storage rack; and

10 wherein said base structure slidably mounts said receiving station, said station being above said cantilever arm such that the cantilever arm can be upwardly pivoted for engaging and vertically displacing the receiving station and engaging element for engaging a cassette mounted on the cassette storage rack.

37. The wide format thermal printer of claim 36 wherein said cassette transport means includes a belt support bed supporting a toothed belt carrying the cassette engaging element and a motor for conveying said belt about said support bed.

38. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and having a worksurface for supporting the printing sheet, the worksurface including a print axis and a printing sheet translation axis;

means for translating the printing sheet along a printing sheet translation axis;

10 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

a printhead carriage including:

15

a base structure mounted with the printer for translation in the direction of the print axis;

20

a cantilever arm pivotably mounted at a first end to said base structure for pivoting about an axis generally transverse to said print axis, said cantilever arm mounting a thermal printhead having an array of thermal printing elements extending parallel to the printing sheet translation axis;

25

a pivot actuator coupled to said base and to the other end of said cantilever arm for selectively pivoting said cantilever arm about the pivot axis for lowering and raising the thermal printhead;

30

donor sheet handling means mounted with said base structure for interposing the donor sheet between the thermal printhead and the printing sheet supported by the worksurface, the donor sheet handling means including a supply shaft for engaging a supply roll of the donor sheet, a take-up shaft for engaging a take-up roll of donor sheet that has been interposed between the thermal printhead and the printing sheet, and a take-up motor rotationally coupled to the take-up shaft.

39. The wide format thermal printer of claim 38 including a semiconductor memory element mounted with said thermal printhead and storing data representative of the resistances of the thermal printing elements, and wherein said thermal printing elements are energized for printing responsive to said stored data.

40. The wide format thermal printer of claim 38 wherein said thermal printhead mounts to the printer via a single trunnion joint.

41. The wide format thermal printer of claim 38 wherein said donor sheet handling means includes:

5 a cassette receiving station mounted with said base plate for receiving a cassette that includes donor sheet supply and take-up rolls, said cassette receiving station adapted for receiving the cassette such that a section of donor sheet between the supply and take up rolls is positioned under the thermal printhead for being interposed between the printhead and the printing sheet when printing, said receiving station including a supply and take-up drive elements for engaging drive elements mounted
10 with the cassette and rotationally coupled to supply and take-up rolls respectively, said printhead carriage including a take-up motor rotationally coupled to said take-up drive elements and a brake for braking said supply roll.

42. The wide format thermal printer of claim 41 including a donor cassette storage rack extending parallel to the print axis for mounting a plurality of donor sheet cassettes in a row;

5 said cassette receiving station including a cassette transport means extending from said cassette receiving station toward the cassette storage rack and including a translatable engaging element for engaging a donor sheet cassette for transporting the cassette between said cassette receiving station and said storage rack; and

10 wherein said base structure slidably mounts said receiving station, said station being above said cantilever arm such that the cantilever arm can be upwardly pivoted for engaging and vertically displacing the receiving station and engaging element for engaging a cassette mounted on the cassette storage rack.

43. The wide format thermal printer of claim 42 wherein said cassette transport means includes a belt support bed supporting a toothed belt carrying the cassette engaging element and a motor for conveying said belt about said support bed.

44. The wide format thermal printer of claim 38 wherein said printing sheet translation means includes:

5 a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface and extending across the workbed from a first end to second end parallel to the print axis for translating the printing sheet in the direction of the printing sheet translation axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly
10 spaced from one another in the direction of the printing sheet translation axis;

first and second independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair; and

15 wherein said printer includes an edge sensor mounted for translation with said thermal printhead assembly for sensing the edge of the printing sheet for determining the alignment of the printing sheet relative to the workbed .

45. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to a controller and machine readable data representative of the graphic product, comprising:

5 a workbed including a platen for providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

10

a thermal printhead having an array of thermal printing elements extending parallel to the printing sheet translation axis;

15

donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between said thermal printhead and the printing sheet;

20

said thermal printhead being translatable parallel to the print axis for printing on the printing sheet in print swaths extending parallel to the print axis in an area between the clamps by pressing the donor sheet against the printing sheet and selectively energizing the thermal printing elements;

25

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

30

a controller in communication with said printing sheet translation means, said thermal printhead, said donor sheet means and said means for securing the printing sheet for printing the multicolor graphic product on the printing sheet responsive to the stored data representative of the multicolor graphic product, and wherein said controller includes programming stored in a memory associated therewith for controlling printing sheet translation means to translate the printing sheet in one direction parallel to the printing sheet translation axis between successive print swaths when printing one of the color planes and to translate the printing sheet in the opposite direction parallel to the printing sheet translation axis when printing a different color plane.

35

46. The wide format thermal printer of claim 45 wherein said printing sheet translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface, and each extending across the workbed in the direction of the print axis
- 5 from a first end to second end, the clamps for translating the printing sheet in the direction of the printing sheet translation axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis, said printing sheet translation means further including at
- 10 least one actuator coupled to the clamp pair for translating the clamp pair in the direction of the printing sheet translation axis between first and second positions.

47. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the color planes, comprising the steps of:

5 A) supporting the printing sheet with a worksurface;

 B) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet, the thermal printhead having an array of thermal
10 printing elements extending parallel to a printing sheet translation axis;

 C) printing the color plane on the printing sheet in print swaths extending parallel to a print axis substantially orthogonal to the printing sheet translation axis by repeating the following steps 1) and 2) alternately

15 1) translating the printhead parallel to the print axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead;

20 2) translating the printing sheet parallel to the translation axis between print swaths;

and

25 D) performing steps A, B, and C for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated in the opposite direction parallel to the translation axis between consecutive swaths to that in which it is translated
30 between consecutive swaths when printing a different color plane.

48. The method of claim 47 including:

5 providing a vacuum workbed having apertures in a worksurface thereof, the step supporting the printing sheet including supporting the printing sheet on the worksurface of the vacuum workbed;

applying suction to the apertures when printing a print swath for securing the printing sheet to the workbed; and

10 refraining from applying suction to the apertures when translating the printing sheet for releasing the printing sheet from the workbed .

49. The method of claim 47 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp is movable between clamped and unclamped conditions relative to the printing sheet supported on the worksurface and wherein each clamp extends from a
5 first end to second end parallel to the print axis, and the first ends are mechanically coupled to one another and the second ends mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the translation axis; and

10 translating the clamp pair parallel to the translation axis;

50. The method of claim 49 wherein the step of translating the clamp pair including energizing first and second actuators mechanically coupled to the first and second ends, respectively, of the clamps for translating the first and second ends substantially the same distance parallel to the translation axis.

5

51. A method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the graphic product, comprising the steps of:

5

selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead and the printing sheet, the thermal printhead having an array of printing elements extending for a printing width along a printing sheet translation axis;

10

printing the color plane onto the printing sheet in successive print swaths by translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead;

15

translating the printing sheet in the direction of the printing sheet translation axis between print swaths; and

20

wherein, for at least one print swath, when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, printing that swath includes refraining from pressing the donor sheet against the printing sheet with the printhead when translating the printhead at least part of the distance between the consecutive pixels, whereby the refraining from pressing substantially prevents donor sheet from being drawn past the printhead, thereby conserving donor sheet.

52. The method of claim 51 wherein refraining from pressing with the thermal printhead includes refraining from pressing with the printhead when the consecutive pixels to be printed are separated by at least a minimum distance of 2 inches.

53. The method of claim 51 including the steps of, prior to printing a print swath, performing the steps of:

5 selecting a region in a memory, wherein the memory region includes a memory location for each pixel of the print swath, the memory locations corresponding to rows and columns of pixels;

10 storing in each memory location data indicative of whether the pixel corresponding to that memory location is to be printed on the printing sheet;

examining the memory locations for determining when the number of consecutive blank rows exceeds a threshold number; and

15 when the number of blank rows exceeds the threshold number, the step of refraining from pressing the thermal printhead against the donor sheet corresponds to refraining from pressing when the thermal printhead is position for printing at least some of the pixels of the blank rows:

54. The method of claim 51 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled
5 such that the clamps are substantially fixedly spaced in the direction of the printing sheet translation axis; and

translating the clamp pair in the direction of the printing sheet translation axis.

10 55. The method of claim 54 wherein the step of translating the clamp pair includes energizing first and second actuators mechanically coupled to the first and second ends, respectively, of the clamps for translating the first and second ends substantially the same distance in the direction of the printing sheet translation axis.

56. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to selected machine readable data representative of the graphic product, comprising the steps of:

- 5 A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet, the thermal printhead having an array of printing elements extending along a printing sheet translation axis;
- 10 B) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to printing sheet translation axis by repeating the following steps 1) and 2) alternately
 - 15 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead;
 - 2) translating the printing sheet in the direction of the printing sheet translation axis between print swaths; and
 - 20 C) performing steps A) and B) for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated in the opposite direction along the printing sheet translation axis between successive print swaths to that in which it is
 - 25 translated between successive swaths when printing a different color plane; and

 wherein, for at least one print swath, when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, printing that swath includes refraining from pressing the donor sheet against the printing sheet

30 with the printhead when translating the printhead at least part of the distance between the consecutive pixels, whereby the refraining from pressing substantially prevents donor sheet from being drawn past the printhead, thereby conserving donor sheet.

57. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in separate color planes responsive to machine readable data representative multicolor graphic product, comprising the steps of:

- 5 A) selecting a supply length of donor sheet corresponding to a color plane to be printed and interposing a section of the supply length between a thermal printhead and the printing sheet, the thermal printhead having an array of printing elements extending from a trailing end to a leading end along a printing sheet translation axis;
- 10 B) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to the printing sheet translation axis by repeating the following steps 1) and 2) alternately
 - 15 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead and print on the printing sheet;
 - 20 2) translating the printing sheet in the direction of the printing sheet translation axis in an integer number of separate steps, each step translating the printing sheet by a translation increment substantially equal to the printing width; and
- 25 C) wherein in performing step B, at least one of the steps 1) includes translating the printing sheet in at least two steps, wherein one of the steps translates the printing sheet by a distance less than the increment and the other and any additional steps each translate the printing sheet by the increment.

58. The method of claim 57 wherein the step of translating the printing sheet in at least two steps includes translating the printing sheet such that the trailing end of the array of thermal printing elements array is substantially aligned for printing the next nearest pixel, in the direction of the printing sheet translation axis, of the next print swath.

59. The method of claim 57 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled such that the clamps are substantially fixedly spaced along the direction of translation; and

translating the clamp pair in the direction of the printing sheet translation axis.

60. The method of claim 57 including performing steps A) and B) for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated between successive swaths in the opposite direction along the printing sheet translation axis to that in which it is translated when printing successive swath of a different color plane.

61. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in separate color planes responsive to machine readable data representative multicolor graphic product, comprising the steps of:

- 5 A) organizing a selected color plane into selected areas of the color plane, wherein within each area the objects to be printed are within a selected distance of each other along a printing sheet translation axis and wherein the objects within any one area are separated in the direction of the printing sheet translation axis from the objects in the other areas by a distance greater than the selected distance;
- 10 B) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;
- 15 C) printing each of the areas of the color plane on the printing sheet in print swaths having a printing width and extending along a print axis orthogonal to the printing sheet translation axis by repeating the steps 1) and 2) alternately
- 20 1) a) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor sheet past the printhead; and
- 25 b) translating the printing sheet by a selected increment in the direction of the printing sheet translation axis between successive print swaths having a swath width in the direction of the printing sheet translation axis, and alternately repeating steps a) and b) as necessary until the area is printed; and
- 30 2) before printing the next area translating the printing sheet in the direction of the printing sheet translation axis by the distance substantially equal to the distance separating the area printed in 1) above and the next area to be printed.

62. The method of claim 61 wherein the step of organizing the color plane into areas to be printed includes organizing the color plane into rectangular areas having a first pair of sides parallel to the print axis and separated in the direction of the printing sheet translation axis by a distance that is an integral number of printing swath widths and

5 second pair of sides that are parallel to the printing sheet translation axis.

63. The method of claim 61 including the step of:

- 5 D) performing steps A), B) and C) for each of the color planes to be printed so as to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated between successive swaths in the opposite direction along the printing sheet translation axis to that in which it is translated when printing successive swaths of a different color plane.

64. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the graphic product, comprising the steps of:

- 5 A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;
- 10 B) printing the color plane on the printing sheet in print swaths extending along a print axis, and having a selected width along a printing sheet translation axis substantially orthogonal to the print axis, by repeating the steps 1) and 2) alternately
- 15 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor material past the printhead;
- 20 2) translating the printing sheet in the direction of the printing sheet translation axis by a distance substantially equal to at least the selected width; and
- 25 C) performing steps A) and B) for each of the color planes to be printed to print the multicolor graphic product on the printing sheet, wherein when printing at least one of the color planes the printing sheet is translated between successive swaths in the opposite direction along the printing sheet translation axis to that in which it is translated when printing successive swath of a different color plane; and
- 30 wherein performing one of the steps 1) for at least one of the color planes includes translating the printing sheet in at least two steps wherein one of the steps translates the printing sheet a distance less than the selected width and any additional steps are each substantially equal to the selected width.

65. The method of claim 64 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled
5 such that the clamps are substantially fixedly spaced along the direction of translation; and

translating the clamp pair in the direction of the printing sheet translation axis.

66. A method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, comprising the steps of:

5 A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array of printing elements extending for a predetermined printing width along a printing sheet translation axis;

10 B) selecting first and second portions of the color plane to be printed on the printing sheet, the step of selecting including

determining the end in the direction of the printing sheet translation axis of the color plane to which the printhead is currently the nearest; and

15 selecting the first portion of the color plane to be between the printhead and the nearer end of the color plane and the second portion to be the remainder of the color plane; and

20 C) printing the first portion of the color plane onto the printing sheet before printing the second portion of the color plane, wherein printing each of the portions includes printing in successive print swaths, each having a printing width, by translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and translating the printing sheet in the direction of the printing sheet translation axis
25 between print swaths.

67. The method of claim 66 wherein when printing the first portion of the color plane the direction of translation of the printing sheet in the direction of the printing sheet translation axis between consecutive swaths is the same as that between consecutive print swaths when printing the section portion of the color plane on the printing sheet.

68. The method of claim 66 wherein when printing the first portion of the color plane the direction of translation of the printing sheet in the direction of the printing sheet translation axis between consecutive swaths is the opposite of the direction of translation between consecutive print swaths when printing the second portion of the color plane on the printing sheet.

69. The method of claim 66 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled such that the clamps are substantially fixedly spaced along the direction of translation; and

translating the clamp pair in the direction of the printing sheet translation axis.

70. A method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, comprising the steps of:

- 5 A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array printing elements extending for a predetermined printing width along a printing sheet translation axis;
- 10 B) printing first and second portions of the color plane, wherein printing each of the portions includes printing in successive prints swaths having a printing width in the direction of the printing sheet translation axis by successively translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and translating the printing sheet in the direction of the printing sheet translation axis
- 15 between print swaths; and

 wherein when printing the first portion of the color plane the printing sheet is translated in one direction along the printing sheet translation axis between print swaths and when printing the second portion the printing sheet is translated in the opposite

20 direction between print swaths.

71. The method of claim 70 wherein the step of selecting first and second portions of the color plane includes:

- determining the end in the direction of the printing sheet translation axis of the
- 5 color plane to which the printhead is nearest;

 selecting the first portion of the color plane to be between the printhead and the nearer end of the color plane and printing that portion of the color plane on the printing sheet before the second portion of the color plane.

72. The method of claim 70 including the step of, prior to performing step A)

determining the position of the printhead in the direction of the printing sheet translation axis relative to the first and second ends of the color plane;

5

determining which of the ends of the color plane is nearer thermal printhead;

selecting the selected direction of translation in the direction of the printing sheet translation axis to be toward the nearer end of the color plane to be printed.

10

73. The method of claim 72 wherein the step of determining the position of the printhead in the direction of the printing sheet translation axis includes determining the position responsive to machine readable data representative of the cumulative prior translations of the printing sheet; and

5

wherein the step of determining the which of the edges of the color plane is nearer includes comparing the position with the known relationship of the selected color plane to the printing sheet.

74. The method of claim 70 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps; wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled such that the clamps are substantially fixedly spaced along the direction of translation; and

5

translating the clamp pair in the direction of the printing sheet translation axis.

75. A method of printing with a thermal printer that prints a multicolor graphic product on a printing sheet in each of different color planes responsive to machine readable data representative of the multicolor graphic product, comprising the steps of:

- 5 A) selecting a supply length of donor sheet corresponding to the color plane to be printed and interposing a section of the supply length between the thermal printhead and the printing sheet;
- 10 B) printing the color plane on the printing sheet in print swaths extending along a print axis and having a selected width along a printing sheet translation axis substantially orthogonal to the print axis by repeating the following steps 1) and 2) alternately
 - 15 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to print on the printing sheet and draw the donor sheet past the printhead;
 - 20 2) translating the printing sheet a distance substantially equal to at least the selected width in a selected direction along the printing sheet translation axis; and
- 25 C) performing steps A) and B) for each of the remaining color planes to be printed to print the multicolor graphic product on the printing sheet; and
- 30 wherein after finishing printing a color plane and prior to printing the next color plane, performing the step of
 - 35 determining whether one of the end of the color plane to be printed next is nearer, in the direction of the printing sheet translation axis, the current position of the printhead than the other end of the color plane to be printed; and
 - when one end is nearer, printing at least part of that portion of the color plane between the printhead and the nearer end of the color plane before printing a least part of portion of the color plane between the printhead and the other end of the color plane.

76. The method of claim 75 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled
5 such that the clamps are substantially fixedly spaced along the direction of translation; and

translating the clamp pair in the direction of the printing sheet translation axis.

77. A method of thermally printing a color plane of a multicolor graphic product on a printing sheet responsive to machine readable data representative of the color plane, comprising the steps of:

5 determining that the color plane to be printed includes an object to be knocked out by one of another spot color object and a process color object in the finished graphic product to be printed on the printing sheet;

10 A) selecting a donor sheet corresponding to the color plane to be printed and interposing the donor sheet between a thermal printhead having an array of printing elements extending along a printing sheet translation axis;

15 B) printing the color plane onto the printing sheet including printing in successive prints swaths, each having a printing width, by translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and selectively energizing the thermal printing elements responsive to the machine readable data and, between printing successive print swaths, translating the printing sheet in the direction of the printing sheet translation axis, and

20 refraining from printing those areas of the color plane determined to be knocked out.

78. The method of claim 77 including when printing at least one of the print swaths, determining when consecutive pixels to be printed are separated in the direction of the print axis by more than a minimum distance of all blank pixels, including blank pixels corresponding to the knocked out portion of the one object, and upon determining that
5 the consecutive pixel are so separated, lifting the thermal printhead away from the printing sheet when translating the printhead at least part of the distance between the consecutive pixels for substantially preventing donor sheet from being drawn past the printhead, thereby conserving donor sheet.

79. The method of claim 77 wherein when printing one of the color planes the printing sheet is translated in the opposite direction along the printing sheet translation axis between consecutive swaths to that in which it is translated between consecutive swaths when printing a different color plane.

80. The method of claim 77 wherein the step of translating the printing sheet includes clamping the printing sheet with at least one of a pair of translatable clamps, wherein each clamp extends from a first end to second end in the direction of the print axis, and the first ends are mechanically coupled and the second ends mechanically coupled
5 such that the clamps are substantially fixedly spaced along the direction of translation; and

translating the clamp pair in the direction of the printing sheet translation axis.

81. A method for processing data representative of a multicolor graphic product with a computer for printing the multicolor graphic product on a printing sheet in separate color planes with a thermal printer that translates the printing sheet along a printing sheet translation axis and translates a thermal printhead along a print axis perpendicular to the printing sheet translation axis, and wherein the thermal printhead includes an array of thermal printing elements extending along the direction of the printing sheet translation axis for printing in print swaths extending in the direction of the print axis, comprising the steps of:

providing a machine readable data file including data representative of the multicolor graphic product

selecting a color plane to be printed;

examining the data file to select objects that are of the color of the selected color plane;

associating a rectangular area of the color plane with each object;

combining those areas that are within a selected distance of each other along printing sheet translation axis;

increasing the dimension, of each of the areas, that extends in the direction of the print axis such that the width is an integral number of printing widths;

selecting each of the areas for printing, and when selecting each of the areas, performing the steps of

dividing the selected area into an integral number of print swaths;

selecting each of the print swaths in turn and storing machine readable data corresponding to the objects to be printed in the selected print swath for instructing the printer for printing the print swath.

82. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 printing sheet translation means for translating the printing sheet in the direction of the printing sheet translation axis;

15 a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending substantially parallel to the printing sheet translation axis, said thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead when said thermal printhead is translated in the direction of the print axis;

20 donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between said thermal printhead and the printing sheet, said donor sheet apparatus being

25 translatable with said thermal printhead in the direction of the print axis;

30 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

35 a controller in communication with, and for controlling, said printing sheet translation means, said thermal printhead, said take-up motor, said first and second actuators and said means for securing the printing sheet, and wherein said controller includes programming stored in a memory associated therewith for:

- 1) printing a color plane onto the printing sheet in successive print swaths by translating the thermal printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the donor sheet against the printing sheet with the thermal printhead;
40
- 2) translating the printing sheet in the direction of the printing sheet translation axis between the printing of successive print swaths; and for
- 45 3) when printing at least one print swath, determining when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, and upon determining that the consecutive pixel are so separated, lifting the thermal printhead away from the printing sheet when translating the printhead at least part of the distance between the consecutive pixels for substantially preventing
50 donor sheet from being drawn past the printhead, thereby conserving donor sheet.

83. The wide format thermal printer of claim 82 wherein said programming for determining when consecutive pixels are separated by at least a minimum distance includes determining that the consecutive pixel are separated by at least a minimum distance of approximately 2 inches.

84. The wide format printer of claim 82 wherein said programming for determining that consecutive pixels are separated by the minimum distance includes programming for performing the following prior to printing a selected print swath:

5 selecting a region in memory associated with the controller, wherein the memory region includes a memory location for each pixel of the print swath, the memory locations corresponding to rows and columns of pixels;

10 storing in each memory location data indicative of whether the pixel corresponding to that memory location is to be printed on the printing sheet; and

 examining the memory locations for determining when the number of consecutive blank rows exceeds a threshold number, said threshold number corresponding to the minimum distance.

15

85. The wide format thermal printer of claim 82 wherein said controller further includes programming for, when printing at least one of the color planes, translating the printing sheet in a first direction along the printing sheet translation axis between printing print swaths and when printing another color plane, translating the printing sheet
5 in the opposite direction along the printing sheet translation axis between printing print swaths.

86. The wide format thermal printer of claim 82 wherein said printing sheet translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface and extending across the workbed from a first end to second end parallel to the print axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis; and

10 left and right independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair in the direction of the printing sheet translation axis.

87. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, said thermal printer including a first actuator for
15 translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead said thermal printhead is translated in the direction of the print axis;

20 donor sheet apparatus including a take-up shaft coupled to a take-up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between
25 said thermal printhead and the printing sheet, said donor sheet apparatus being translatable with said thermal printhead in the direction of the print axis;

30 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

a controller in communication with, and for controlling, said printing sheet translation means, said thermal printhead, said take-up motor, said first and second actuators and said means for securing the printing sheet, and wherein said controller
35 includes programming stored in a memory associated therewith for

A) printing the color plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to the printing sheet translation axis by repeating the following items 1) and 2) alternately

- 40 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead and print on the printing sheet in print swaths extending in the direction of the print axis and having a swath
- 45 width in the direction of the printing sheet translation axis;
- 2) translating the printing sheet in the direction of the printing sheet translation axis in an integer number of separate steps, each step translating the printing sheet by a translation increment substantially equal
- 50 to the printing width;

and

- B) wherein 1) includes translating the printing sheet in at least two steps,
- 55 wherein one of the steps translates the printing sheet by a distance less than the translation increment and the other and any additional steps each translate the printing sheet by the translation increment.

88. The wide format thermal printer of claim 87 wherein said printing sheet translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface and extending across the workbed from a first end to second end parallel to the print axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis; and
- 10 left and right independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair.

89. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

15 a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, said thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead said thermal printhead is translated in the direction of the print axis;

20 donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between said thermal printhead and the printing sheet, said donor sheet apparatus being

25 translatable with said thermal printhead in the direction of the print axis;

30 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

a controller in communication with, and for controlling, said printing sheet translation means, said thermal printhead, said take-up motor, said first and second actuators and said means for securing the printing sheet, and wherein said controller

35 includes programming stored in a memory associated therewith for

A) organizing a selected color plane into selected areas of the color plane, wherein within each area the objects to be printed are within a selected distance of each other along a printing sheet translation axis and wherein the objects within any one area are separated in the direction of the printing sheet translation axis from the objects in the other areas by a distance greater than the selected distance;

B) printing each of the areas of the color plane on the printing sheet in print swaths extending along a print axis orthogonal to the printing sheet translation axis and having a swath width in the direction of the printing sheet translation axis by repeating the steps 1) and 2) alternately

1) a) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet so as to draw the donor sheet past the printhead; and before printing the next area

b) translating the printing sheet in the direction of the printing sheet translation axis, by a selected increment substantially equal to the swath width, between successive print swaths, and alternately repeating steps a) and b) as necessary until the area is printed; and

2) translating the printing sheet in the direction of the printing sheet translation axis by the distance substantially equal to the distance separating the area printed in 1) above and the next area to be printed.

90. The wide format printer of claim 89 wherein said programming for organizing the color plane into areas includes organizing the color plane into rectangular areas having a first pair of sides parallel to the print axis and separated in the direction of the printing sheet translation axis by a distance that is an integral number of printing swath widths and second pair of sides that are parallel to the printing sheet translation axis.

91. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

15 a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, said thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis;

20 donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between said thermal printhead and the printing sheet, said donor sheet apparatus being translatable with said thermal printhead in the direction of the print axis

25 means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

30 a controller in communication with, and for controlling, said printing sheet translation means, said thermal printhead, said take-up motor, said first and second actuators and said means for securing the printing sheet, and wherein said controller includes programming stored in a memory associated therewith for:

35 A) selecting first and second portions of the color plane to be printed on the printing sheet, said selecting including

determining the end in the direction of the printing sheet translation axis of the color plane to which the printhead is currently the nearest; and

40 selecting the first portion of the color plane to be between the printhead and the nearer end of the color plane and the second portion to be the remainder of the color plane; and

45 B) printing the first portion of the color plane onto the printing sheet before printing the second portion of the color plane, wherein printing each of the portions includes printing in successive print swaths, each having a printing width, by translating the thermal printhead along a print axis orthogonal to the printing sheet translation axis and selectively energizing the thermal printing elements responsive to the machine readable data representative of the multicolor graphic product and translating the printing sheet in the direction of the printing sheet translation axis between print swaths.

92. The wide format printer of claim 91 wherein said controller further includes programming for, when printing the first portion of the color plane, translating the printing sheet in the direction of the printing sheet translation axis in one direction between consecutive swaths and when printing the second portion of the color plane,
5 translating the printing sheet in the same direction in the direction of the printing sheet translation axis between consecutive print swaths.

93. The wide format printer of claim 91 wherein said controller further includes programming for, when printing the first portion of the color plane, translating the printing sheet in the direction of the printing sheet translation axis in one direction between consecutive swaths and when printing the second portion of the color plane,
5 translating the printing sheet in the opposite direction along the print sheet translation axis between consecutive print swaths.

94. The wide format thermal printer of claim 91 wherein said printing sheet translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface and extending across the workbed from a first end to second end parallel to
5 the print axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis; and

10 left and right independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair.

95. A wide format thermal printer for printing a multicolor graphic product onto a printing sheet in separate color planes and responsive to machine readable data representative of the graphic product, comprising:

5 a workbed including a platen and providing a worksurface for supporting the printing sheet, said worksurface containing a print axis and printing sheet translation axis perpendicular to the print axis;

10 printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

15 a thermal printhead translatable in the direction of the print axis, the thermal printhead including an array of thermal printing elements extending parallel to the printing sheet translation axis, said thermal printer including a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead said thermal printhead is translated in the direction of the print axis;

20 donor sheet apparatus including a take-up shaft coupled to a take up motor and a supply shaft, said take-up and supply shafts for coupling to take-up rolls and supply rolls, respectively, of donor sheet, said take-up motor for winding the donor sheet on the take-up roll after the donor sheet is drawn from the supply roll and interposed between said thermal printhead and the printing sheet, said donor sheet apparatus being
25 translatable with said thermal printhead in the direction of the print axis

means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet;

30 a controller in communication with, and for controlling, said printing sheet translation means, said thermal printhead, said take-up motor, said first and second actuators and said means for securing the printing sheet, and wherein said controller includes programming stored in a memory associated therewith for:

- 35 1) determining from the machine readable data that a first color plane to be
printed before a second color plane includes at least one object including a portion to be
knocked out by an object of the color of the second color plane;
- 40 2) printing the first a color plane onto the printing sheet in successive print
 swaths, each having a printing width, by translating the thermal printhead
 in the direction of the print axis and selectively energizing the thermal
 printing elements while pressing the donor sheet against the printing sheet
 with the thermal printhead and, between successive print swaths,
 translating the printing sheet in the direction of the printing sheet
45 translation axis between print swaths; and
- 3) refraining from printing that portion of the object determined to be knocked
 out.

50

96. The wide format printer of claim 95 wherein said controller further includes programming for when printing at least one of the print swaths, determining when consecutive pixels to be printed are separated in the direction of the print axis by more than a minimum distance of all blank pixels, including blank pixels corresponding to the
5 knocked out portion of the one object, and upon determining that the consecutive pixel are so separated, lifting the thermal printhead away from the printing sheet when translating the printhead at least part of the distance between the consecutive pixels for substantially preventing donor sheet from being drawn past the printhead, thereby conserving donor sheet.

10

97. The wide format thermal printer of claim 95 wherein said controller further includes programming for printing one of the color planes by translating the printing sheet in the opposite direction along the printing sheet translation axis between consecutive swaths to that in which it is translated between consecutive swaths when
5 printing a different color plane.

98. The wide format thermal printer of claim 95 wherein said printing sheet translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the printing sheet supported on said worksurface and extending across the workbed from a first end to second end parallel to
5 the print axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the printing sheet translation axis;
and

10

left and right independent actuators coupled to the first and second ends, respectively, of the translatable clamps for translating the clamp pair.

99. A method of aligning a sheet material disposed upon a worksurface for enhancing printing or other operations on the sheet material, comprising the steps of:

placing the sheet material over the worksurface;

5

determining the alignment of the sheet material in a coordinate system having first and second axes for specifying locations relative to the worksurface and the sheet material overlaying the worksurface; and

10

differentially driving spaced portions of the sheet material for moving the sheet material for providing a selected alignment of the sheet material.

100. The method of claim 99 wherein the step of placing the sheet material over the worksurface includes the step of placing the sheet material over a flat worksurface.

101. The method of claim 99 wherein the step of placing the sheet material over the worksurface includes placing the sheet material over a cylindrical worksurface.

102. The method of claim 99 wherein the step of determining the alignment of the sheet material includes determining the skew of the printing sheet, and wherein the step of differentially driving spaced portions for providing a selected alignment includes differentially driving for providing a selected skew of the printing sheet.

103. The method of claim 99 wherein the step of determining the alignment of the sheet material includes determining the distance of a selected location on an edge of the sheet material from a selected location in the coordinate system, and wherein the step of differentially driving spaced portions of the sheet material for moving the sheet material for providing a selected alignment includes differentially driving spaced portions that the selected location on the edge of the sheet material is within a selected distance of the selected in the coordinate system.

5

104. The method of claim 99 wherein the step of differentially driving spaced portions of the sheet material includes:

- 5 providing a pair of translatable sheet material clamps each extending from a first end to second end and spanning a dimension of the sheet material for clamping and translating the sheet material relative to the worksurface, the first ends mechanically coupled and the second ends mechanically coupled such that the clamps are substantially fixedly spaced along the direction of translation;
- 10 clamping the sheet material with at least one of the clamps; and
- differentially translating the first and second ends of the clamps.

105. The method of claim 104 wherein the step of providing the pair of translatable clamps includes providing a pair of magnetic bar clamps each having a top portion housing a plurality of electrical coils and a magnetic keeper portion for clamping the sheet material between the keeper and the top portion.

106. The method of claim 104 wherein the step of placing the sheet material over the worksurface includes placing the sheet material over a flat worksurface.

107. The method of claim 99 wherein the step of differentially driving spaced portions of the sheet material includes

providing a pair of spaced frictional drive wheels for frictionally translating the sheet material relative to the worksurface

- 5 contacting the sheet material with the pair of wheels; and
- differentially rotating the drive wheels.

108. The method of claim 99 wherein the step of determining the alignment of the sheet material includes:

providing a sensor translatable along one of the axes;

translating the sensor across the edge of the sheet material and sensing a first location of the edge;

translating the sheet material a known distance along the other of the axes;

translating the sensor across the edge of the sheet material and sensing a second location of the edge of the sheet; and

determining the skew of the sheet material from the difference between the first and second locations of the edge and the known translation distance.

109. The method of claim 108 wherein the step of providing a sensor includes providing an optical sensor for transmitting a beam and receiving light from the reflection of the transmitted beam.

110. The method of claim 109 including the step of providing a reflective material under the sheet material for enhancing the difference in reflected light as the sensor is translated across the edge of the sheet material.

111. The method of claim 99 wherein the step of determining alignment of the sheet material includes:

5 providing a sensor mounted with the worksurface and including an array of pixels extending in the direction of one of the axes;

providing a light source for illuminating the sensor;

10 sensing a first location in the direction of the one of the axes of the edge of the sheet material with the sensor;

translating the sheet material a known distance along the other of the axes;

15 sensing a second location in the direction of the one of the axes of the edge of the sheet material with the sensor; and

determining the skew of the sheet material from the difference between the first and second locations of the edge and the known translation distance.

112. The method of claim 99 including, subsequent to the step of differentially driving space portion to provide a selected alignment , the steps of:

5 determining the residual skew of the sheet material; and

translating the sheet material for printing thereon, the step of translating including steering the material so as to maintain the residual skew of the sheet material.

113. The method of claim 112 wherein the step of steering includes repeatedly determining the skew of the sheet material so as monitor the residual skew, and differentially driving the left and right actuators as necessary to maintain the residual skew.

114. An apparatus for supporting a sheet material on a worksurface with a selected alignment and for performing work operations on the sheet material responsive to a controller, comprising:

5 a workbed providing the worksurface for supporting the sheet material, the worksurface containing a workhead axis and a sheet material translation axis perpendicular to the workhead axis;

10 a workhead for performing the work operation upon the sheet material, said workhead being translatable parallel to the work axis for printing on the sheet material;

means for securing the sheet material to the worksurface when working of the sheet material and for releasing the sheet material from the worksurface when translating the sheet material;

15

sensing means for sensing an edge of the sheet material; and

20 sheet material translation means for translating the sheet material in the direction of the sheet material translation axis, said sheet material translation means including means for differentially driving spaced portions of the sheet material, responsive to said sensing means, for providing a selected alignment of the sheet material relative to the worksurface.

115. The apparatus of claim 114 wherein said sheet material translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the sheet material supported on said worksurface and extending across the worksurface from a first end to second end and parallel to the work axis for
5 translating the sheet material in the direction of the sheet material translation axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the sheet material translation axis; and wherein said means for differentially driving spaced portions includes:

10

first and second actuators, coupled to the first and second ends, respectively, of said clamp pair, for independently translating the first and second ends of the clamp pair in the direction of the sheet material translation axis.

116. The apparatus of claim 114 wherein said sheet material translation means includes first and second friction wheels spaced apart from one another along the direction of the work axis and disposed for contacting the sheet material, and wherein said means for differentially driving includes first and second actuators coupled to the
5 first and second friction wheels.

117. The apparatus of claim 114 wherein said sensing means includes a sensor mounted with said workhead for translation with said workhead in the direction of the work axis.

118. An apparatus for supporting a sheet material on a worksurface with a selected alignment for performing work operations on the sheet material, comprising:

5 a workbed for providing the worksurface for supporting the sheet material, said worksurface containing a work axis and sheet material translation axis perpendicular to the work axis;

sheet material translation means for translating the sheet material in the direction of the sheet material translation axis;

10 a workhead for performing the work operations upon the sheet material, the workhead being translatable parallel to the work axis;

15 means for securing the sheet material to the worksurface when printing on the sheet material and releasing the sheet material from the worksurface when translating the sheet material;

20 an edge sensor for sensing an edge of the sheet material, said sensor mounted with the workhead for translation therewith in the direction of the work axis;

a controller in communication with said workhead, said sheet material translation means and said edge sensor for controlling the work operation on the sheet material responsive to data stored in a memory, and wherein

25 said controller includes programming, stored in a memory associated therewith, for determining the alignment of the sheet material, said programming including instructions for the following: translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a first communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work
30 axis; energizing the sheet material translation means for translating the sheet material a known distance in the direction of the sheet material translation axis; translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a second communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; and determining the skew of the
35 sheet material responsive to said first and second communications and said known translation distance.

119. The apparatus of claim 118 wherein said sheet material translation means includes first and second independent actuators in communication with said controller, and wherein said controller, responsive to the determination of the skew, controls said first and second actuators so as to provide a selected skew of the sheet material.

120. The apparatus of claim 119 including a position sensor in communication with the controller and for providing a signal responsive to the position of said sensor in the direction of the work axis, and wherein said controller, responsive to at least one of the first and second communications and to said signal from said position sensor instructs
5 said first and second actuators for varying the location of the edge of the sheet material in the direction of the work axis.

121. The apparatus of claim 120 wherein said sheet material translation means includes a pair of translatable clamps each movable between clamped and unclamped conditions relative to the sheet material supported on said worksurface and extending from a first end to second end across the worksurface and parallel to the work axis for
5 translating the sheet material in the direction of the sheet material translation axis, the first ends being mechanically coupled to one another and the second ends being mechanically coupled to one another such that the clamps are substantially fixedly spaced from one another in the direction of the sheet material translation axis; and wherein said first and second actuators, are coupled to the first and second ends,
10 respectively, of said clamp pair.

122. The apparatus of claim 118 wherein said sheet material translation means includes first and second friction wheels spaced apart from one another along the direction of the work axis and disposed for contacting the sheet material, and wherein said first and second actuators are coupled to the first and second friction wheels for
5 rotating said first and second friction wheels, respectively.

123. An edge detection system for providing signals to a controller for detecting the edge of a sheet material in a printer that includes a worksurface for supporting the sheet material, drive means for translating the sheet material along a sheet material translation axis and a workhead translatable along a work axis perpendicular to the sheet material translation axis, the edge detection system comprising:

a first sensor mounted for translation in the direction of the work axis along with the workhead and facing the worksurface for detecting light traveling in a direction upward from the worksurface toward the sensor; and

a second sensor for providing signals responsive to the position of the first sensor in the direction of the work axis.

124. A replaceable thermal printhead assembly for use in a thermal printer to press a donor sheet against a printing sheet and, responsive to communication from a controller associated with the printer, print graphic products on the printing sheet material, comprising:

an array of thermal printing elements;

drive electronics for selectively energizing said thermal printing elements responsive to communications received from the controller associated with the printer; and

a semiconductor element mounted with said drive electronics and said array of thermal printing elements, said semiconductor element including a memory storing data characteristic of the printhead assembly.

125. The printhead assembly of claim 124 wherein said data characteristic of the printhead assembly includes data representative of the resistances of the thermal printing elements.

126. The thermal printhead assembly of claim 125 wherein said data characteristic of the printhead assembly includes data representative of an average resistance of the thermal printing elements.

127. The thermal printhead assembly of claim 125 wherein said data characteristic of the printhead assembly includes data representative of the individual resistance of each of a plurality of said printhead head thermal printing elements.

128. The thermal printhead assembly of claim 125 wherein said data characteristic of the printhead assembly includes data representative of the individual resistance of each of the printhead thermal printing elements normally used in printing.

129. The thermal printhead assembly of claim 124 wherein said printhead assembly is adapted for mounting to the printer by a single coupling joint.

130. The thermal printhead assembly of claim 124 wherein said thermal printing elements are arrayed along a first axis and wherein said thermal printhead assembly is adapted for mounting to the printer by a trunnion joint extending along a trunnion axis substantially perpendicular to said first axis.

131. The thermal printhead assembly of claim 124 wherein the data characteristic of the printhead assembly includes data representative of the history of use of the thermal printhead assembly.

132. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of total time of use of the printer with the thermal printhead assembly installed thereon.

133. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of the total amount of time the thermal printhead has spent pressing donor sheet against printing sheet and printing.

134. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of the total distance traveled by said printhead assembly while pressing donor sheet against printing sheet and printing.

135. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of the total distance traveled by said printhead assembly while pressing selected donor sheet against selected printing sheet.

136. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of the voltages that have been applied to selected thermal printing elements.

137. The thermal printhead assembly of claim 131 wherein said data representative of the history of use of the thermal printhead assembly includes data representative of a number of printing pulses that have been communicated to selected thermal printing elements.

138. The thermal printhead assembly of claim 124 wherein said semiconductor element includes:

5 a processor programmed for tracking a number of print pulses communicated to selected thermal printing elements of the thermal printhead assembly and for storing said number in said memory of the semiconductor element.

139. The thermal printhead assembly of claim 138 wherein said processor is programmed for tracking the total number of print pulses communicated to said thermal printing elements.

140. The thermal printhead assembly of claim 138 wherein said processor is programmed for determining the printing time accumulated on said printhead assembly responsive to said number of pulses communicated to said selected thermal printing elements.

141. The thermal printhead assembly of claim 124 wherein said semiconductor element includes an electrically erasable read-only memory.

142. The thermal printhead assembly of claim 124 including a thermally conductive base mounting said array of thermal printing elements, drive electronics and said semiconductor element, said thermally conductive base including cooling fins formed integrally with said base, said thermally conductive base further including an aperture therethrough for accommodating a trunnion joint pin for mounting the thermal printhead assembly to the thermal printer.

143. The thermal printhead assembly of claim 142 wherein said array of thermal printing elements extends along a first axis, and wherein said trunnion joint pin extends longitudinally in a direction substantially perpendicular to the first axis.

144. A method of operating a thermal printer that presses a donor sheet material against a printing sheet with a thermal printhead assembly and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead assembly and translates the printing sheet for printing graphic products on a selected area of the printing sheet, comprising the steps of:

providing a thermal printhead assembly having the following: thermal printing elements; drive electronics for selectively energizing the thermal printing elements; and a semiconductor element including a memory storing data characteristic of the thermal printhead;

reading the data characteristic of the printhead from the memory; and

energizing the thermal printing elements with the drive electronics responsive to the data read from the memory for printing the graphic products on the printing sheet.

145. The method of claim 144 wherein the step of providing a thermal printhead assembly includes providing a semiconductor memory storing data characteristic of the printhead assembly including data representative of the resistance of the printhead thermal printing elements, and wherein the steps of reading and energizing include, respectively, reading the data representative of the resistance from the memory and energizing the thermal printing elements responsive to the data representative of the resistance of the printhead thermal printing elements.

146. The method of claim 145 including the steps of:

removing the thermal printhead assembly from the printer;

5 empirically measuring a resistance responsive to the resistance of the thermal printing elements;

reading the data related to the resistance of thermal printing elements from the memory; and

10 comparing the empirically measured resistance to the data read from the memory for determining whether the thermal printing elements have changed their electrical characteristics.

147. A method of operating a thermal printer that presses a donor sheet against a printing sheet with a thermal printhead and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead and translates the printing sheet for printing a graphic product on the printing sheet, comprising the steps of:

5 providing a thermal printhead assembly having the following: the thermal printing elements; drive electronics for selectively energizing the thermal printing elements; and a semiconductor element including a memory for storing data;

10 printing the graphic products on the printing sheet with the thermal printhead assembly,

monitoring a printing parameter; and

15 storing data representative of the monitored printing parameter in the memory.

148. The method of claim 147 wherein the step of providing a thermal printhead assembly includes providing a thermal printhead assembly mounting the thermal printing elements in an array extending along a first axis, and wherein the step of printing includes translating the thermal printhead assembly in a direction substantially perpendicular to the first axis while pressing the donor sheet against the printing sheet with the thermal printhead assembly.

149. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring the total distance traveled by the thermal printhead assembly while pressing selected donor sheet against a selected printing sheet.

150. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring the distance traveled by the printhead assembly across a selected type of printing sheet while pressing a selected type of donor sheet against the selected type of printing sheet.

151. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring a number of print pulses communicated to selected thermal printing elements.

152. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring, for each of a plurality of the thermal printing elements, a number related to the number of printing pulses communicated that thermal printing element and an identification of that thermal printing element.

153. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring the voltage applied to selected thermal printing elements.

154. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring the total time of use of the printer with the thermal printing assembly installed thereon.

155. The method of claim 147 wherein the step of monitoring a printing parameter includes monitoring the total amount of time the thermal printhead assembly has spent pressing donor sheet against printing sheet and printing.

156. The method according to claim 147 including the steps of:

removing the thermal printhead assembly from the printer; and

5 reading the stored data representative of the printing parameter from the memory.

157. A method of operating a thermal printer that presses a donor sheet material against a printing sheet with a thermal printhead assembly and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead and translates the printing sheet for printing graphic products on the printing sheet,
5 comprising the steps of:

providing a thermal printhead assembly having the following: the thermal printing elements; drive electronics for selectively energizing the thermal printing elements; and a semiconductor element including a memory storing data characteristic of the
10 printhead;

energizing the thermal printing elements with the drive electronics for printing the graphic products on the printing sheet;

15 removing the thermal printhead assembly from the printer;

measuring data characteristic of the thermal printhead assembly;

reading the data characteristic of the thermal printhead assembly from the
20 memory; and

comparing the measured data characteristic of the thermal printhead assembly to the data characteristic of the thermal printhead assembly read from the memory.

158. The method of claim 157 wherein the step of providing a thermal printhead assembly includes the step of providing a memory storing data characteristic of the thermal printhead assembly including data representative of the resistance of the thermal printing elements, and wherein the step of measuring includes measuring data
5 related to the resistance of selected thermal printing elements of the thermal printhead assembly.

159. A method of tensioning donor sheet in a thermal printer wherein the donor sheet is drawn from a supply roll, interposed between a thermal printhead and a printing sheet and wound on a take-up roll, the method comprising the steps of:

- 5 providing a take-up motor coupled to the take-up roll for providing a rotational torque to the take-up roll responsive to the energization of the take-up motor;
- providing a brake coupled to the donor sheet for applying a selected braking force to the donor sheet;
- 10 reading data characteristic of the donor sheet from a memory element mounted with one of the supply roll and the take-up roll;
- determining a desired tension to be applied to the donor sheet;
- 15 determining the radius of at least the take-up roll as a function of at least the data characteristic of the donor sheet read from the memory element; and
- 20 applying the desired tension to the donor sheet, including the step of selectively energizing the take-up motor as a function of the radius of the take-up roll and the desired tension to be applied to the donor sheet.

160. The method of claim 159 wherein the step of determining the desired tension to be applied to the donor sheet includes determining the desired tension from said data characteristic of the donor sheet read from the memory element.

161. The method of claim 159 wherein the step of reading data characteristic of the donor sheet includes reading the data from a memory element mounted with the supply roll when the supply and take-up rolls are mounted within a cassette held in a storage location.

162. The method of claim 159 wherein the step of determining the radius of the take-up roll includes determining the radius as a function of at least 1) a known length of the donor sheet that when wound on the take-up roll causes said supply roll to have a known radius; 2) the known radius; and) the length of donor sheet wound on the take-up roll, and wherein the step of reading data characteristic of the donor sheet includes reading data representative of the length of the donor sheet wound on the take-up roll.

5

163. The method of claim 162 wherein the step of reading data representative of the length of the donor sheet wound on the take-up roll includes reading data representative of the original length of donor sheet wound on the supply roll and the length of donor sheet remaining on the supply roll.

164. The method of claim 159 wherein the step of selectively energizing the take-up motor includes:

determining a threshold energization of the take-up motor;

5

determining a known tension applied to the donor sheet by the take-up motor when the take-up motor is energized at a known energization and with a known radius of the take-up roll; and

10

energizing the take-up motor as a function of the threshold energization, the known tension, the known energization and the known radius to apply the desired tension to the donor sheet.

165. The method of claim 164 wherein the step of determining the threshold energization includes:

5

rotating the take-up motor in the reverse direction to create slack in the donor sheet;

increasingly energizing the take-up motor for forward rotation;

sensing the rotation of the take-up roll; and

10

noting the threshold energization of the take-up motor, the threshold energization being that energization at which the sensing step determines that the take-up roll is rotating.

166. The method of claim 165 wherein the step of sensing the rotation of the take-up roll includes providing a rotation sensor coupled to the take-up motor for providing signal responsive to the rotation of the take-up motor.

167. The method of claim 159 wherein the step of providing a brake includes the step of providing a magnetic particle brake coupled to a shaft mounting the supply roll, the brake for applying a selected braking torque on the supply roll responsive to the energization of the brake, and wherein the step of determining the radius of at least the take-up roll from the data characteristic of the donor sheet includes determining the radius of the supply roll, and wherein the step of applying the desired tension includes energizing the brake responsive to the radius of the supply roll.

168. The method of claim 159 wherein the step of determining the radius of the supply roll includes determining the radius of the supply roll from data representative of the following: 1) the length of the donor sheet originally wound to form the supply roll; 2) the length of donor sheet remaining on the supply roll; and 3) the original radius of the supply roll, and wherein the step of reading data characteristic of the donor sheet includes reading at least one of the data 1)-3) above.

169. The method of claim 159 wherein the step of reading data characteristic of the donor sheet includes reading data representative of the following: 1) the length of the donor sheet originally wound to form the supply roll; 2) the length of donor sheet remaining on the supply roll; and 3) the original radius of the supply roll, and wherein the step of determining the radius of the take-up roll includes determining the radius from said data enumerated as 1)-3) above.

170. The method of claim 159 wherein the step of selectively energizing the magnetic brake includes:

determining a threshold energization of the magnetic brake;

determining a known braking tension applied to the donor sheet by the magnetic brake, the known tension applied to the donor sheet when the magnetic brake is energized at a known energization and with a known radius of the supply roll; and

energizing the take-up motor as a function of the threshold energization, the known braking tension, the known energization and the known radius to apply the desired tension to the donor sheet.

171. The method of claim 170 wherein the step of determining the threshold energization includes:

increasingly energizing the take-up motor for forward rotation;

5

sensing the rotation of the take-up roll;

increasingly energizing the magnetic brake; and

10 noting the threshold energization of the magnetic brake, the threshold energization being that energization at which the sensing step determines that the take-up roll stops rotating.

172. The method of claim 171 wherein the step of sensing the rotation of the take-up roll includes providing a rotation sensor coupled to the take-up motor for providing signal responsive to the rotation of the take-up motor.

173. A wide format thermal printer for printing a graphic product onto a printing sheet responsive to machine readable data representative of the graphic product, comprising:

a workbed having a worksurface for supporting the printing sheet,

a thermal printhead having an array of thermal printing elements for pressing a donor sheet against the printing sheet for printing on the printing;

printing sheet translation means for translating the printing sheet along a printing sheet translation axis;

donor sheet means including first and second shafts for mounting supply and take-up rolls, respectively, of donor sheet, the donor sheet being drawn from the supply roll, interposed between the thermal printhead and the printing sheet for printing therewith, and wound on the take-up roll, said donor sheet means further including a take-up motor for coupling to the take-up roll for applying a torque thereto and a brake for applying a braking force to the donor sheet;

a data transfer element for reading data from a memory element mounted with one of the supply and take up rolls of donor sheet; and

a controller in communication with said printing sheet translation means, said thermal printhead, said data transfer element and said take-up motor for printing the multicolor graphic product on the printing sheet responsive to the stored data representative of the multicolor graphic product, and wherein said controller includes programming stored in a memory associated therewith for reading data characteristic of the donor sheet from the memory element, determining the radius of at least the take-up roll from the read data characteristic of the donor sheet, determining a desired tension to be applied to the donor sheet during printing and energizing said take up motor responsive to the radius of the take-up roll and the desired tension for applying the desired tension to the donor sheet.

174. The wide format thermal printer of claim 173 wherein said programming for reading data characteristic of the donor sheet includes programming for reading selected data for determining the desired tension to be applied to the donor sheet, and wherein said programming for determining said desired tension determines said desired tension from said selected data.

175. The wide format thermal printer of claim 173 wherein said programming for determining the radius of the take-up roll determines the radius as a function of at least 1) a known length of the donor sheet that when wound on the take-up roll causes said take-up roll to have a known radius; 2) the known radius; and 3) the length of donor sheet wound on the take-up roll, and wherein said programming for reading data characteristic of the donor sheet includes programming for reading data representative of said length of the donor sheet wound on the take-up roll.

176. The wide format thermal printer of claim 175 wherein said programming for reading data representative of the length of the donor sheet wound on the take-up roll includes programming for reading data representative of the original length of donor sheet wound on the supply roll and the length of donor sheet remaining on the supply roll.

177. The wide format thermal printer of claim 173 wherein said programming for energizing the take-up motor includes programming for energizing the take-up motor as function of a threshold energization, a known tension, a known energization and a known radius to apply the desired tension to the donor sheet, wherein said known tension is the tension applied to the donor sheet when said take-up roll has said known radius and said take-up motor is energized at said known energization.

178. The wide format thermal printer of claim 177 wherein said printer includes:

a rotation sensor coupled to the take-up motor for providing signals responsive to the rotation of the take-up motor, and wherein said controller includes programming for determining said threshold energization including programming for rotating the take-up motor in the reverse direction to create slack in the donor sheet; increasingly energizing the take-up motor for forward rotation; sensing the rotation of the take-up roll responsive to said signals from said rotation sensor and noting the threshold energization of the take-up motor, the threshold energization being that energization at which the sensor signals that the take-up roll is rotating.

179. The wide format printer of claim 173 wherein said brake includes a magnetic particle brake coupled to said first shaft for mounting the supply roll, the brake for applying a selected braking torque on the supply roll responsive to the energization of the brake by the controller, and wherein said programming for determining the radius of at least the take-up roll from the data characteristic of the donor sheet includes programming for determining the radius of the supply roll, and wherein the said programming for applying the desired tension includes programming for energizing the brake responsive to the radius of the supply roll.

180. The wide format thermal printer of claim 179 wherein said programming for determining the radius of the supply roll includes programming for determining the radius of the supply roll from data representative of the following: 1) a known length of the donor sheet that when wound on the supply roll causes said supply roll to have a known; 2) the length of donor sheet remaining on the supply roll; and 3) the known radius, and wherein

said programming for reading data characteristic of the donor sheet includes programming for reading data representative of at least one of 1)-3) above.

10

181. The wide format printer apparatus of claim 179 wherein said programming for reading data characteristic of the donor sheet includes programming for reading data representative of the following: 1) the length of the donor sheet originally wound to form the supply roll; 2) the length of donor sheet remaining on the supply roll; and 3) the original radius of the supply roll, and wherein the wherein said programming for determining the radius of the supply roll includes programming for determining the radius from said data representative of 1)-3) above.

182. The wide format thermal printer of claim 179 wherein said programming for energizing the magnetic brake includes energizing said magnetic brake as a function of a threshold energization, a known braking tension, a known energization and a known radius.

183. The wide format printer of claim 182 including a rotation sensor coupled to the take-up motor for providing signal responsive to the rotation of the take-up motor, and wherein said controller stores in a memory associated therewith programming for determining the threshold energization including programming for increasingly energizing the take-up motor for forward rotation; sensing the rotation of the take-up roll; increasingly energizing the magnetic brake; and noting the threshold energization of the magnetic brake, the threshold energization being that energization at which the sensing step determines that the take-up roll stops rotating.

184. The wide format thermal printer of claim 179 wherein said thermal printhead is translatable along a print axis transverse to the printing sheet translation axis, and wherein said thermal printer includes a first actuator for translating the thermal printhead in the direction of the print axis and a second actuator coupled to the printhead for lifting the printhead away from the printing sheet for refraining from pressing the donor sheet against the printing sheet such that donor sheet is not drawn past the printhead when translating the thermal printhead in the direction of the print axis, said first and second actuator in communication with said controller for control thereby, and wherein said controller includes programming for tracking the distance translated by the printhead in the direction of the print axis while pressing the donor sheet against the printing sheet and for storing on said memory element data representative said distance translated.

185. Vacuum workbed for supporting a sheet material to be worked upon, comprising:

a workbed having a worksurface for supporting the sheet material, the worksurface including a plurality of apertures for applying suction to the sheet material, said apertures separated into first and second zones for accommodating sheet material of different sizes and orientations;

a suction source for applying suction to the apertures;

a manifold for providing fluid communication between said suction source and said apertures for applying the suction thereto;

a sensor in fluid communication with said suction source for providing a signal responsive to the degree of vacuum drawn by said suction source on the apertures; and

wherein the flow rate through one of the zones of apertures is restricted for producing a greater than nominal degree of vacuum when said one zone includes unblocked apertures.

186. The vacuum workbed of claim 185 including a flow restriction element interposed between said one of the zones and said suction source for restricting the flow rate.

187. The vacuum workbed of claim 186 including a second flow restriction element interposed between the other of the zones and the suction source.

188. The vacuum workbed of claim 185 wherein said flow rate through said one of the zones is restricted such that adequate suction is provided through the other of said zones when said one of said zones includes unblocked apertures.

189. The vacuum workbed of claim 185 wherein said worksurface of said workbed is a flat worksurface.

190. The vacuum workbed of claim 185 wherein said worksurface of said workbed is a curved worksurface.

191. The vacuum workbed of claim 185 wherein said worksurface of said vacuum workbed is a cylindrical worksurface of a drum platen.

192. The vacuum workbed of claim 185 wherein said suction source is a mechanical evacuation pump.
193. The vacuum workbed of claim 185 including an orifice for communication with the atmosphere for providing a selected leakage to said suction source.
194. The vacuum workbed of claim 185 including a flow control valve disposed for controlling the application of suction to said zones.
195. The vacuum workbed of claim 185 wherein the flow rates through the zones are selected such that signals responsive to the degree of vacuum are produced by said sensor for determining the number of zones that include unblocked apertures.
196. The vacuum workbed of claim 185 wherein the flow rates through the zones are selected such that signals responsive to the degree of vacuum are produced by said sensor for determining the zones that include unblocked apertures.
197. The vacuum workbed of claim 185 wherein said workbed includes first and second groups of apertures, a first manifold for providing fluid communication between said suction source and said first group of apertures, and wherein said second group includes said first and second zones.
198. The vacuum workbed of claim 197 including first and second flow control valves fluidly interposed between said suction source and first and second groups of apertures, respectively.

199. Vacuum workbed for supporting a sheet material to be worked upon, comprising:

a workbed having a worksurface for supporting the sheet material, the worksurface including a plurality of apertures separated into a plurality of zones;

a suction source for applying suction to the apertures;

a first manifold for providing fluid communication between said suction source and a first group of zones;

a second manifold for providing fluid communication between said suction source and a second group of zones, said first and second groups including at least one zone each;

a sensor in fluid communication with said suction source for providing a signal responsive to the degree of vacuum drawn by said suction source on the apertures;

a first flow control valve fluidly interposed between said first group and said suction source;

a second flow control valve fluidly interposed between said second group and said suction source; and

wherein said first flow control valve is fluidly interposed between said second flow control valve and said suction source.

200. The vacuum workbed of claim 199 wherein said second group includes two zones of apertures, and wherein said flow rate through one of said two zones of apertures is restricted for producing a greater than nominal degree of vacuum when said one zone includes unblocked apertures.

201. The vacuum workbed of claim 200 including a flow restriction element interposed between said one of said two zones and said suction source for providing the restriction of the flow rate.

202. The vacuum workbed of claim 200 including a second flow restriction element interposed between said first zone of said second group and said suction source for restricting the flow rate through said first zone of said second group.

203. The vacuum workbed of claim 199 wherein said first group includes first and second zones, said second group includes third, fourth and fifth zones, and wherein said workbed includes first and second flow restriction elements interposed between the first and second zones, respectively, and the suction source, and third, fourth and fifth
5 flow restriction elements, interposed, respectively, between the third, fourth and fifth zones and said suction source said flow restriction element for providing a selected flow rate through said zones of apertures when unblocked.

204. The vacuum workbed of claim 203 wherein the fourth flow restriction element is interposed between both said fourth and fifth zones and said suction source.

205. The vacuum workbed of claim 199 wherein said zones are arranged in a linear array.

206. The vacuum workbed of claim 199 wherein said worksurface of said workbed is a worksurface.

207. The vacuum workbed of claim 199 wherein said worksurface of said workbed is a curved worksurface.

208. The vacuum workbed of claim 199 wherein said worksurface of said vacuum workbed is a cylindrical worksurface of a drum platen.

209. The vacuum workbed of claim 199 wherein said suction source is a mechanical evacuation pump.

210. The vacuum workbed of claim 199 including an orifice in communication with the atmosphere for providing a selected fluid leakage to said suction source.

211. A method of automatically determining the size or orientation of a sheet material supported by a workbed having suction apertures therein, comprising the steps of:

(a) grouping the apertures into N groups of apertures;

(b) applying suction to one of the groups of apertures;

(c) incrementing the number of groups to which suction is applied by applying suction to an additional group and sensing the difference in the degree of vacuum attained between the application of suction prior to and subsequent to incrementing the number of groups;

(d) determining from the difference whether the additional group includes unblocked apertures; and

when determining in the prior step that the additional group does not include unblocked apertures, repeating steps (c) and (d) until one of: a determination is made in step (d) that the additional group does include unblocked apertures; and no groups remain.

212. The method according to claim 211 including ceasing the application of suction to an additional group determined to include unblocked apertures.

213. The method of claim 211 wherein the step of determining includes determining that substantially all the apertures of the additional group are unblocked, steps c and d being are repeated until such a determination is made in step (d).

214. The method of claim 211 including the step of organizing the apertures into M zones, where M is greater than N, such that at least one group includes more than one zone, and wherein the rate of flow through the one zone is restricted such that application of suction to the group having the one zone unblocked allows sufficient suction to be drawn on the blocked apertures of the workbed for securing the work piece to the workbed for the performance of the work operations thereon.

215. The method of claim 211 including the step of organizing the apertures into M zones, where M is greater than N, such that at least one group includes more than one zone,

5 restricting the rate of flow through selected zones of the at least one group such that the degree of vacuum attained when applying suction to the group is indicative of the number of zones of the one group having unblocked apertures; and

10 determining from the degree of vacuum attained the number of zones of the one group having unblocked apertures.

216. A method of supporting sheet materials of varying sizes for performing work operations thereon, comprising the steps of:

 providing a workbed having a worksurface for supporting the sheet material, the worksurface including first and second groups of apertures;

5 applying suction to the apertures;

10 sensing a selected number of times the degree(s) of vacuum attained during the step of applying suction and providing a selected number of signals responsive to the degree(s) of vacuum; and

15 determining from the selected number of signals one of the following: that all apertures are blocked; that a first group of apertures is blocked and a second group of apertures includes unblocked apertures; and that both first and second groups of apertures include unblocked apertures.

217. The method of claim 216 wherein the step of applying suction includes the step of applying suction to the first group of apertures only and the step of applying suction to both groups of apertures;

5 wherein the step of sensing includes the steps of sensing a degree of vacuum attained in the applying of suction to the first group of apertures and sensing the degree of vacuum attained in the applying of suction to both groups of apertures and providing first and second signals responsive thereto, respectively; and

10 wherein the step of determining includes determining the difference between the first and second signal

218. The method of claim 217 wherein the step of applying suction includes:

providing a suction source;

5 providing a first manifold for providing fluid communication between said first group of apertures and the suction source;

providing a second manifold for providing fluid communication between the second group of apertures and the suction source; and

10 providing first and second flow control valves interposed between the suction source and the first and second groups, respectively, for controlling the application of suction to the apertures.

219. The method of claim 218 wherein the step of providing flow control valves includes fluidly interposing the first flow control valve between the suction source and the second flow control valve.

220. The method of claim 216 wherein the step of determining includes determining a selected difference between the first and second signal for indicating that the second group of apertures is not blocked by the sheet material; and further including the step of:

5 applying suction to first group of apertures only.

221. The method of claim 216 wherein the step of providing a workbed having a worksurface includes providing a workbed having worksurface.

222. The method of claim 216 wherein the step of providing a workbed having a worksurface includes the step of providing a workbed having a curved worksurface.

223. The method of claim 216 wherein the step of providing a workbed having a worksurface includes the step of providing a workbed having a cylindrical worksurface.

224. The method of claim 216 wherein the step of providing a workbed includes providing a workbed having first and second groups of apertures wherein a selected group includes a plurality of zones of apertures, and including the step of:

5 restricting the rate of flow through at least one of the zones of apertures such that a signal is produced by the sensor, when suction is applied to the selected group, responsive to the degree of vacuum attained for distinguishing between when one of the zones of the selected group includes unblocked apertures and when both of the zones of the selected group include unblocked apertures.


10


225. The method of claim 224 including the step of:

 restricting the rate of flow through selected zones of the second group of apertures such that, when the first group of apertures is blocked and suction is applied to the second group of apertures, the signal produced by the sensor is responsive to the
5 number of the zones of the second group including unblocked apertures.

226. The method of claim 216 wherein the step of providing a workbed includes providing a workbed wherein the first group of apertures includes first and second zones and wherein the step of applying suction includes applying suction to the first zone via a first flow restriction element for reducing the flow through the first zone and applying
5 suction to the second zone via a second flow restriction element for reducing the flow through the apertures of the second zone.

1/45

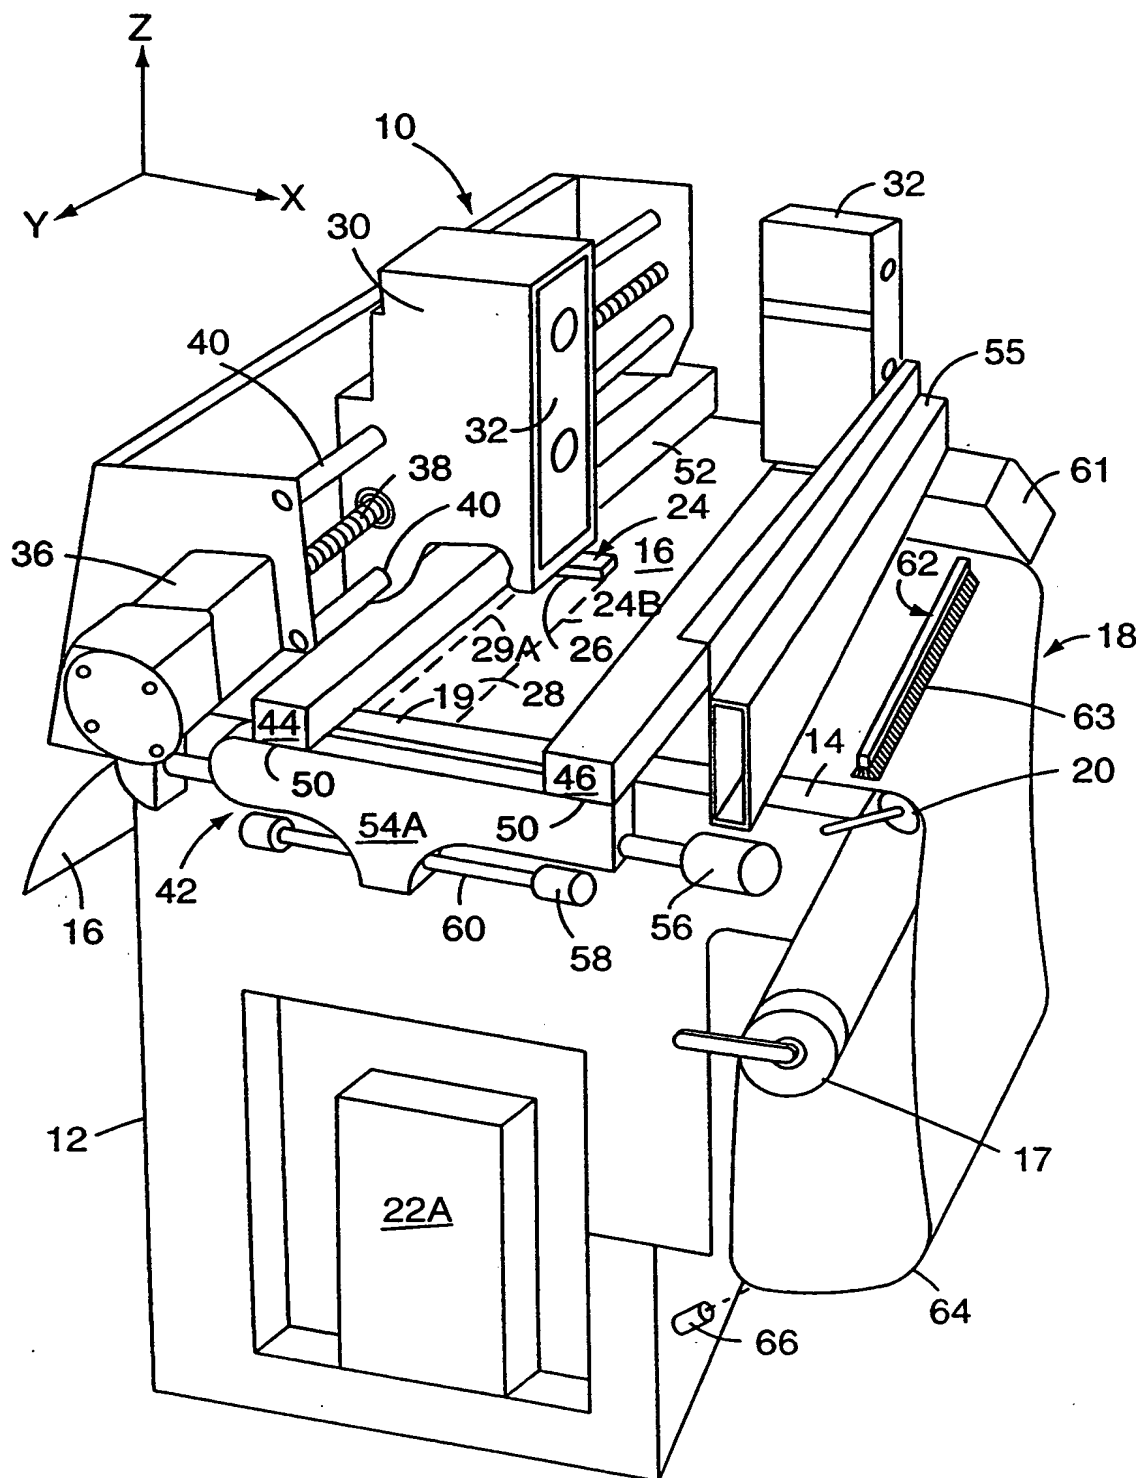

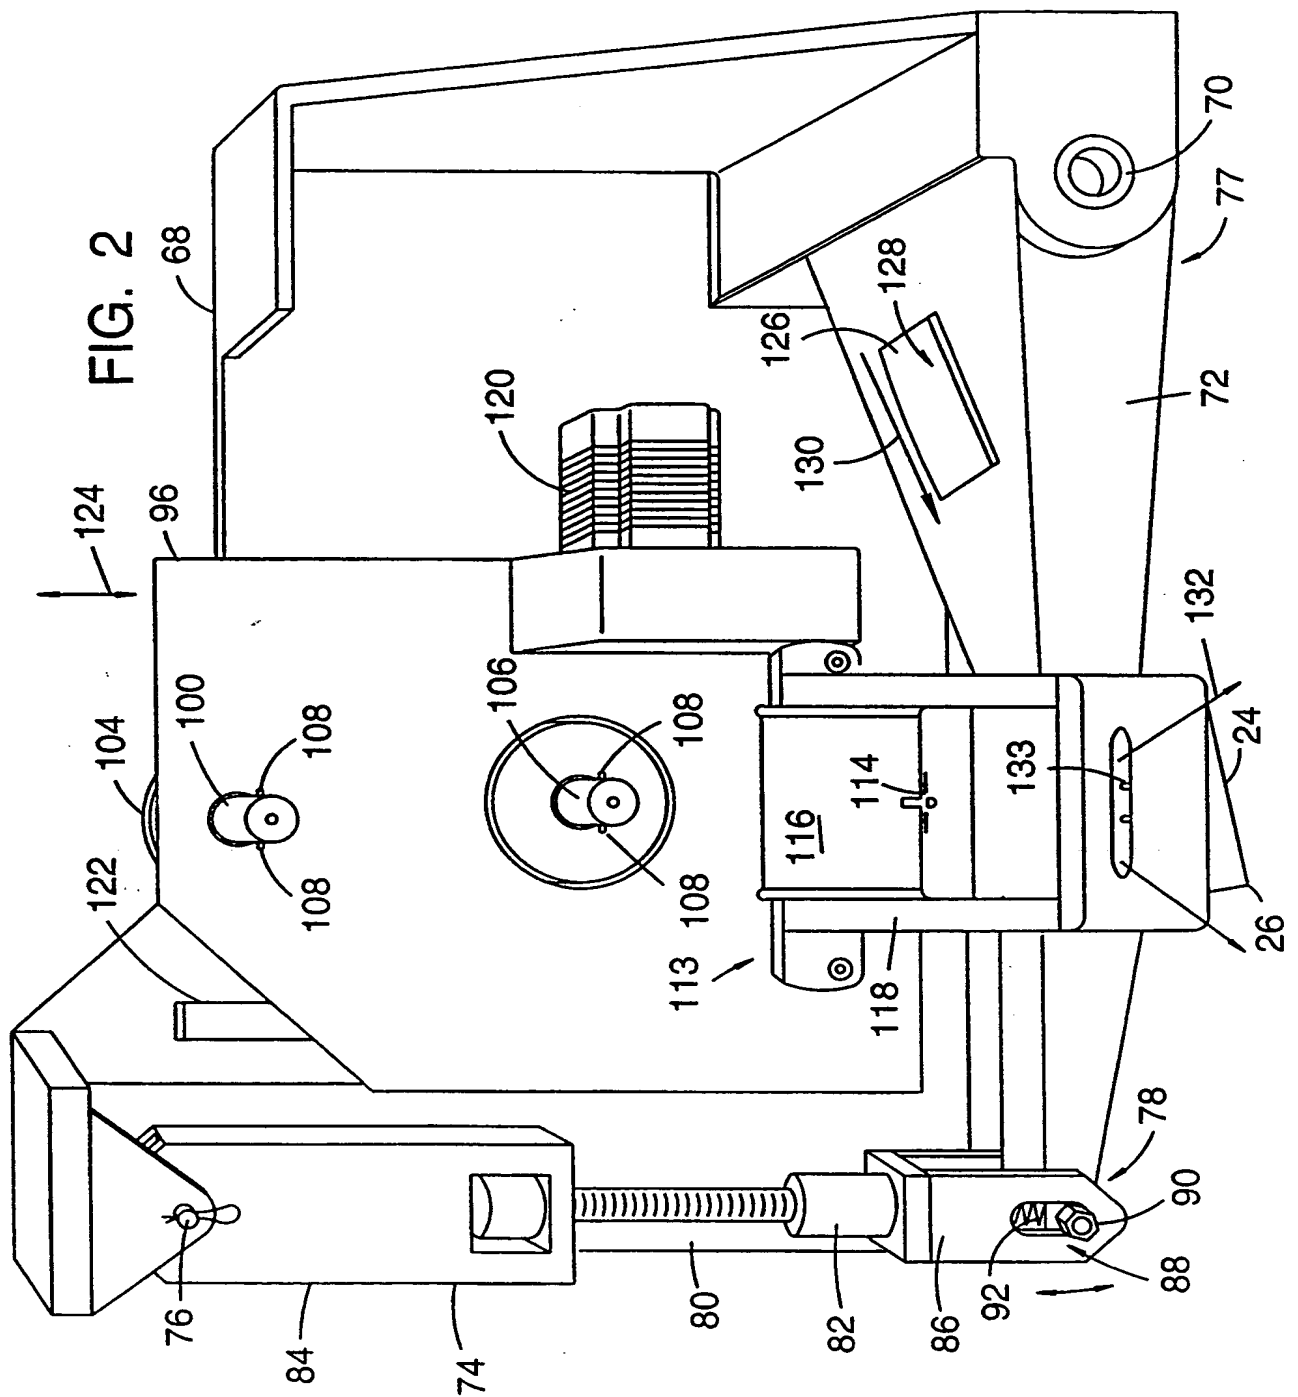

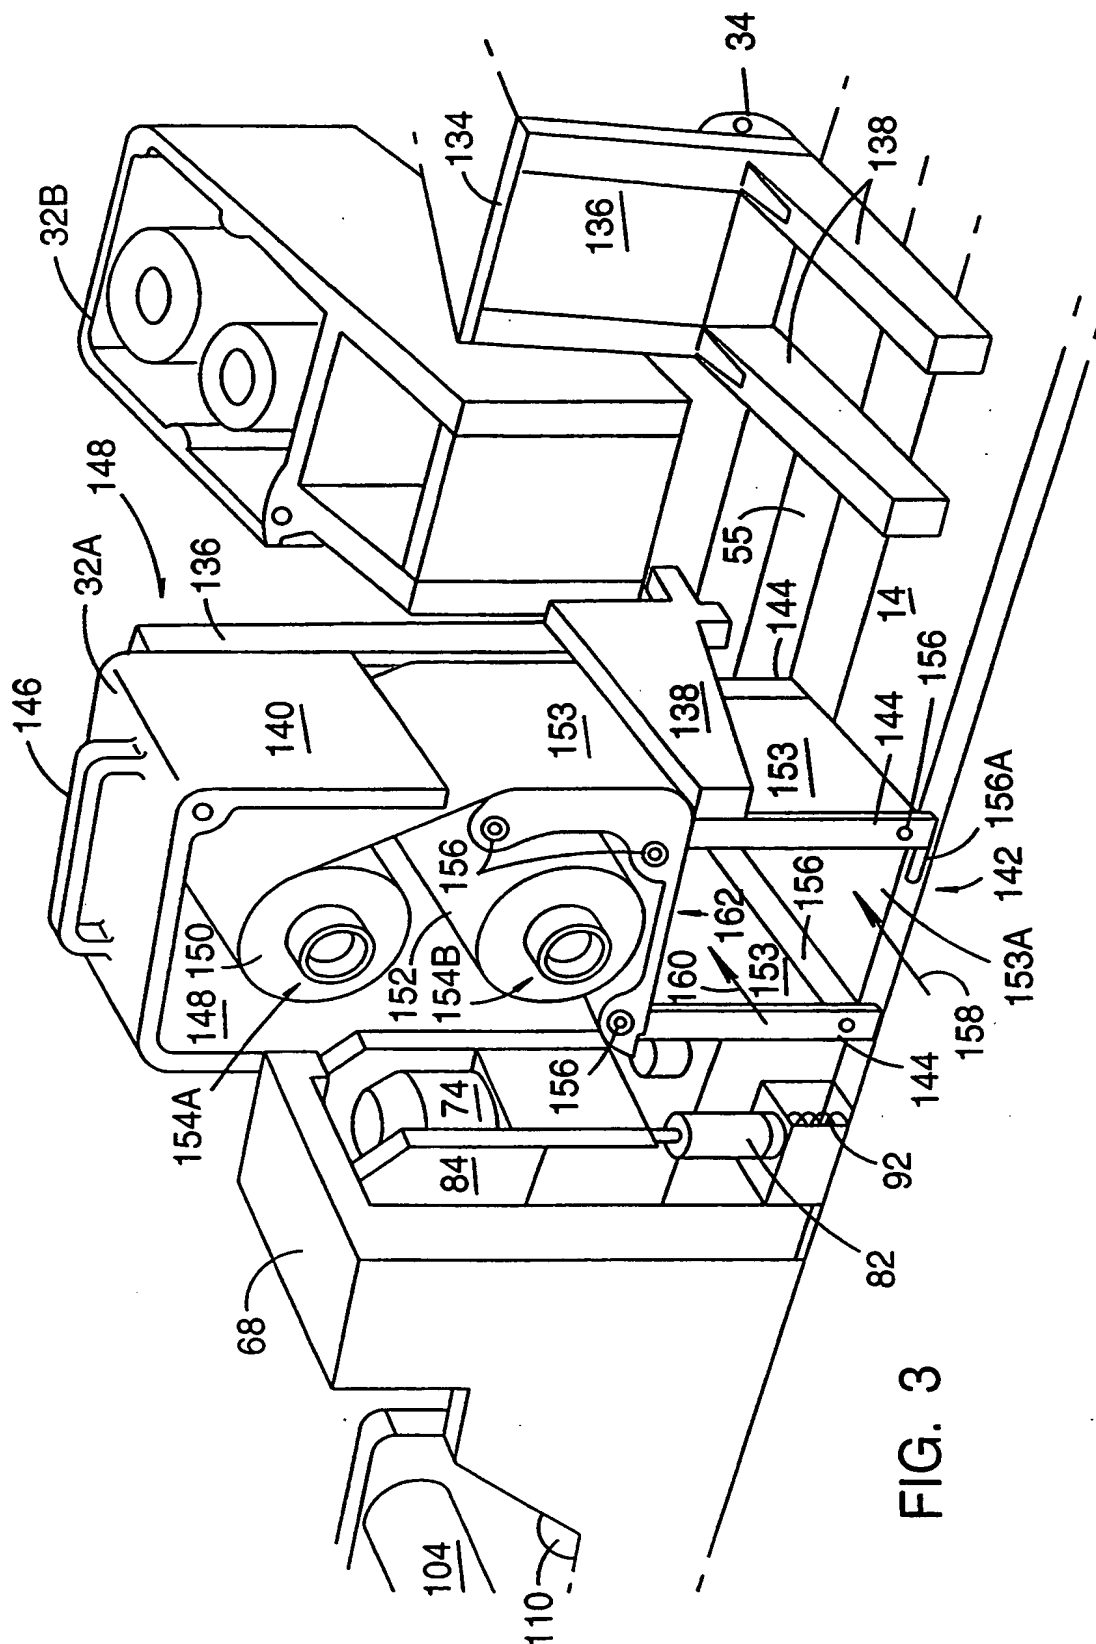
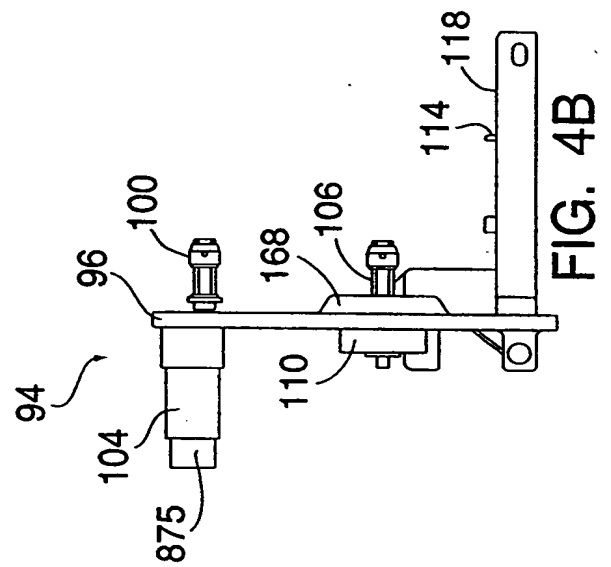
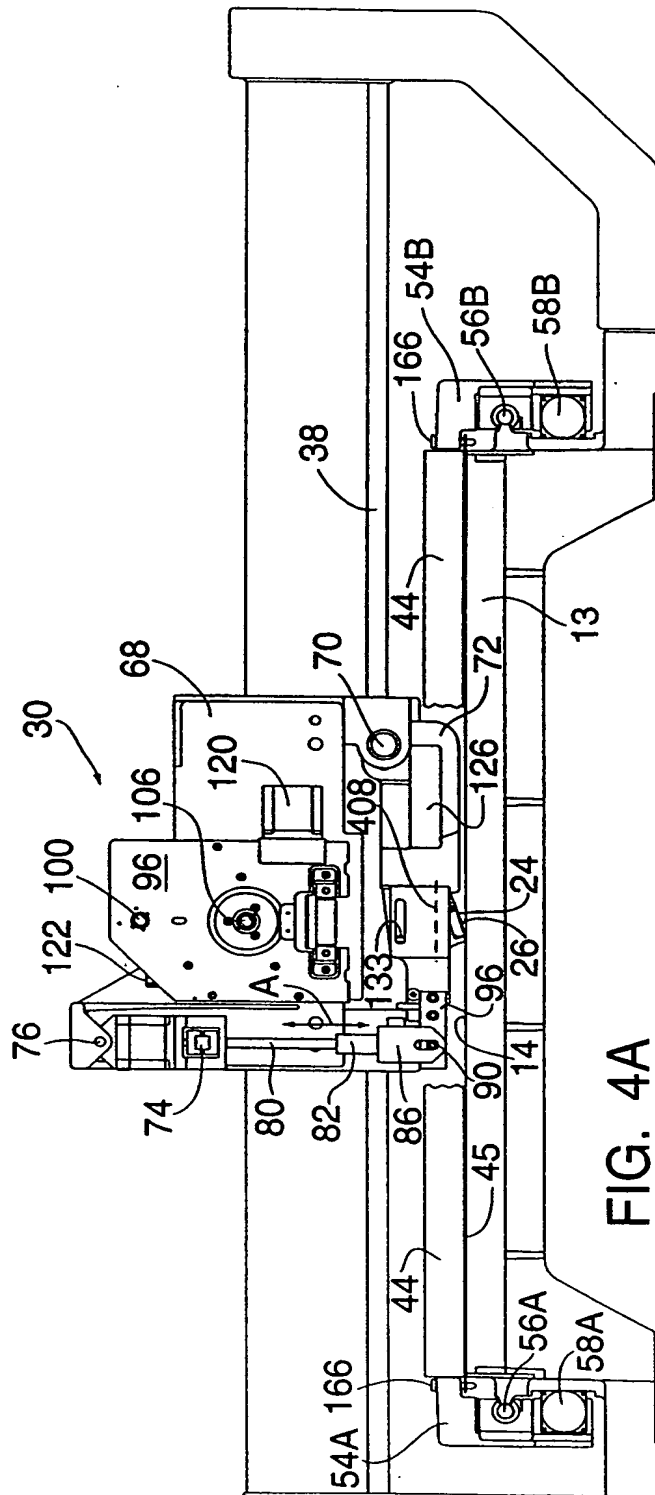


FIG. 3



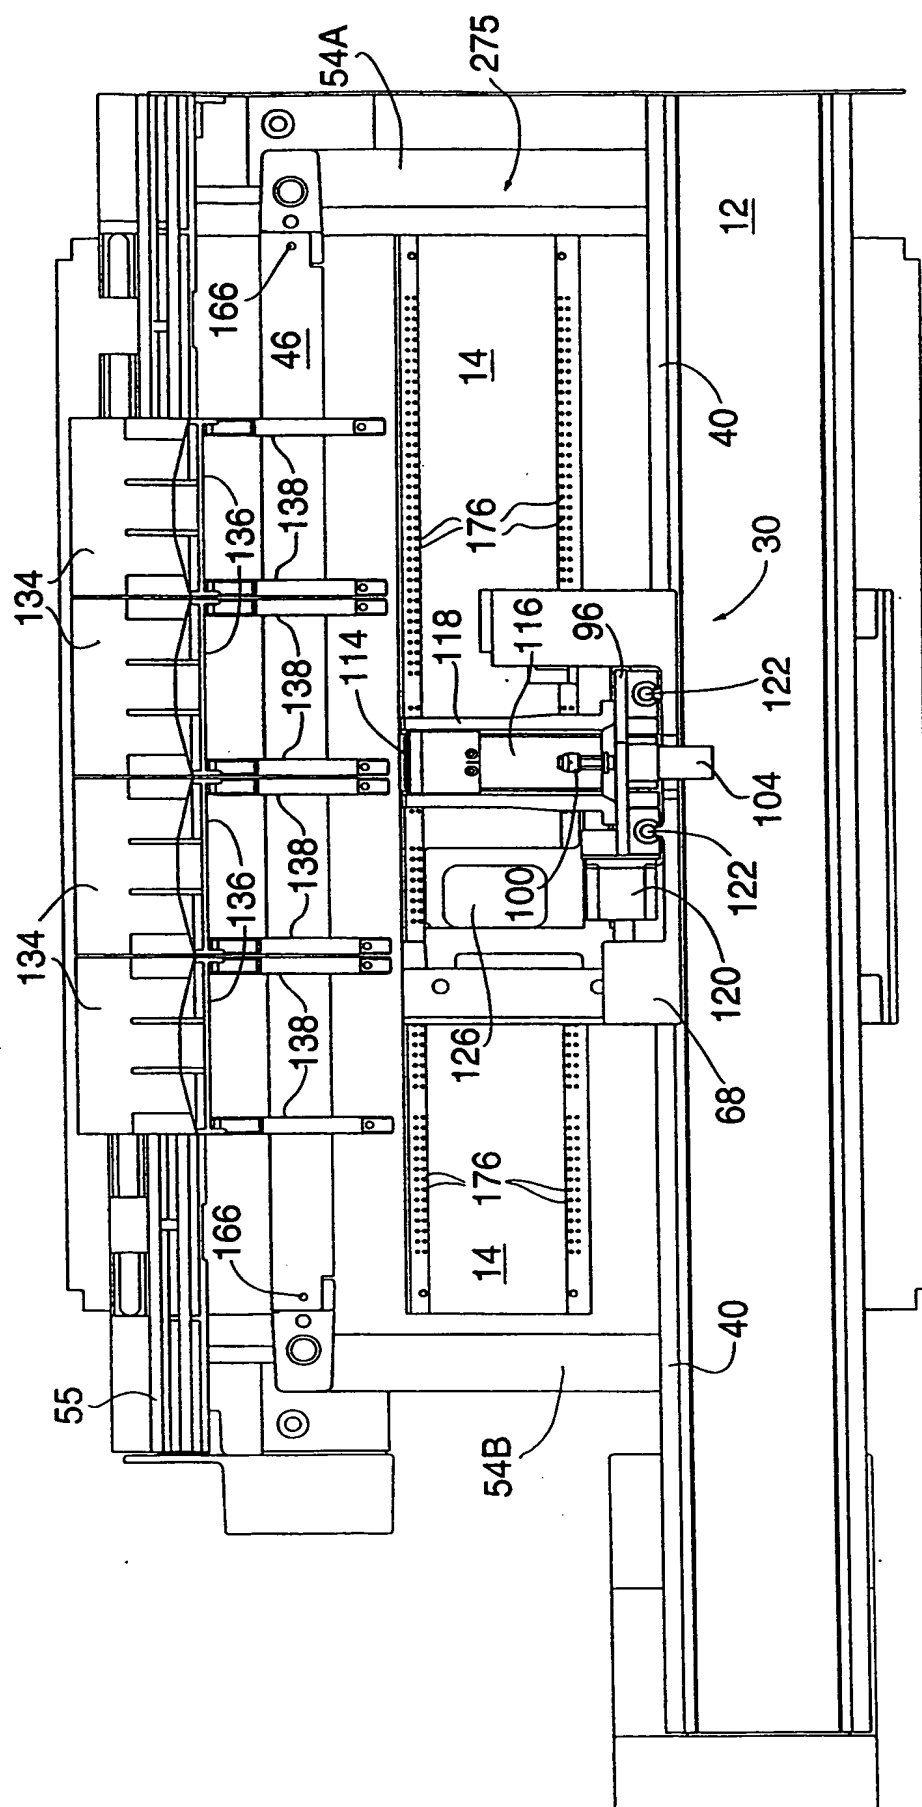


Fig. 5

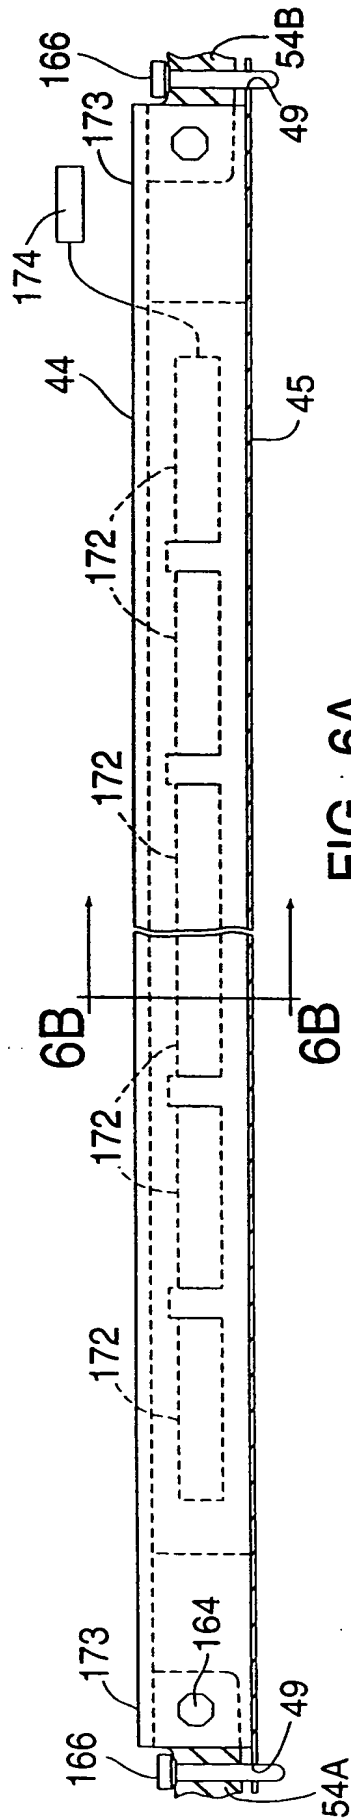


FIG. 6A

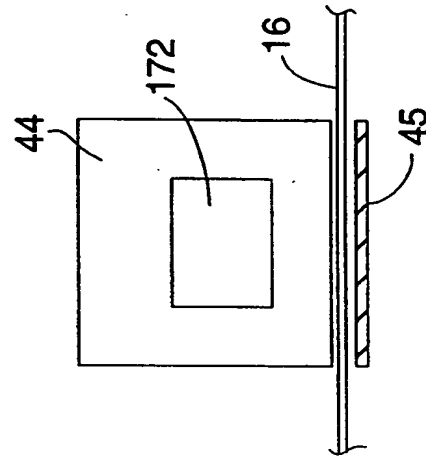


FIG. 6B

7/45

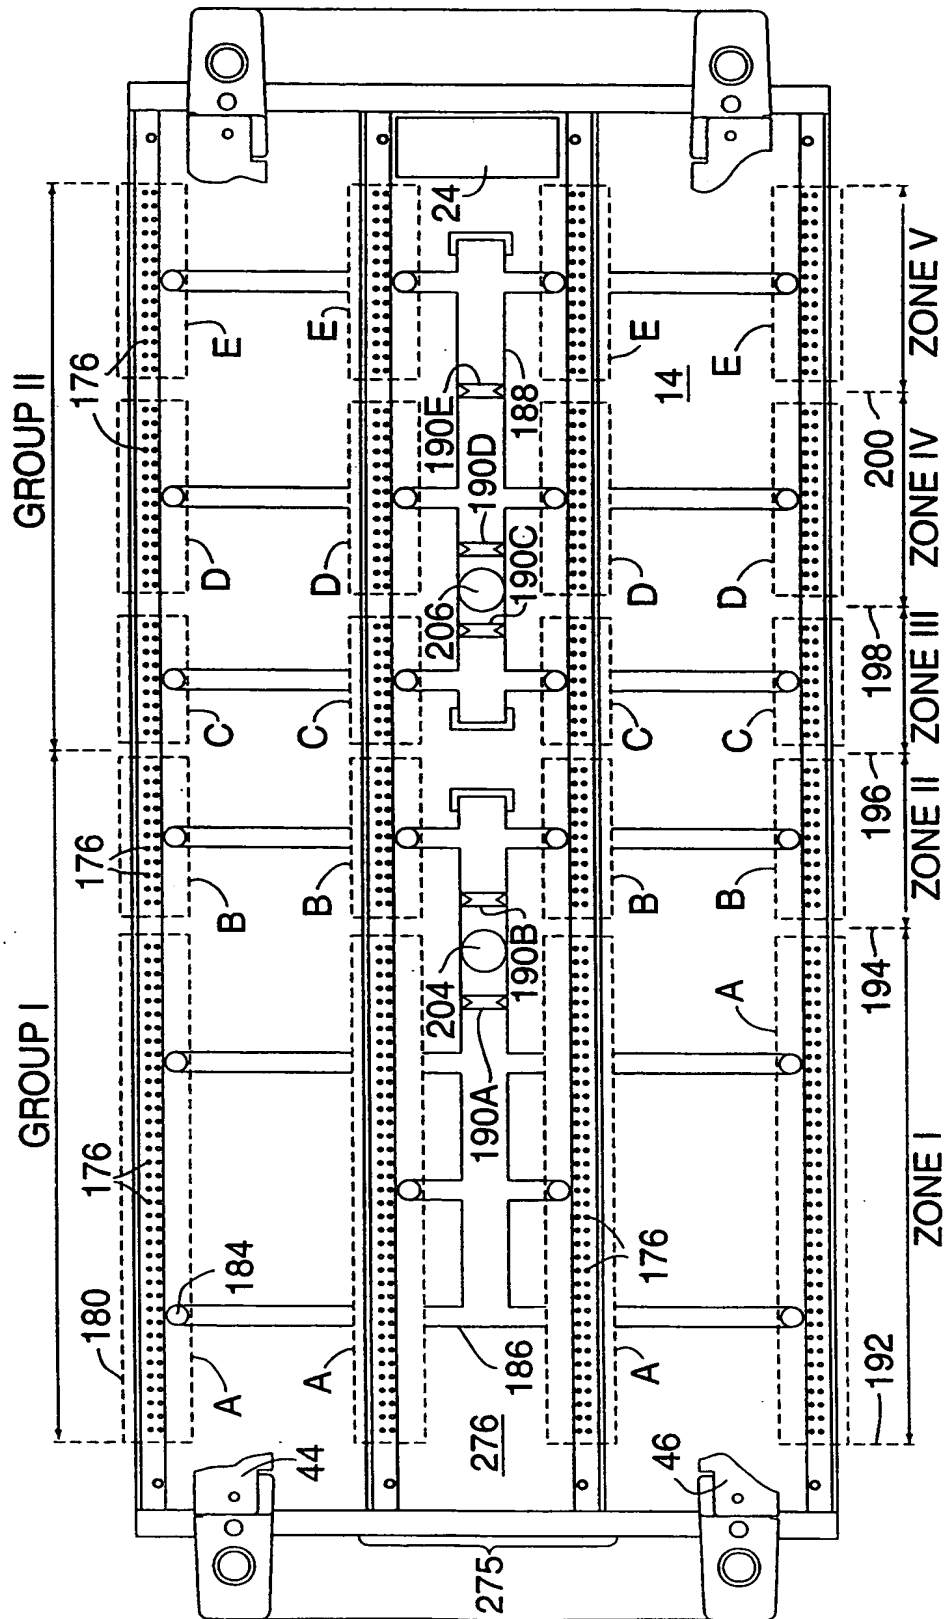


FIG. 7

8/45

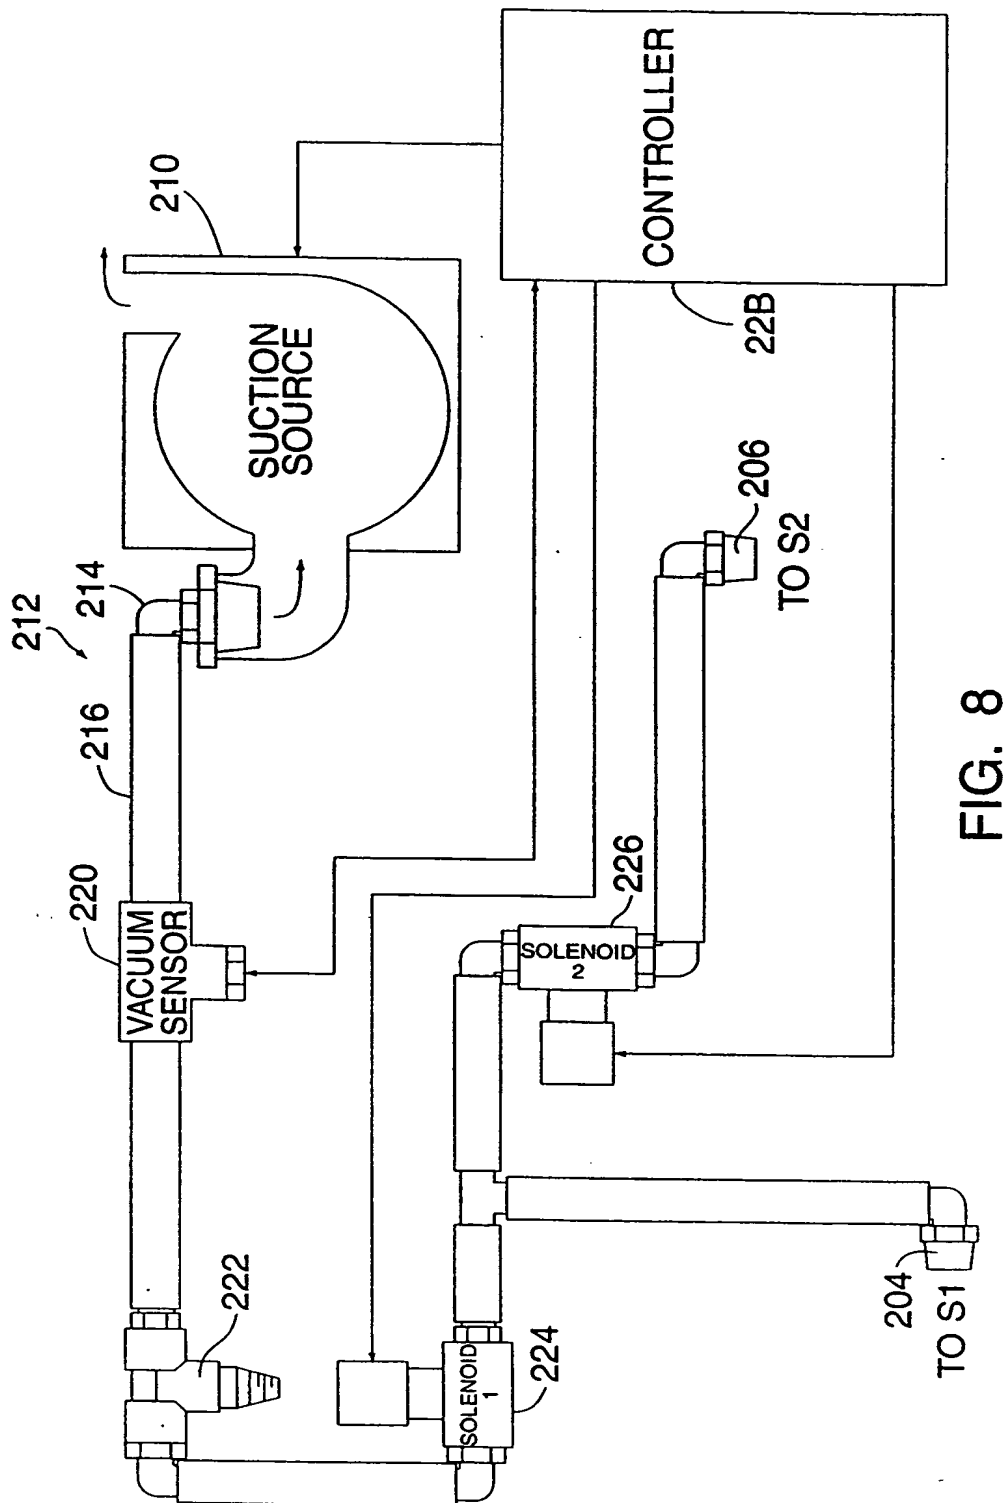


FIG. 8

9/45

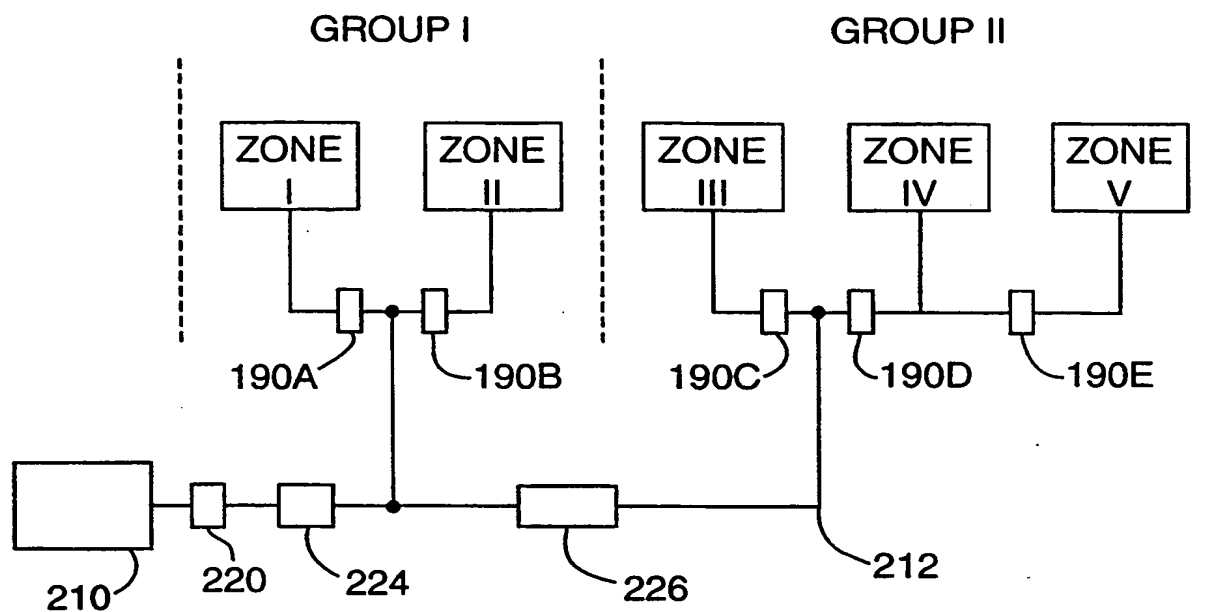


FIG. 9A

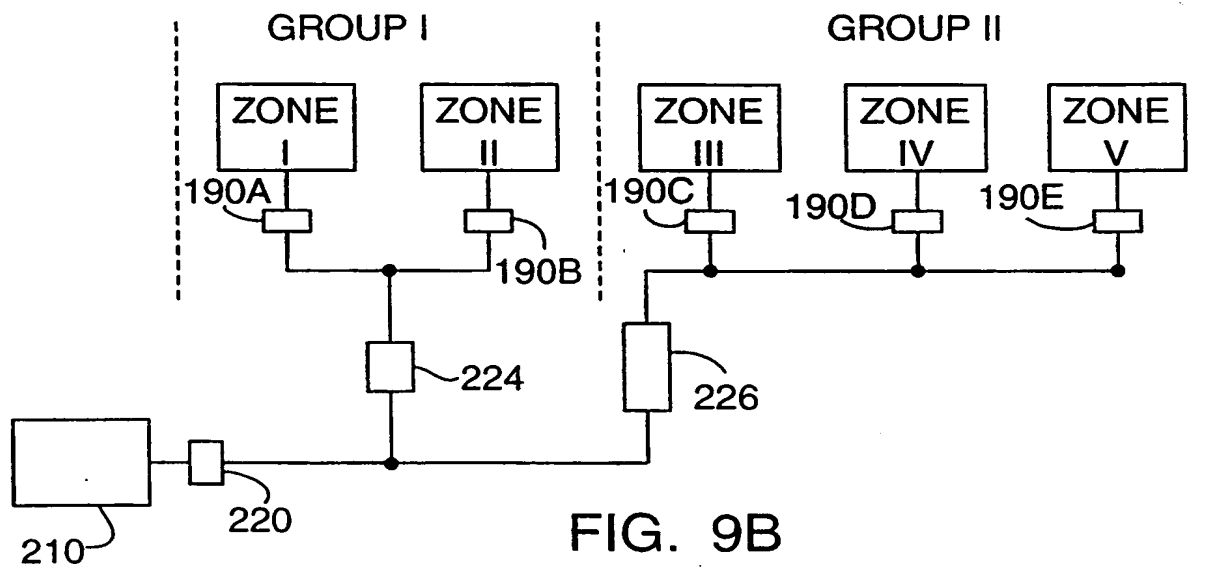
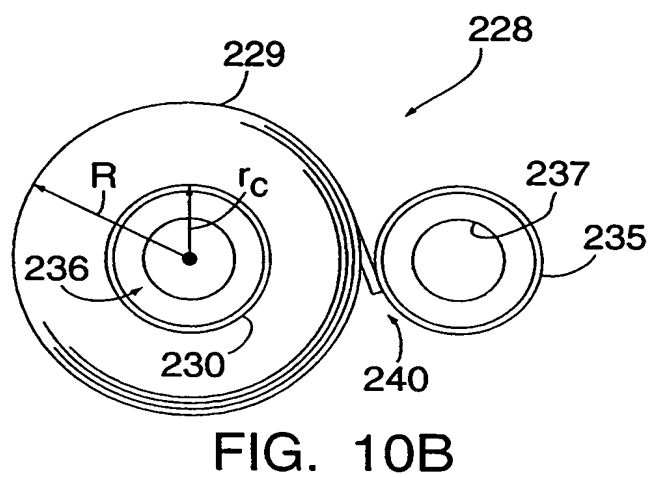
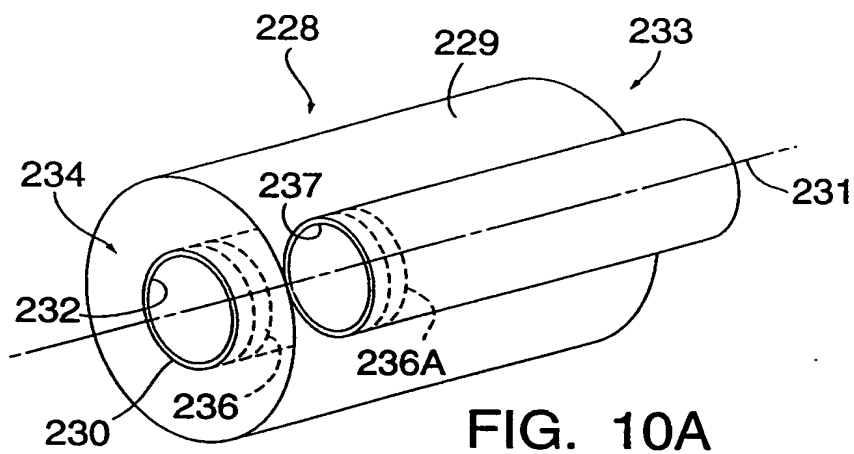


FIG. 9B

10/45



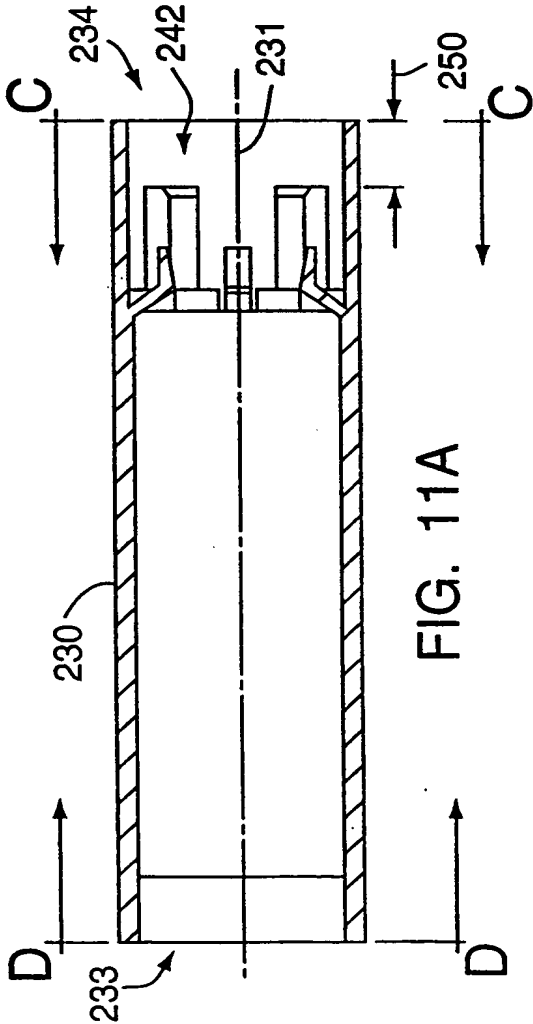


FIG. 11A

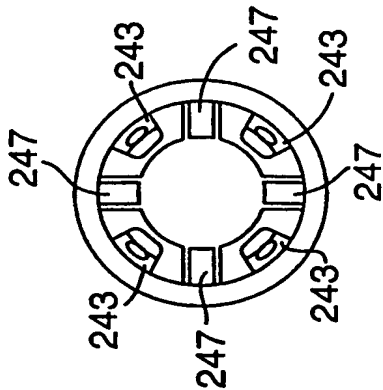


FIG. 11C

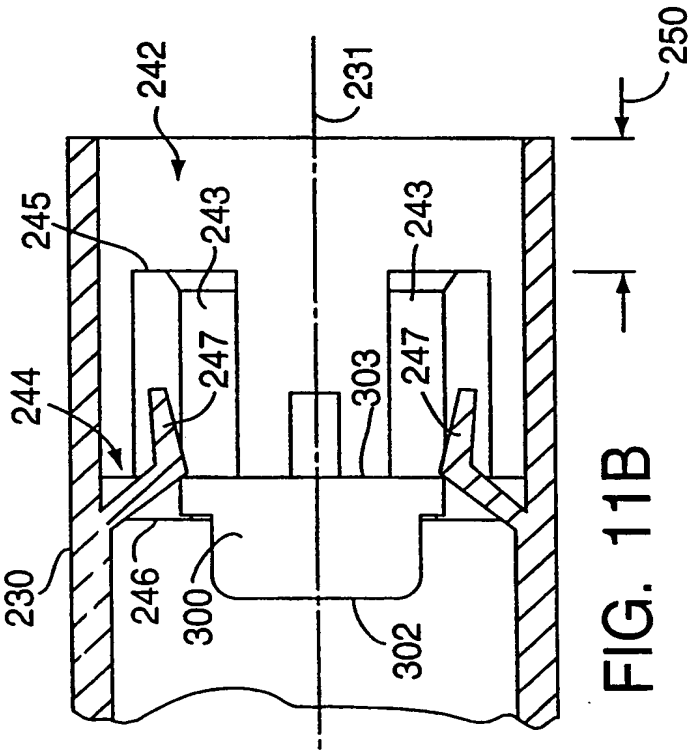


FIG. 11B

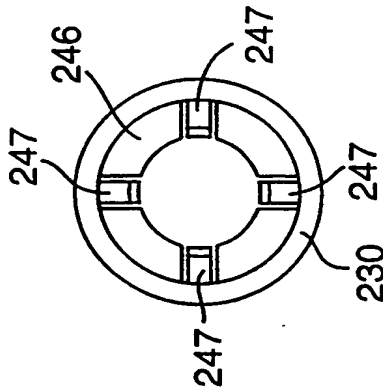


FIG. 11D

13/45

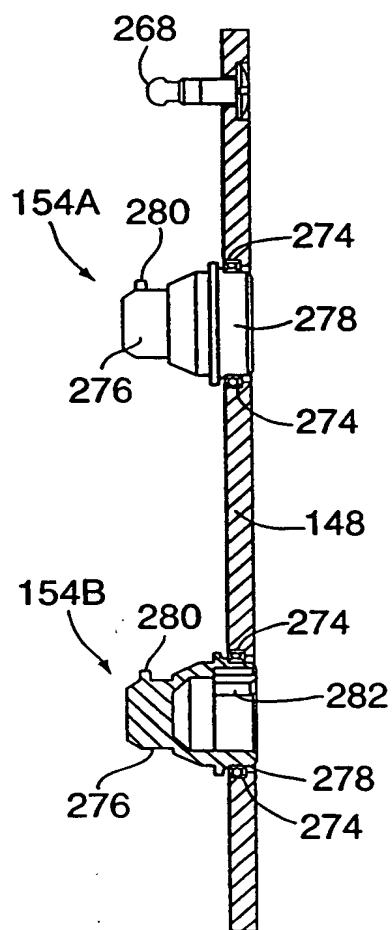


FIG. 13B

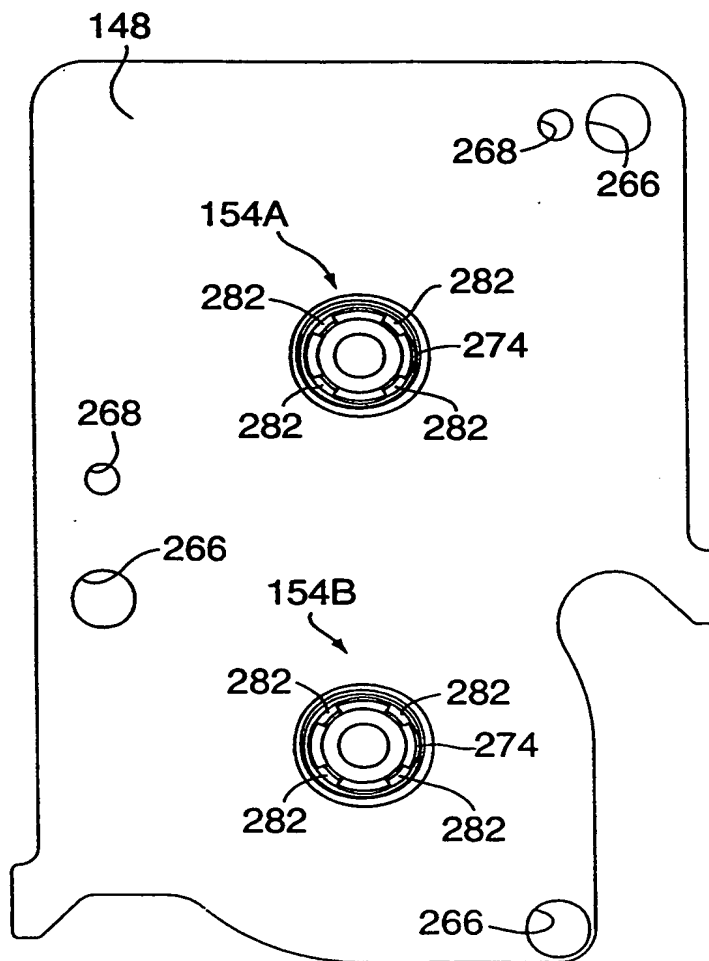


FIG. 13A

14/45


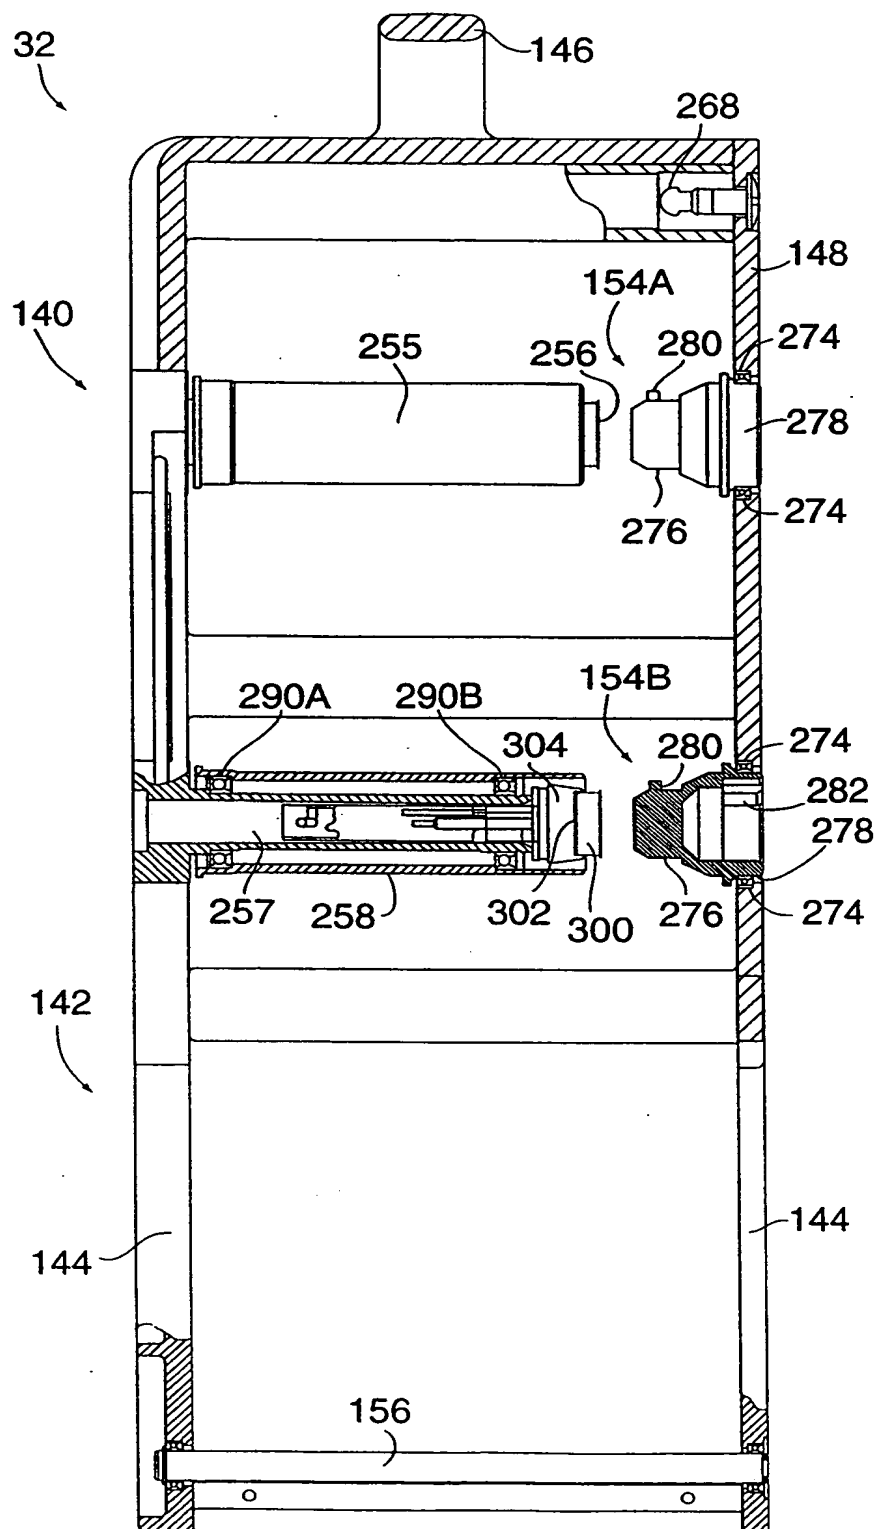


FIG. 14

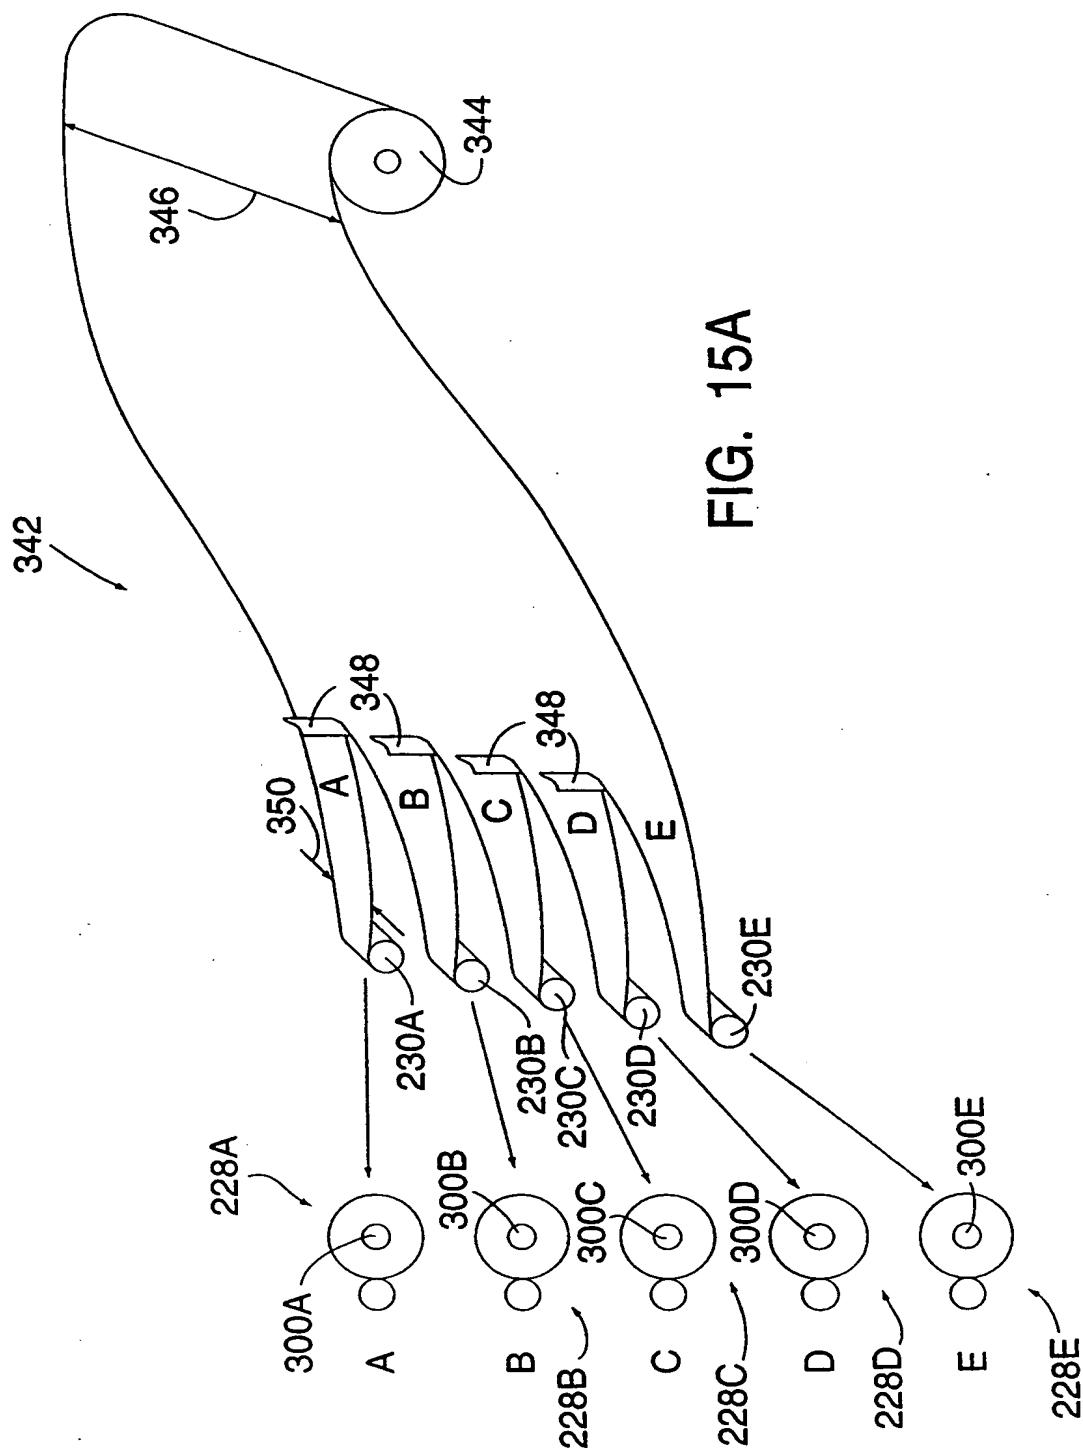

16/45




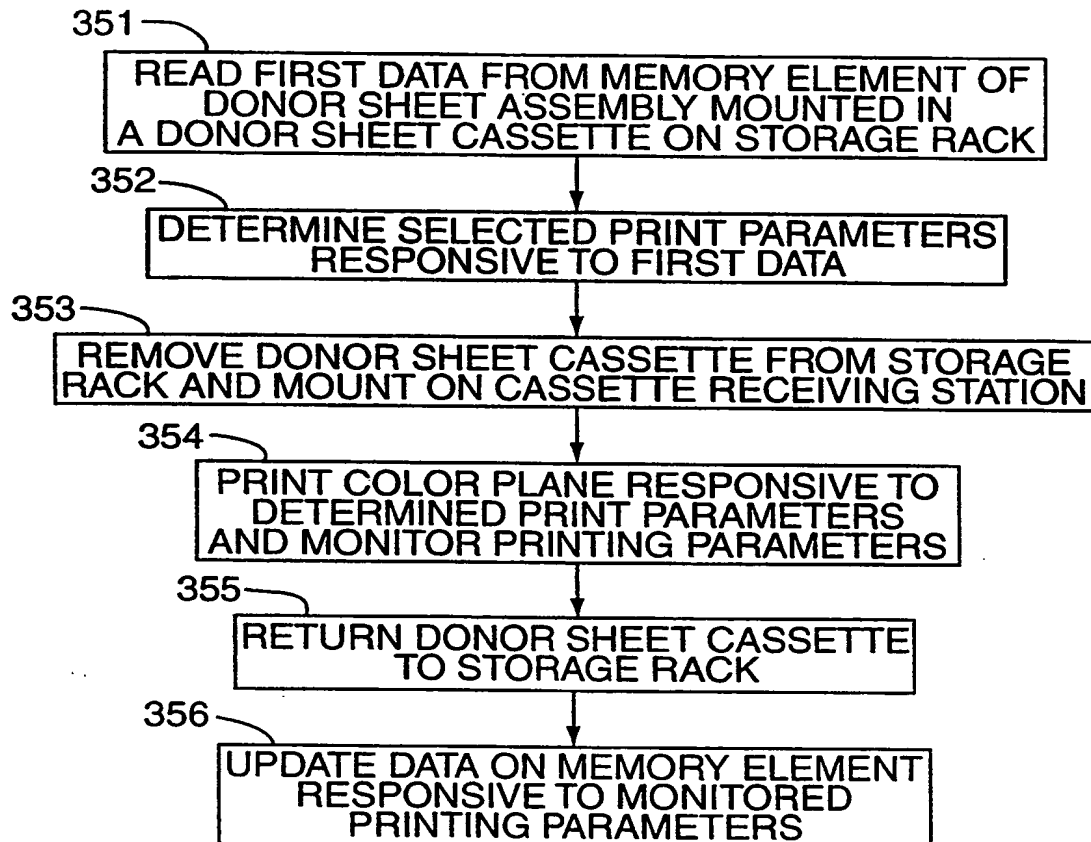


FIG. 15B

17/45

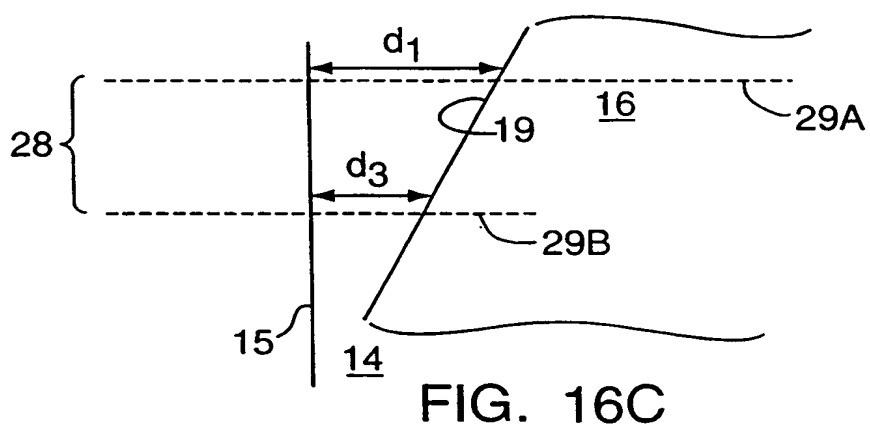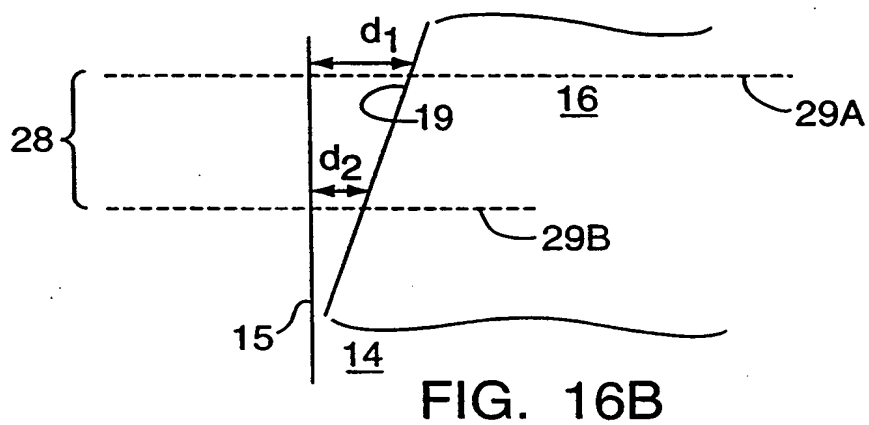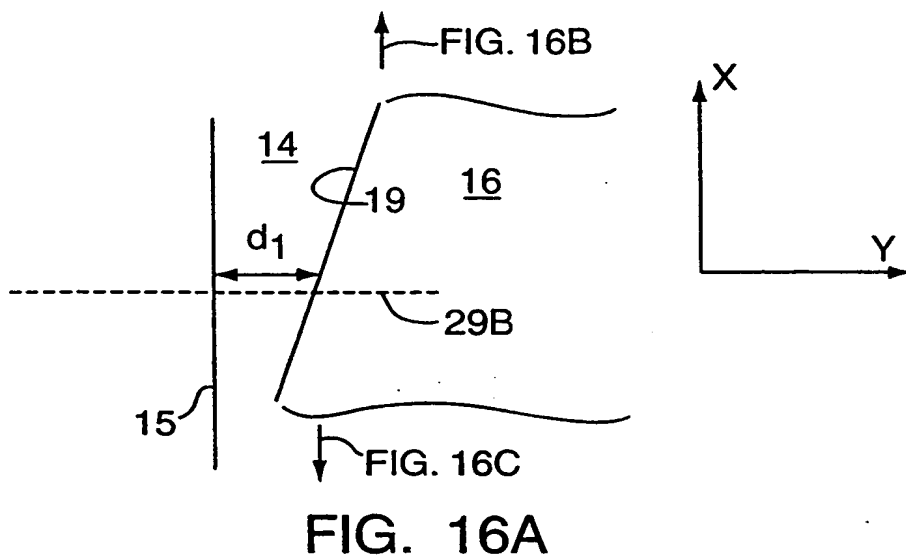

18/45

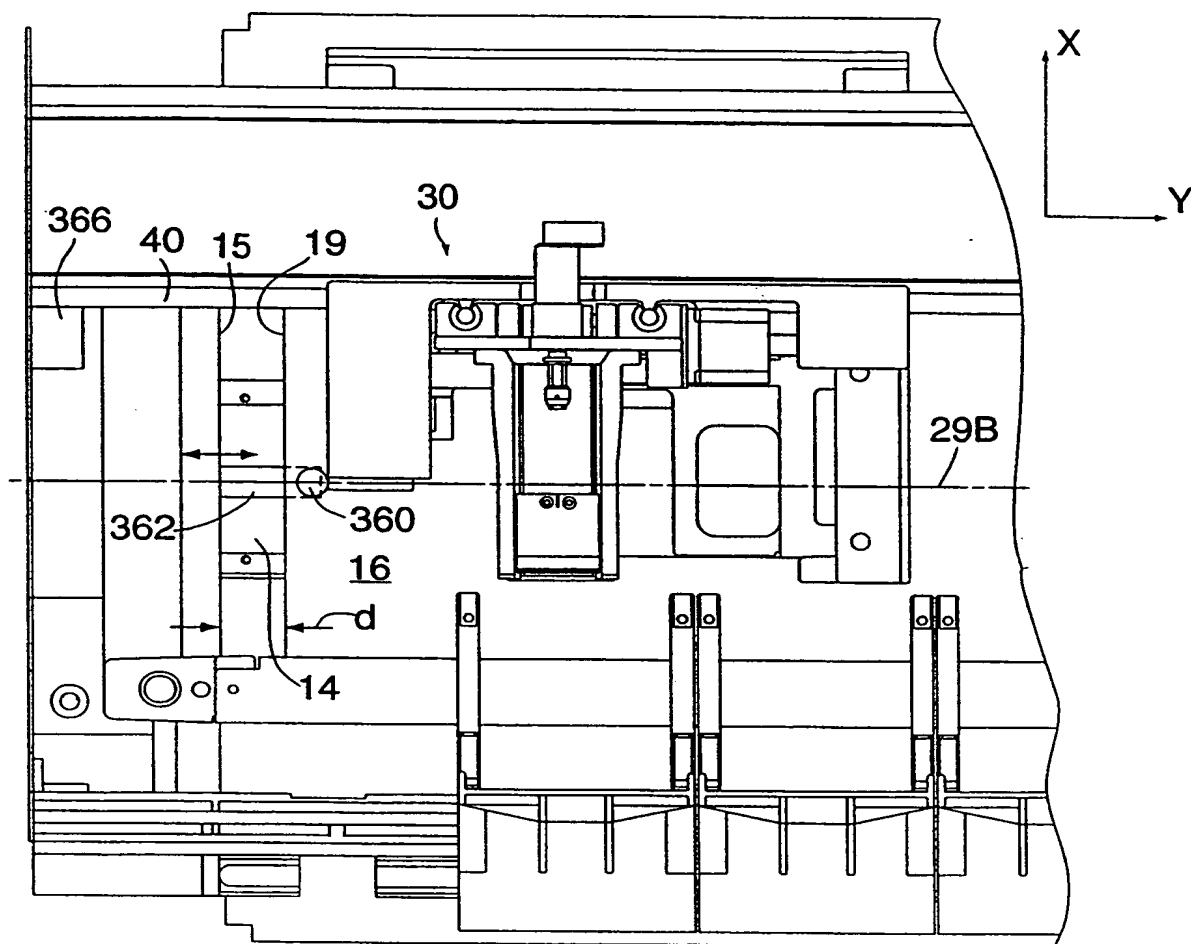
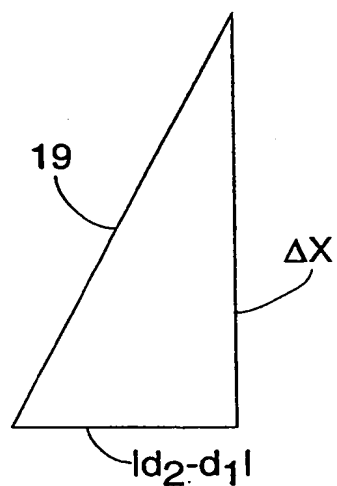
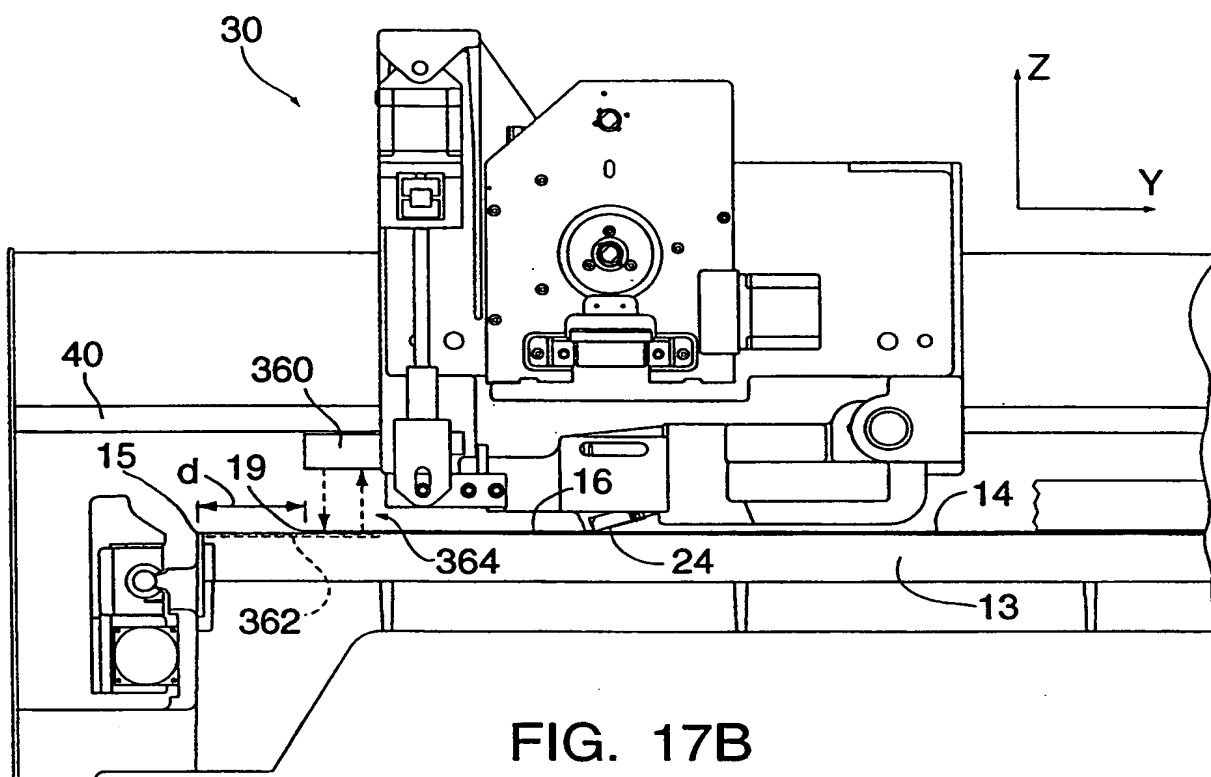


FIG. 17A

19/45



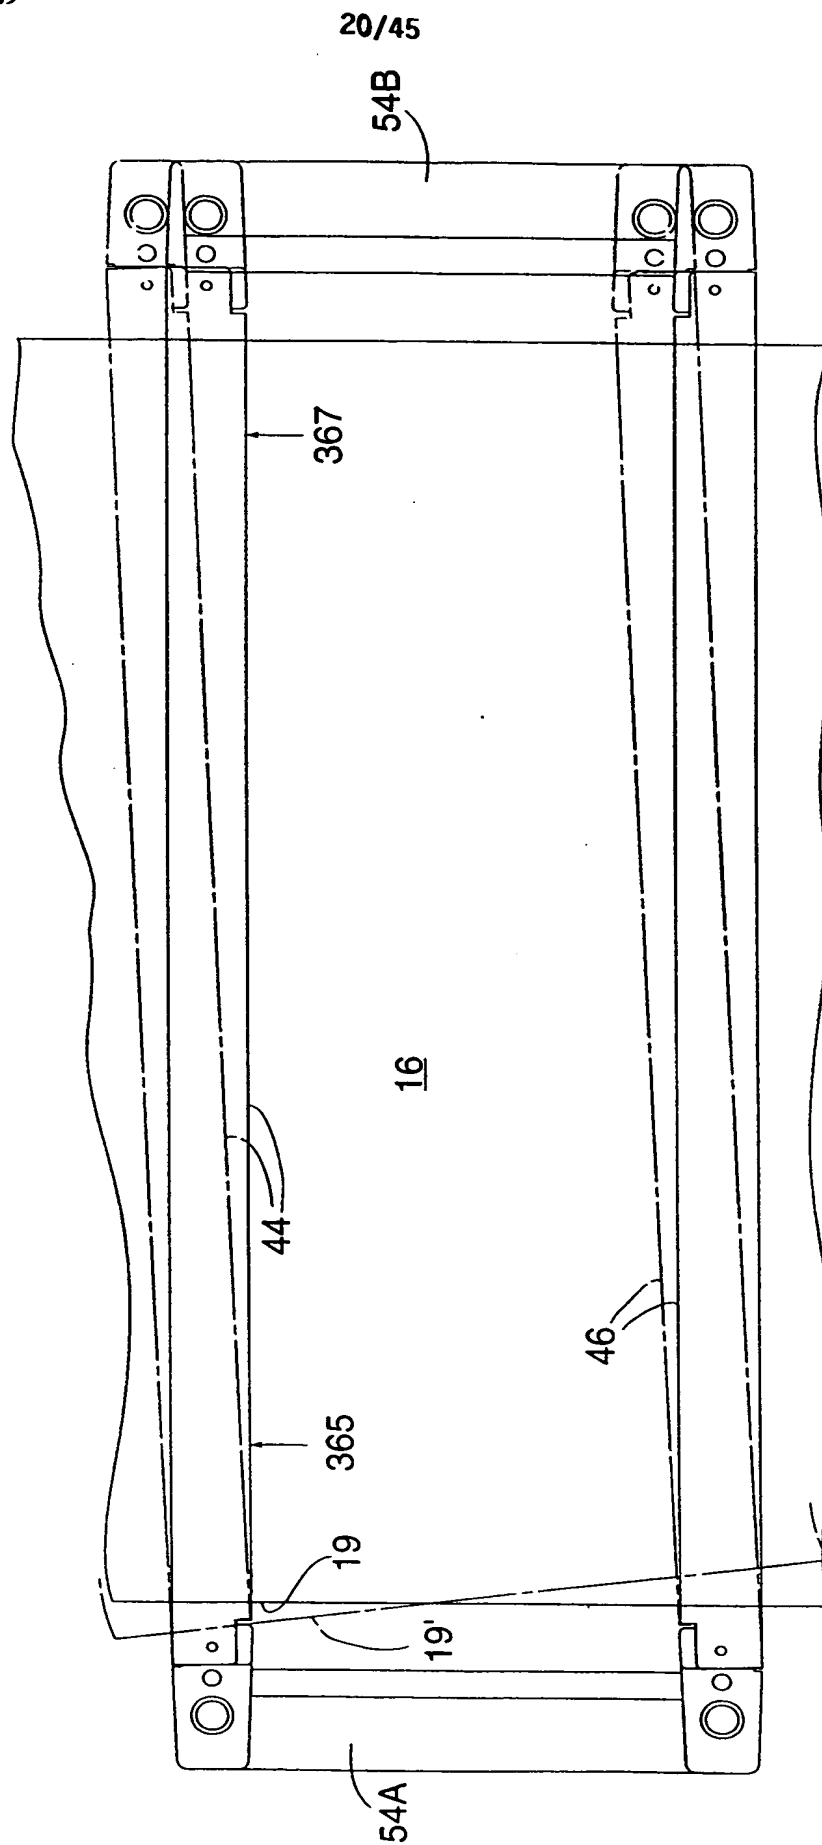
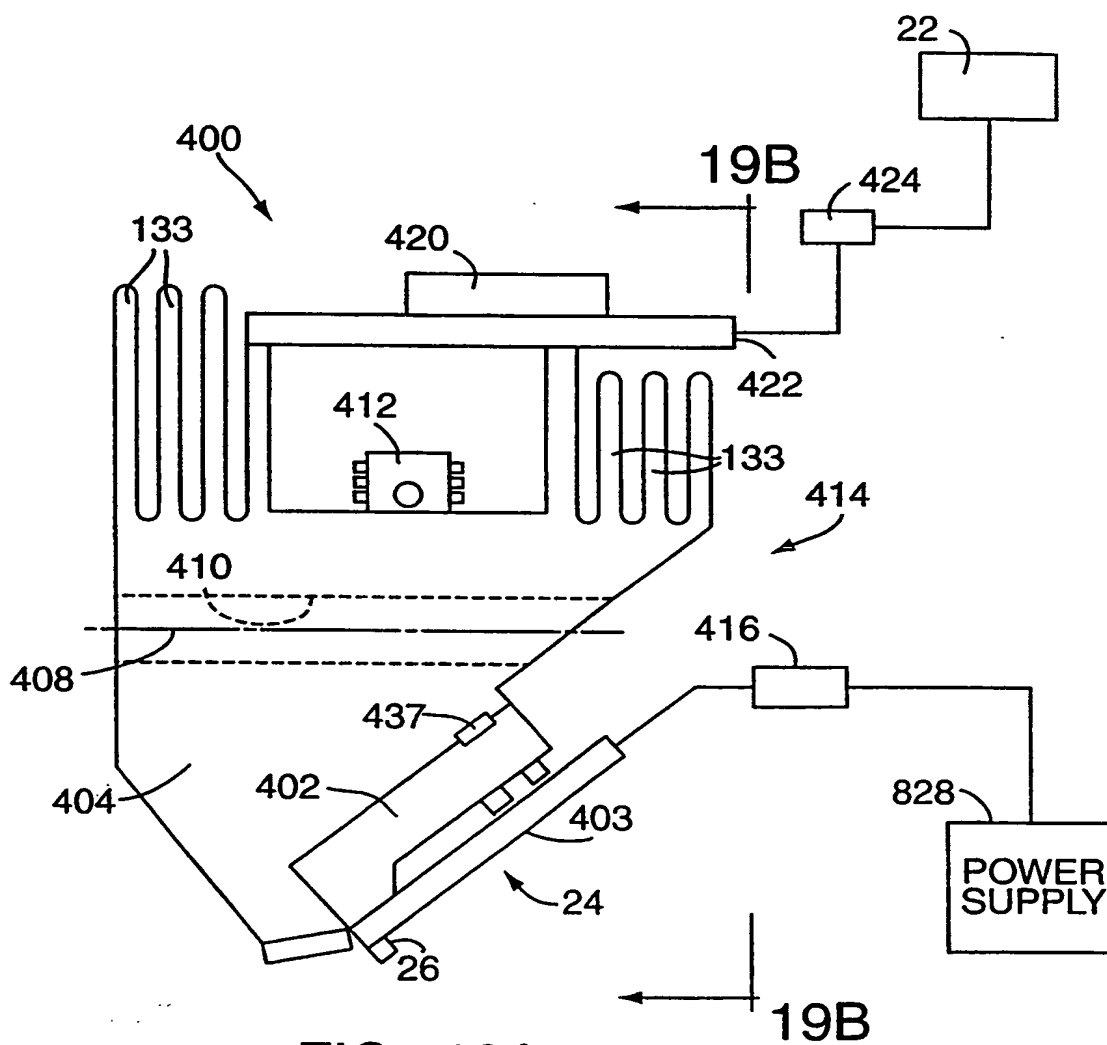
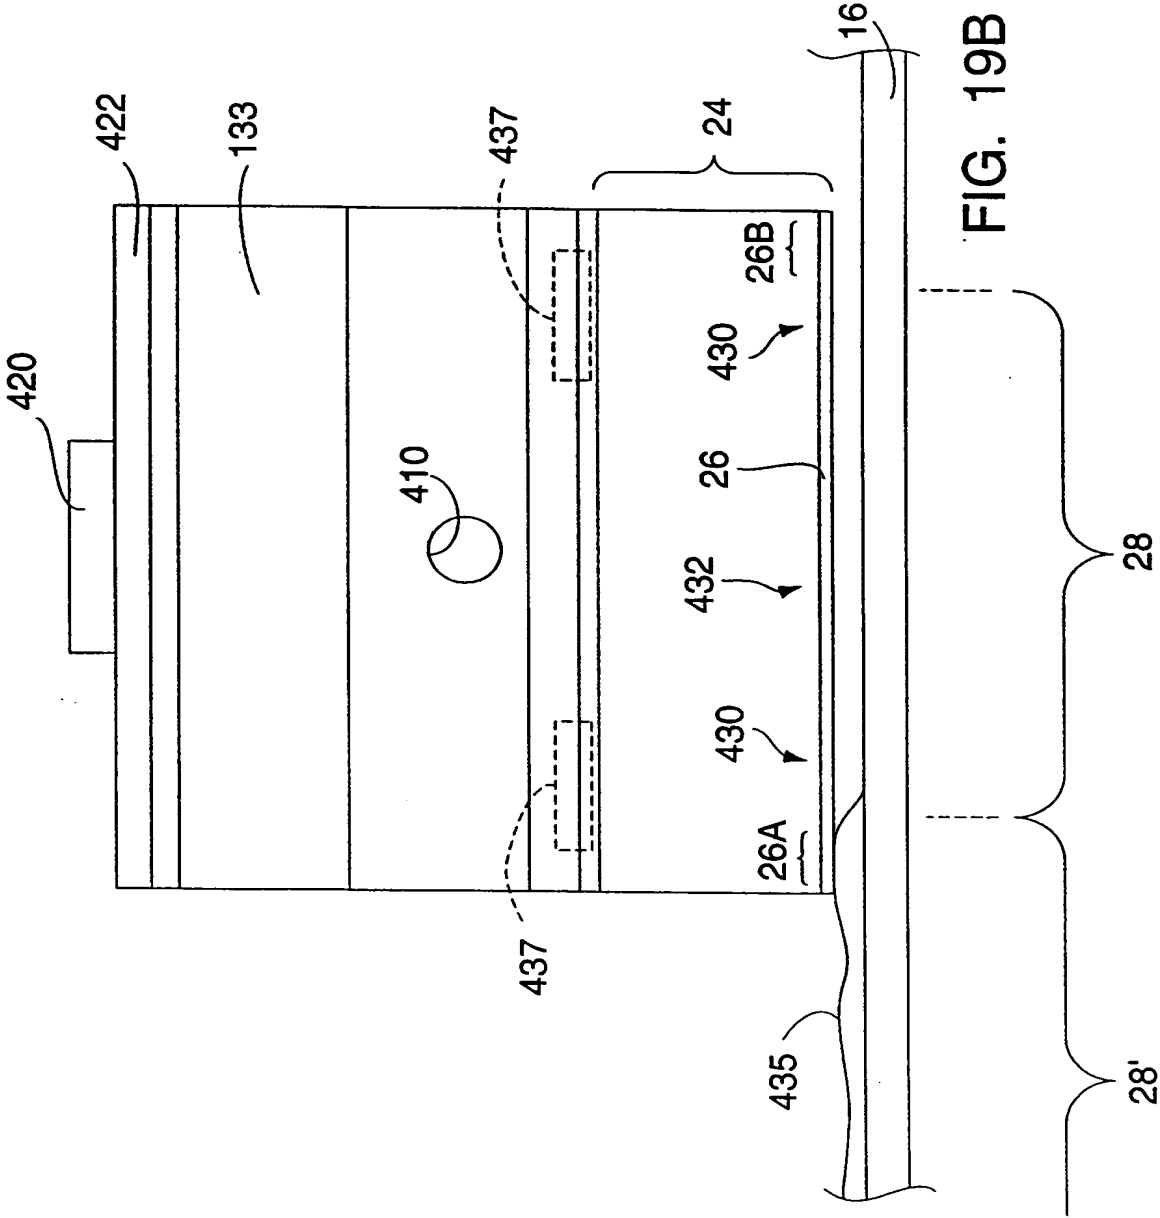


FIG. 18

21/45





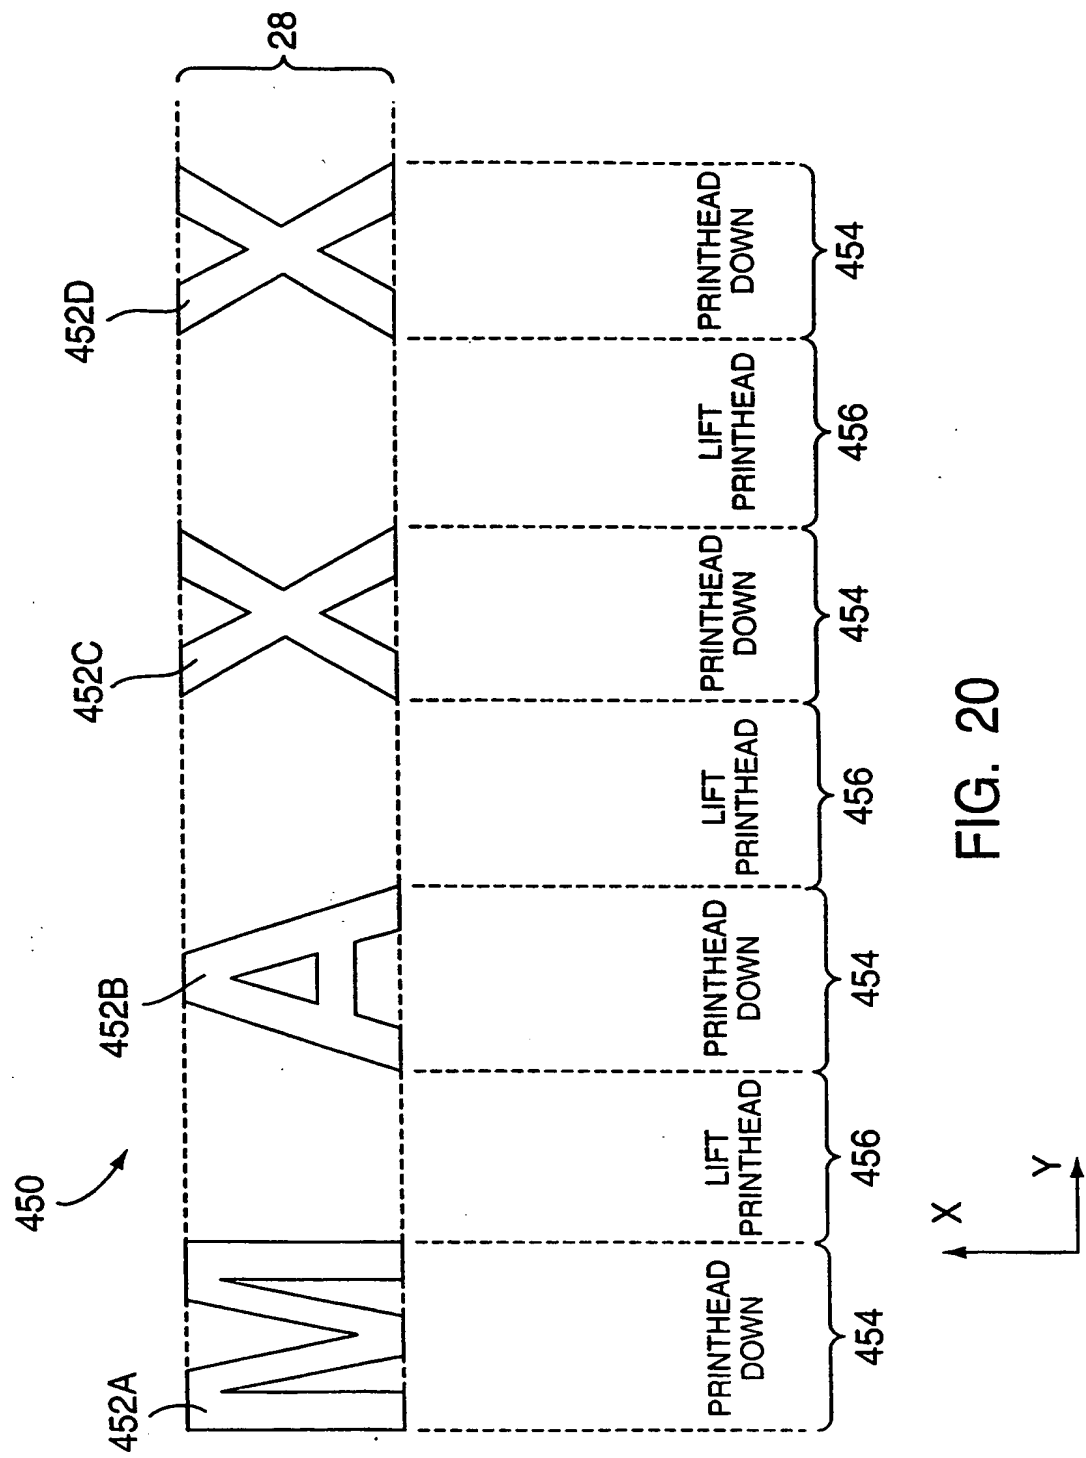


FIG. 20

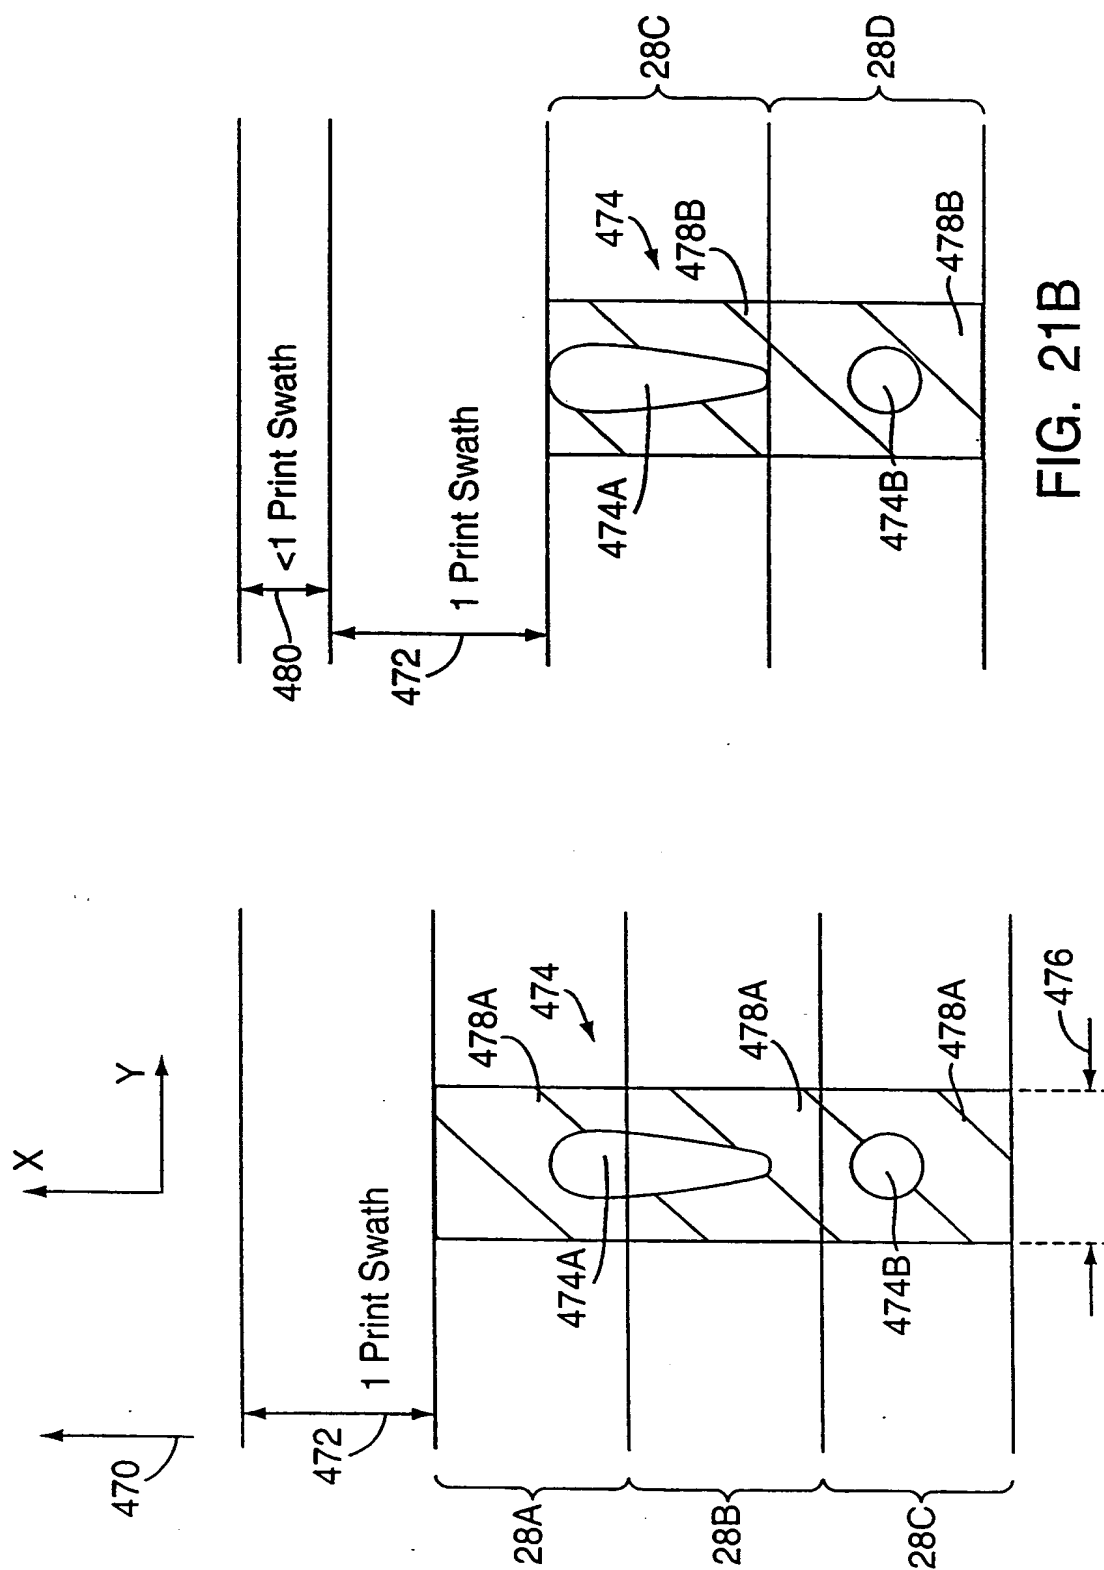


FIG. 21A

25/45

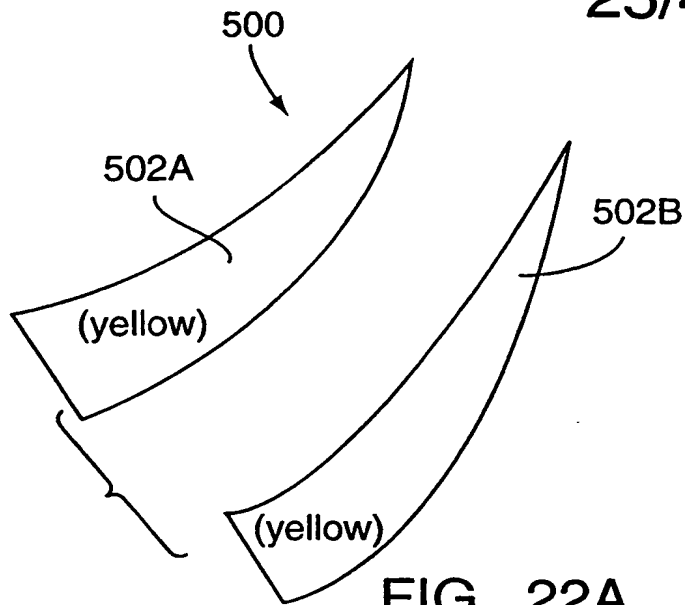


FIG. 22A

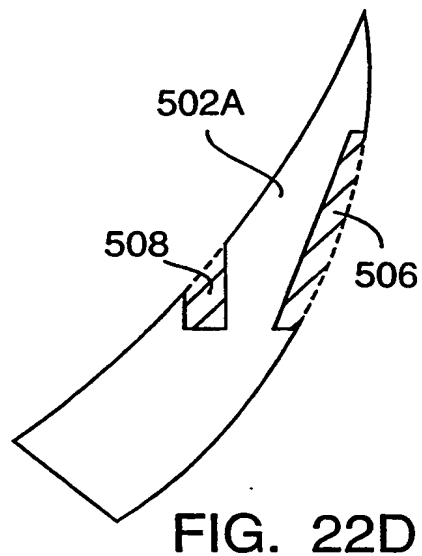


FIG. 22D

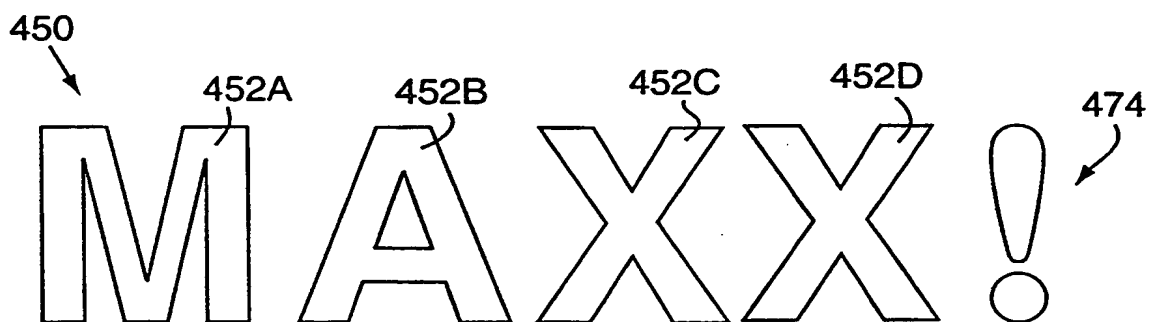


FIG. 22B


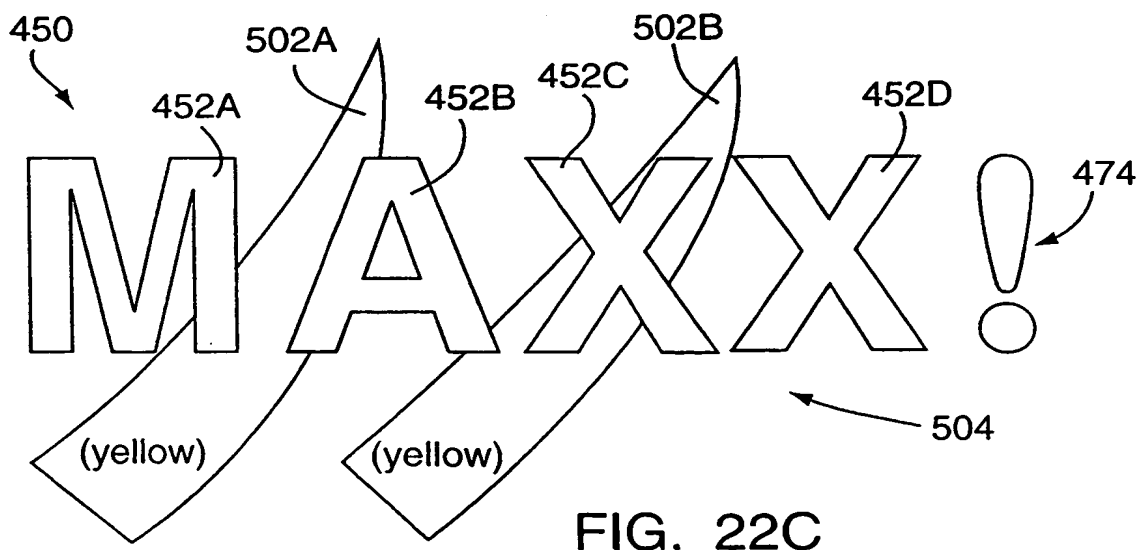


FIG. 22C

26/45

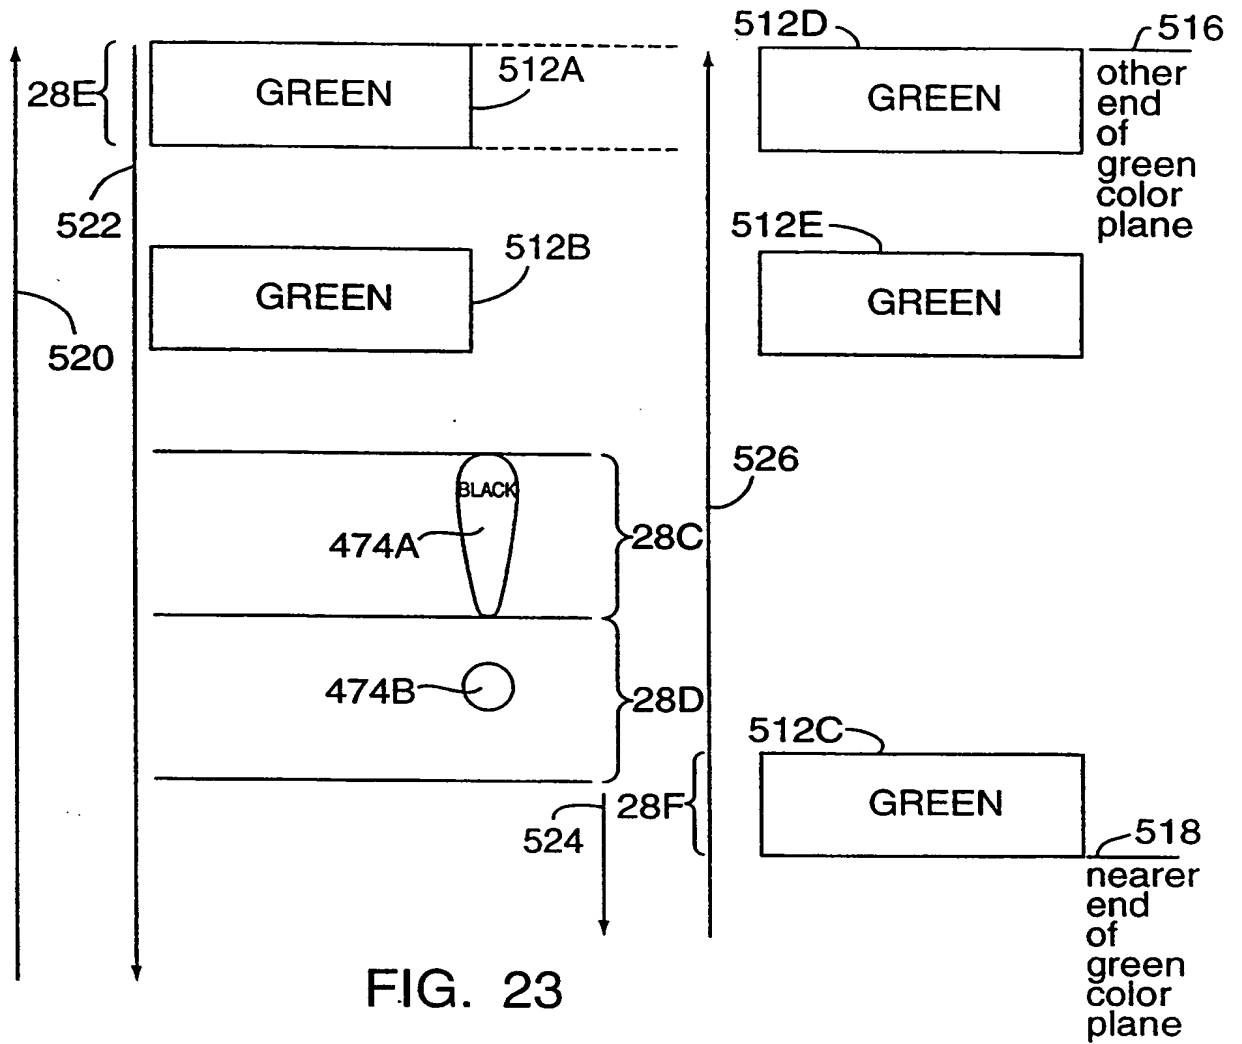

27/45

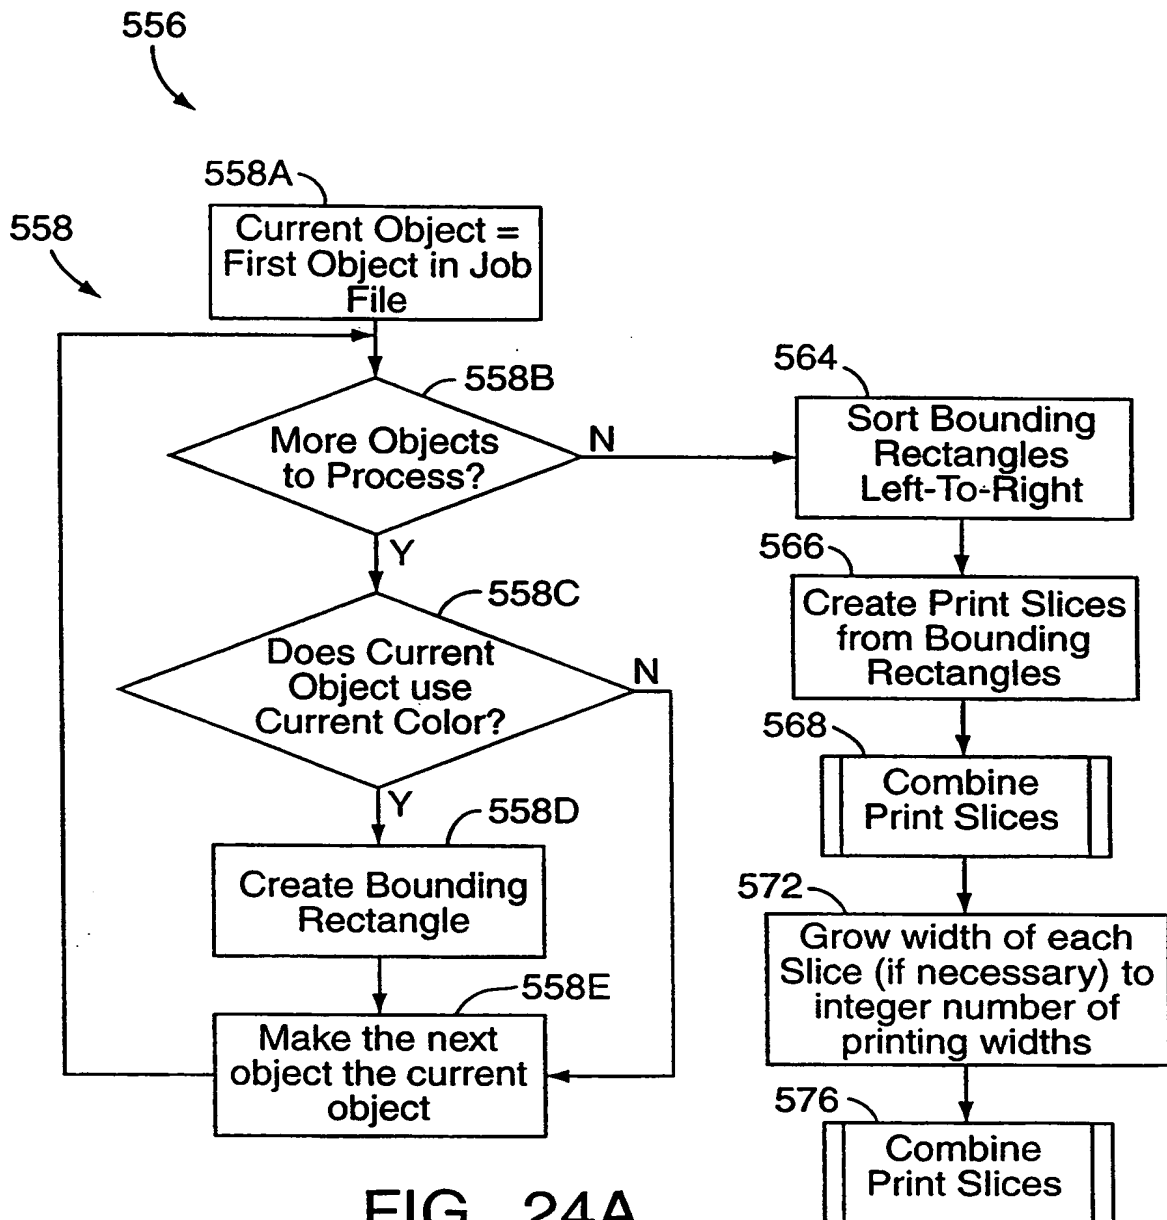


FIG. 24A

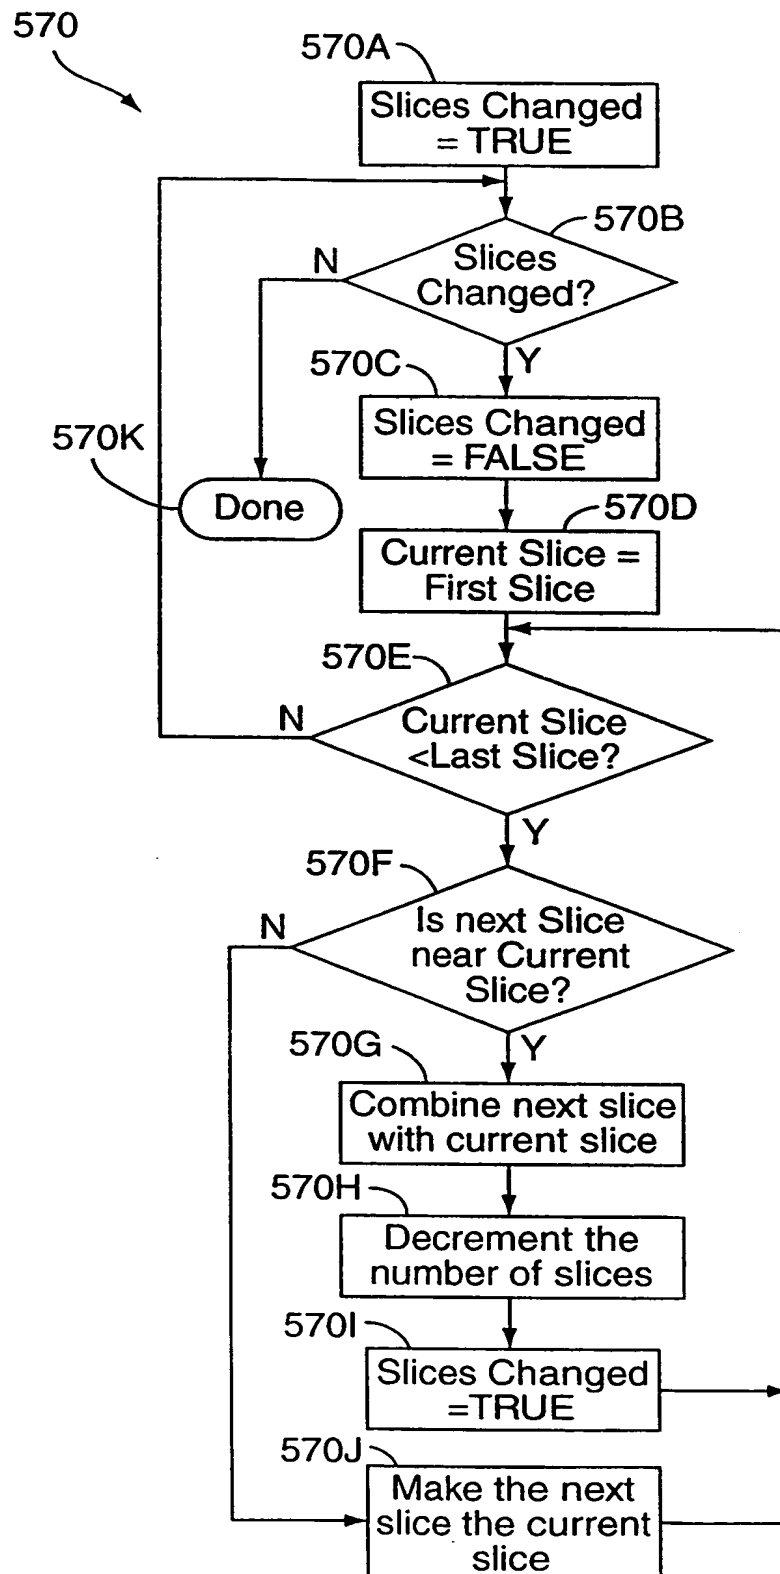


FIG. 24B

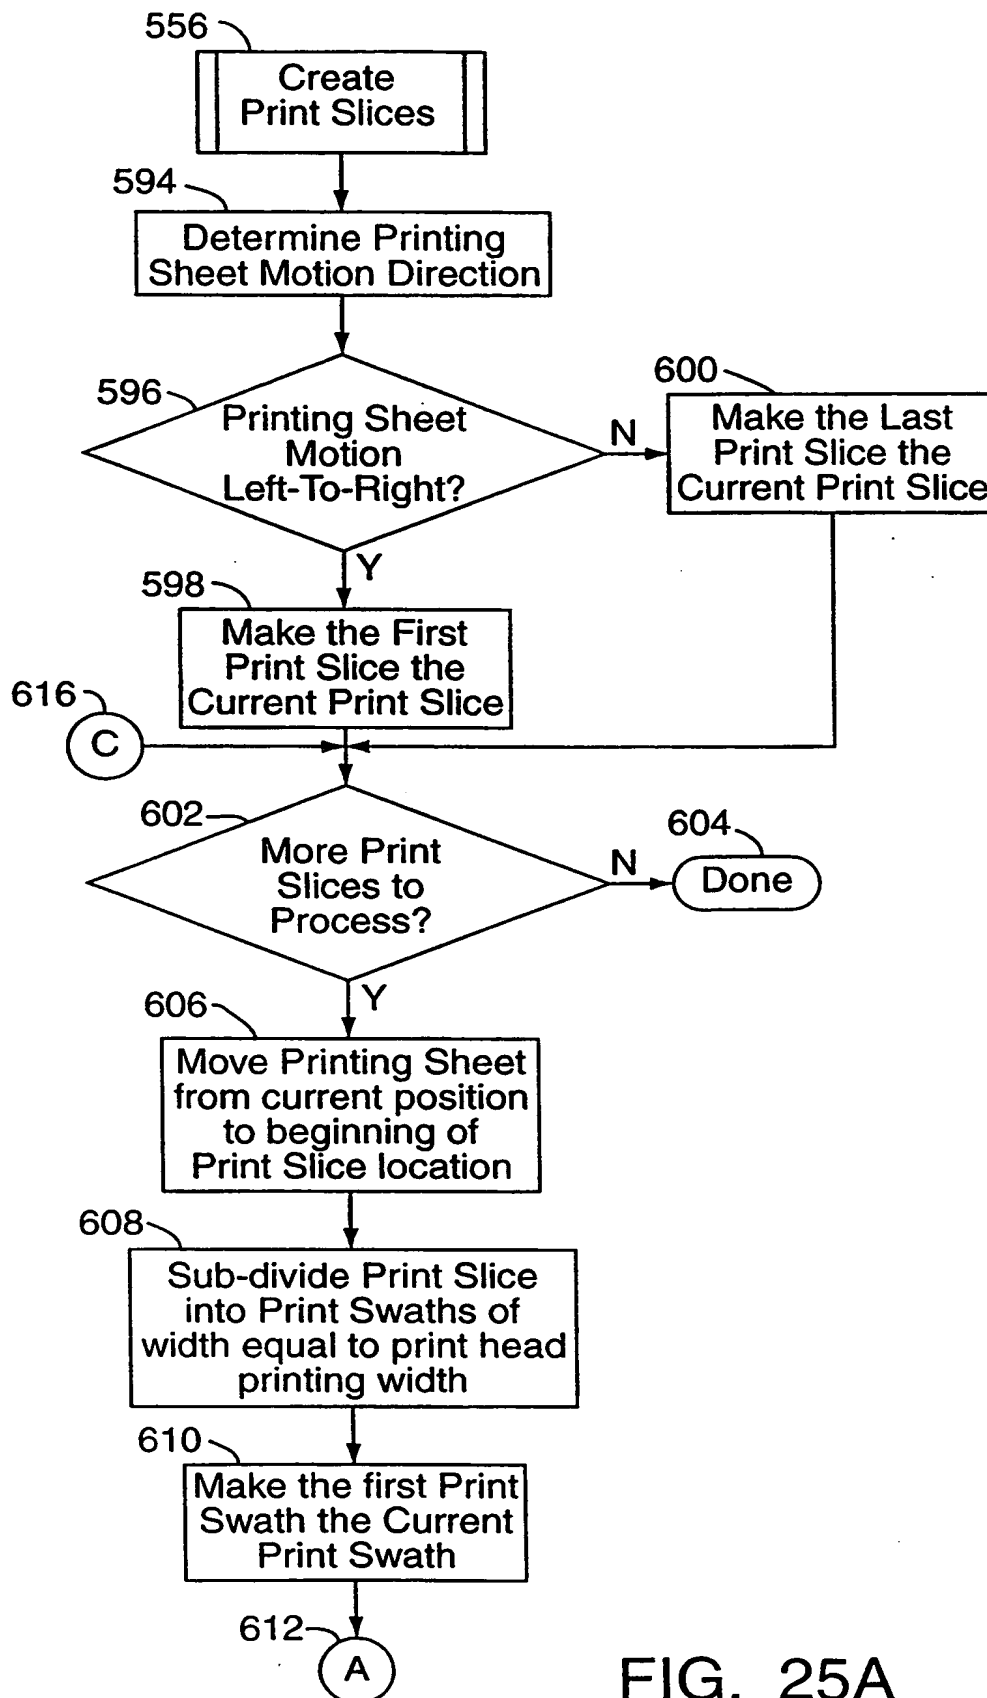


FIG. 25A

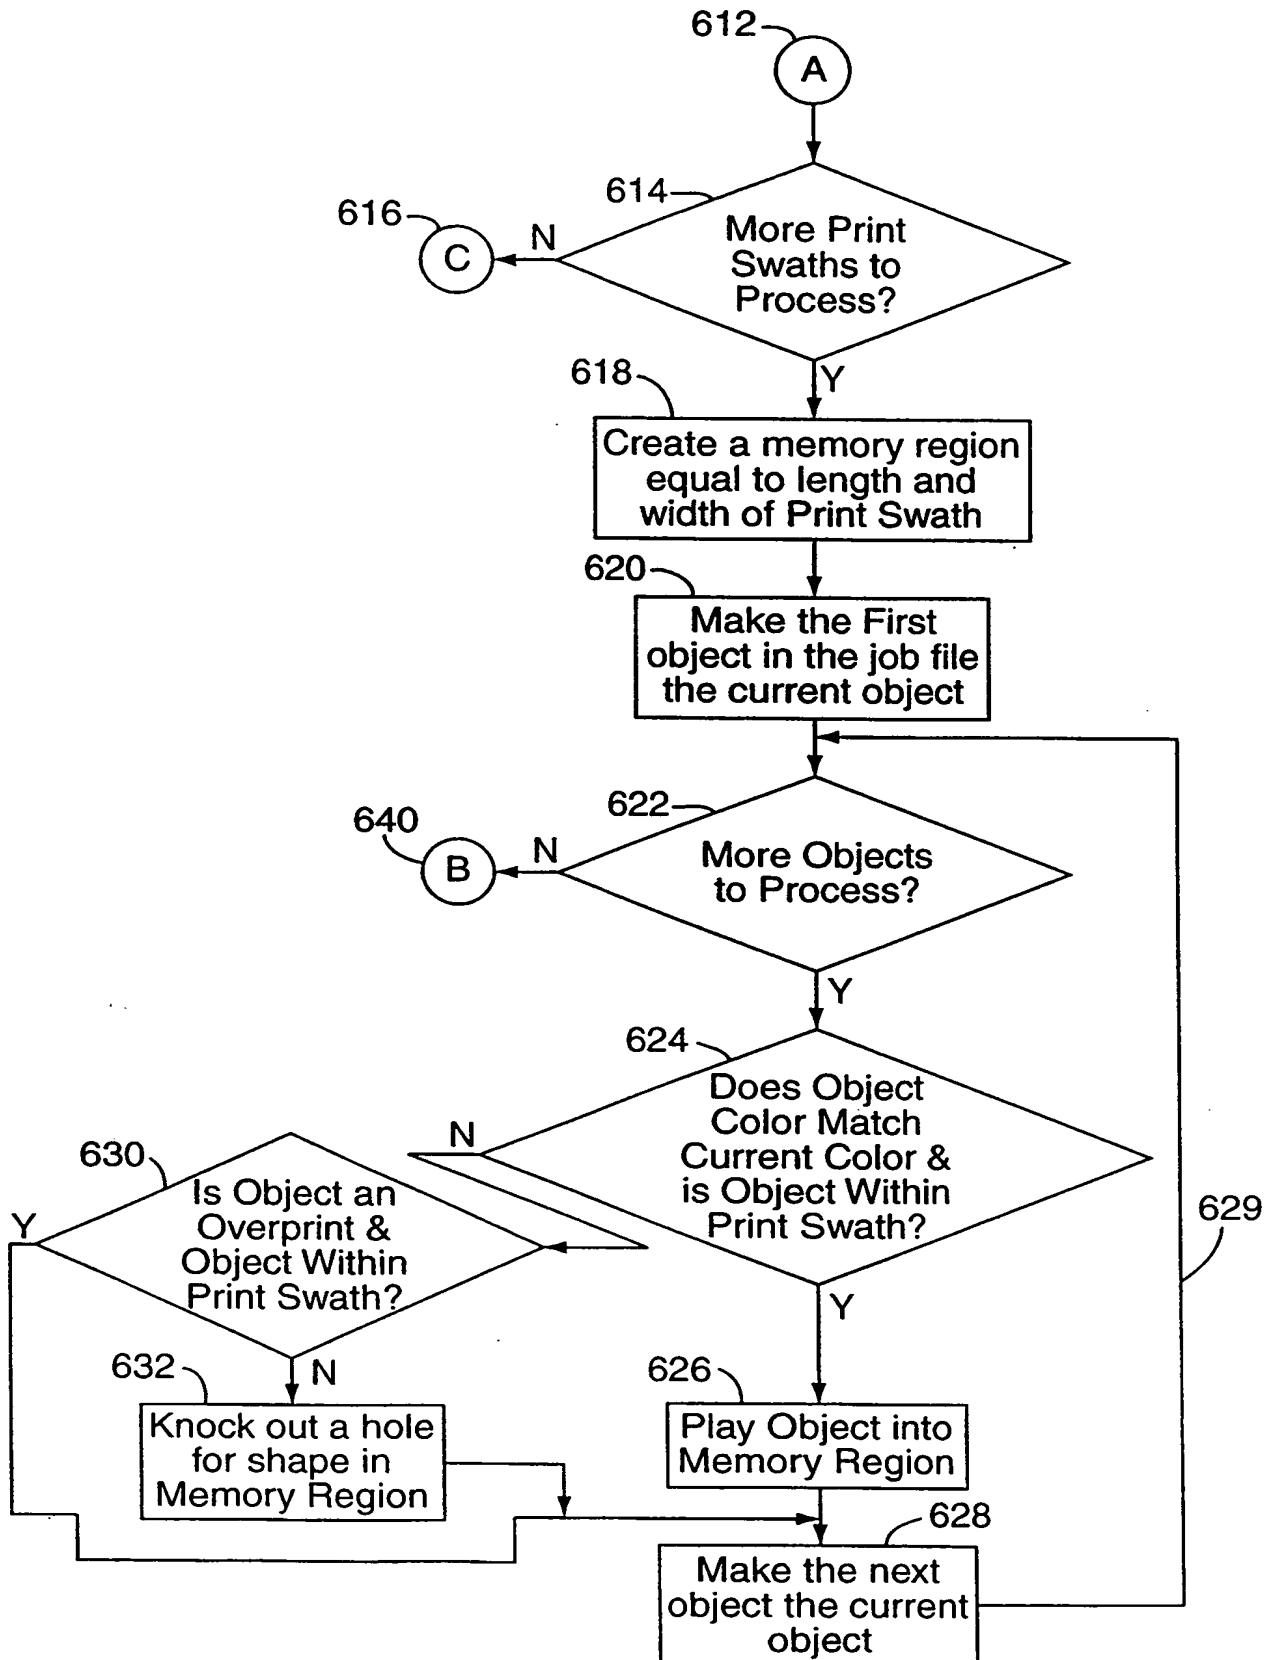


FIG. 25B

31/45

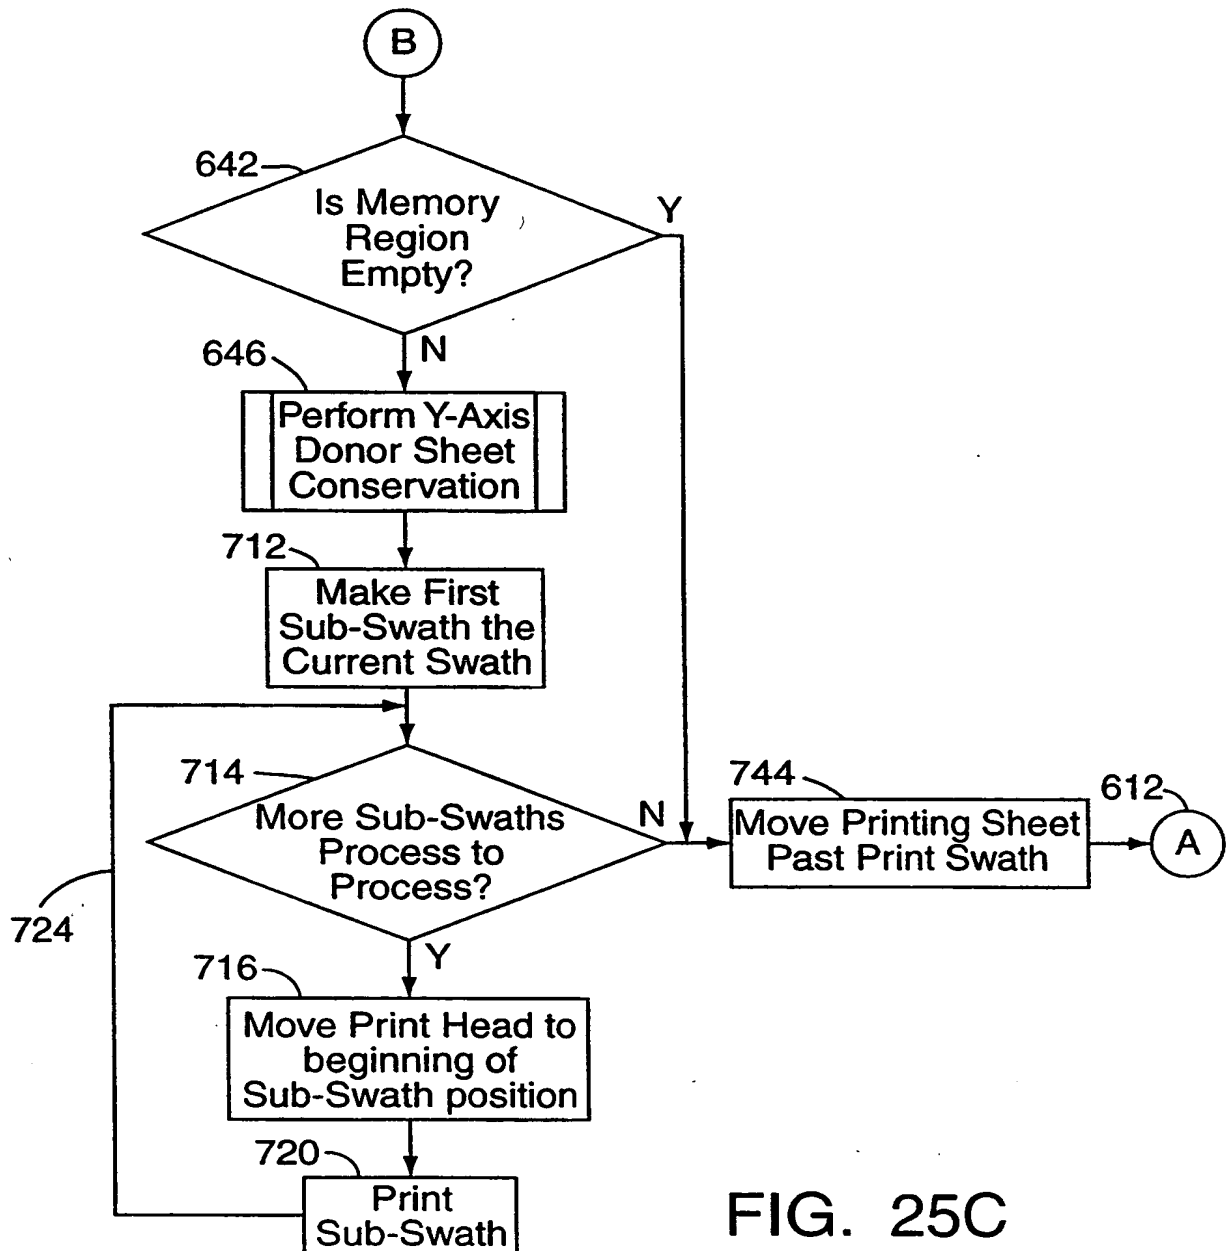


FIG. 25C



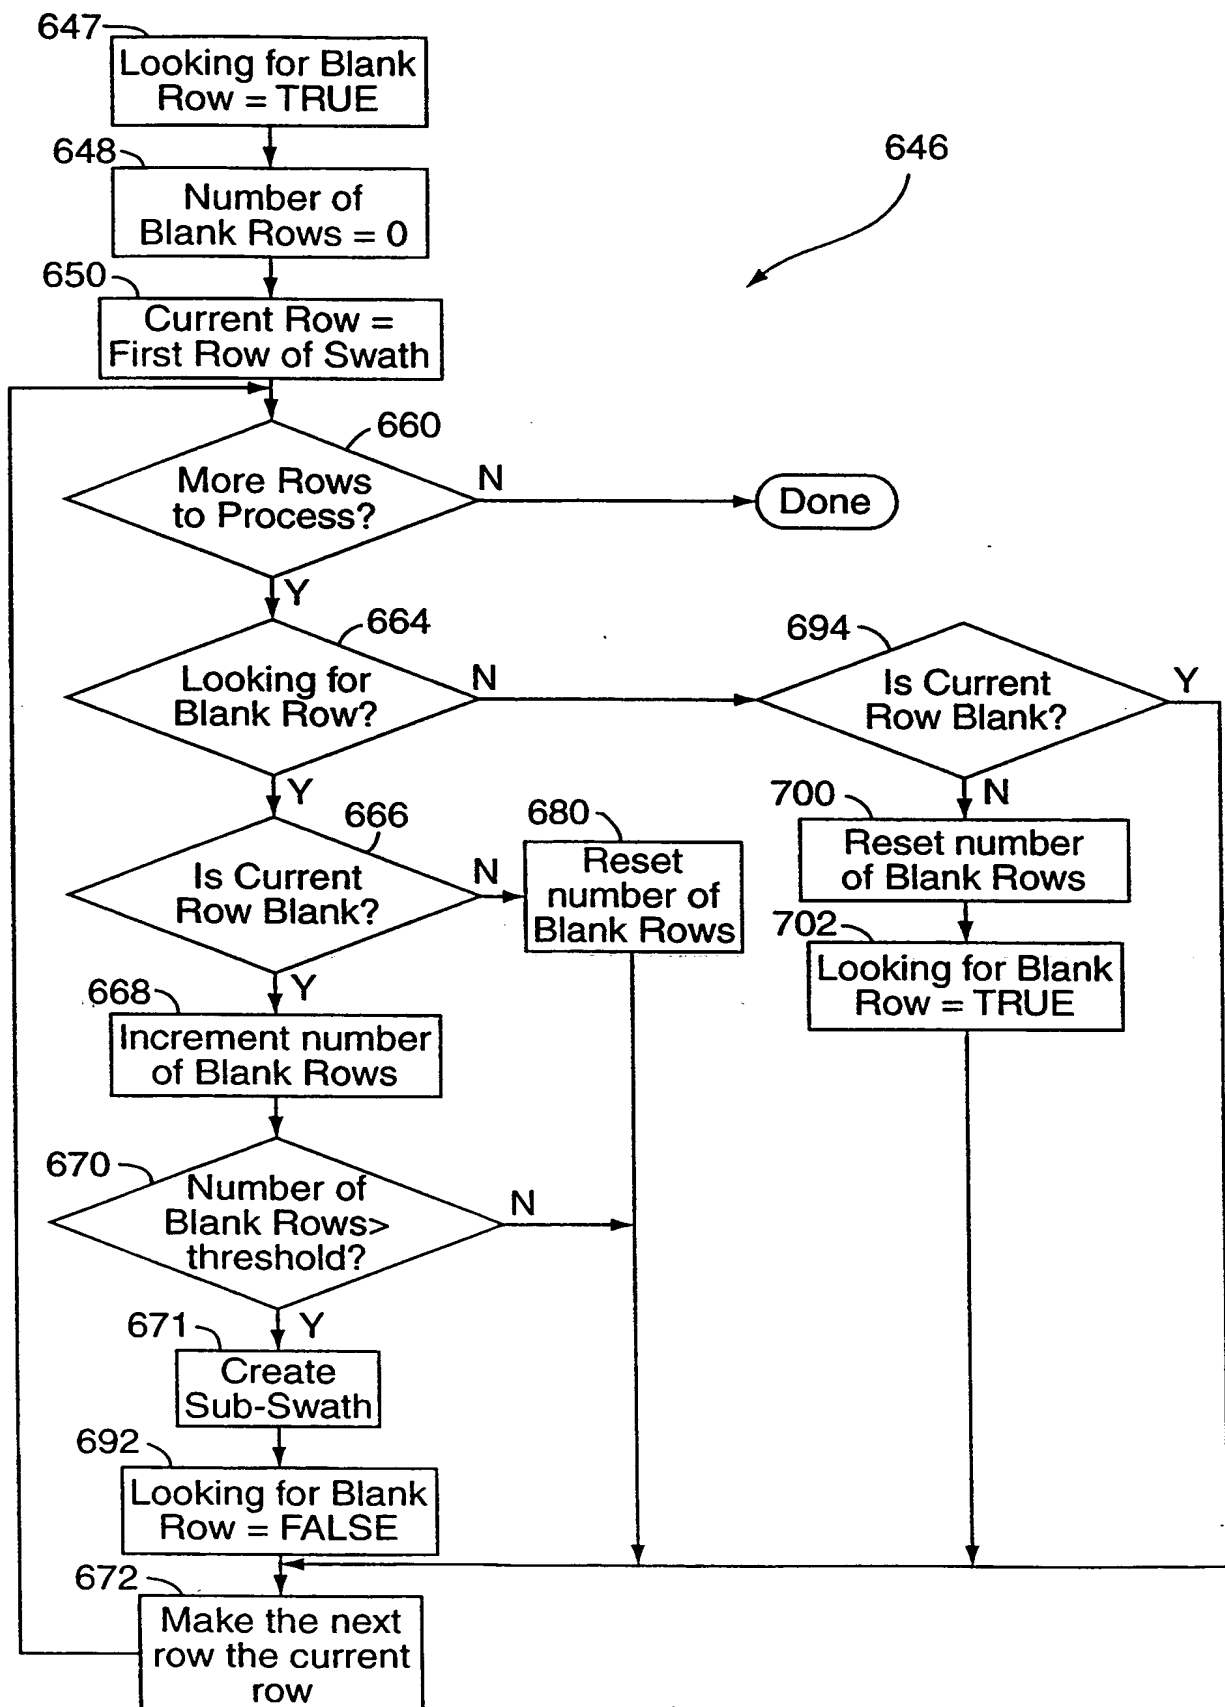


FIG. 26

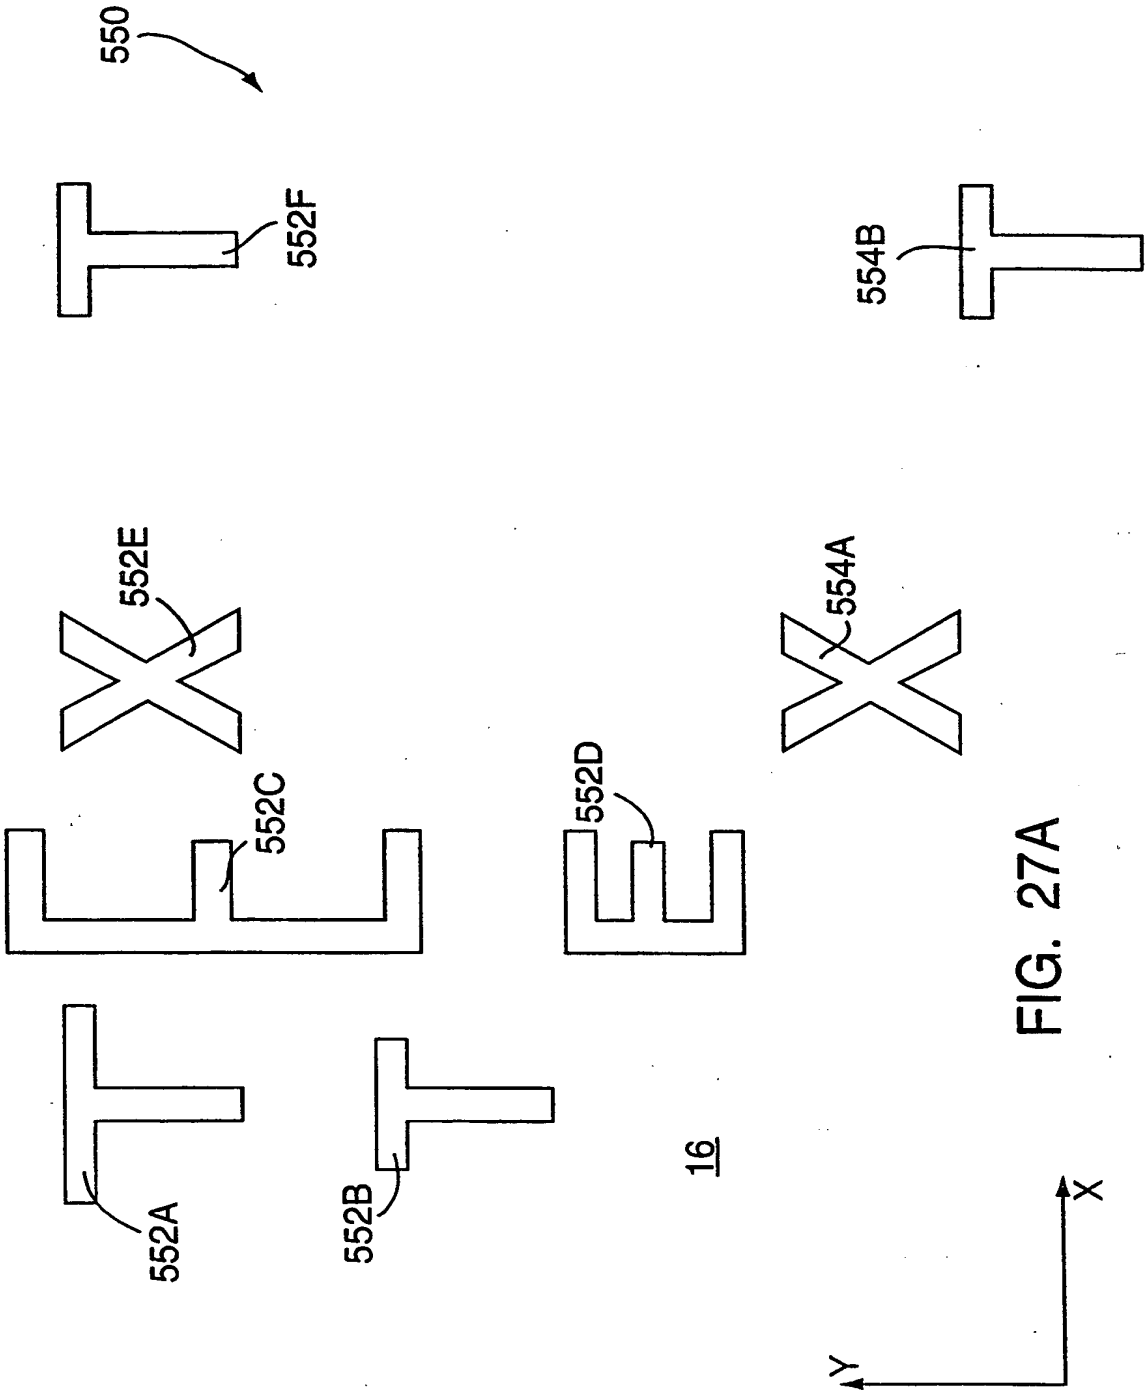

34/45

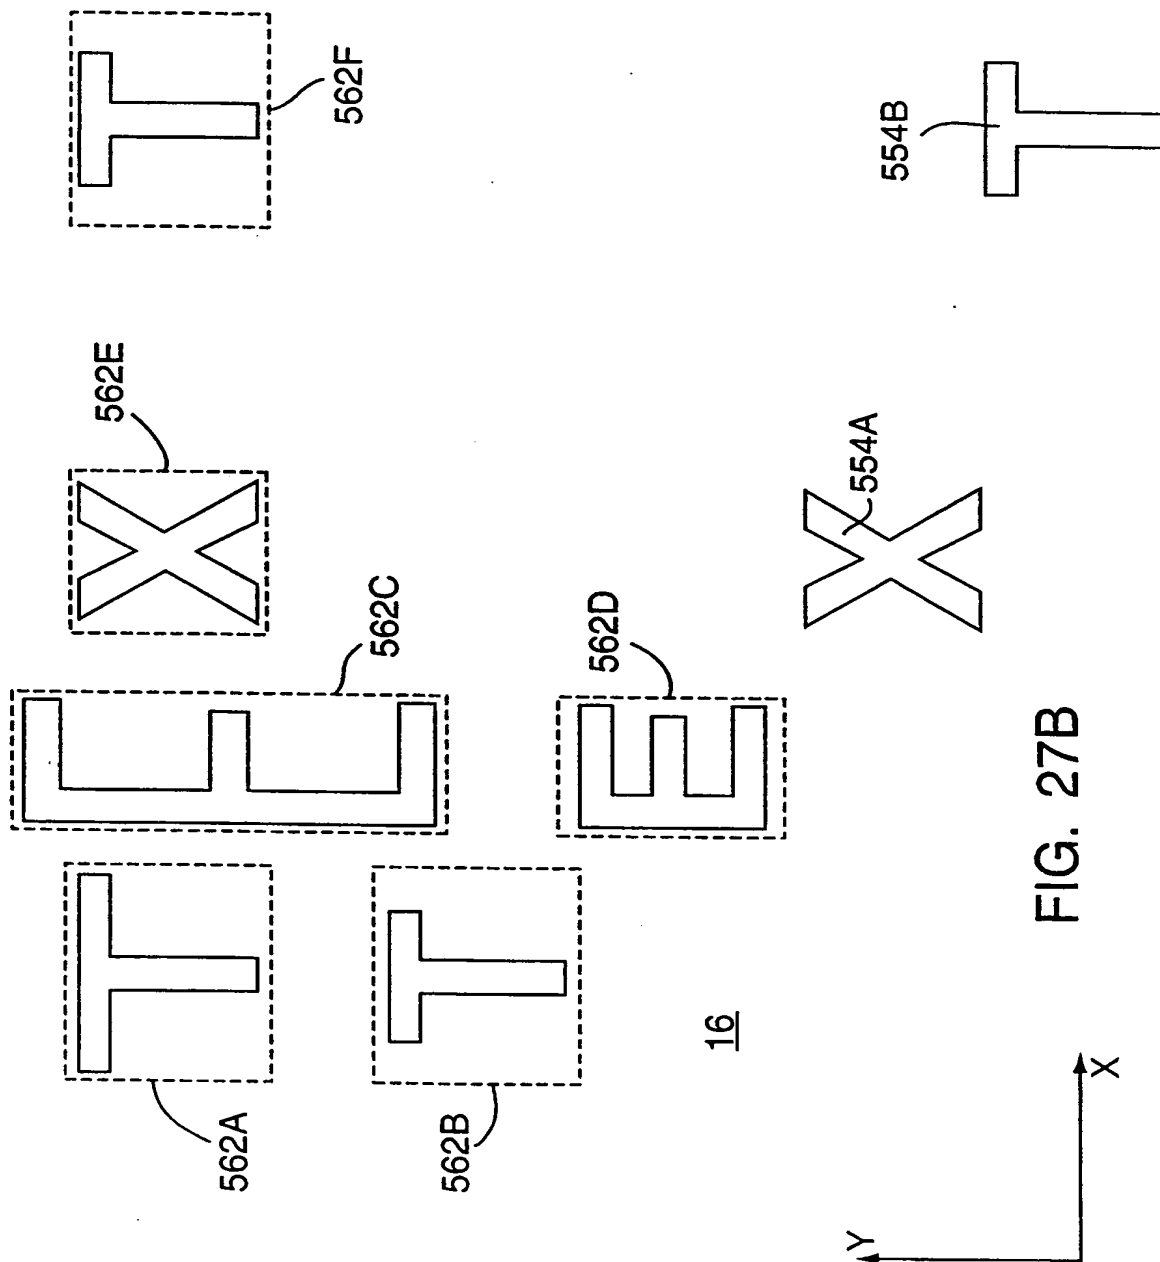

35/45

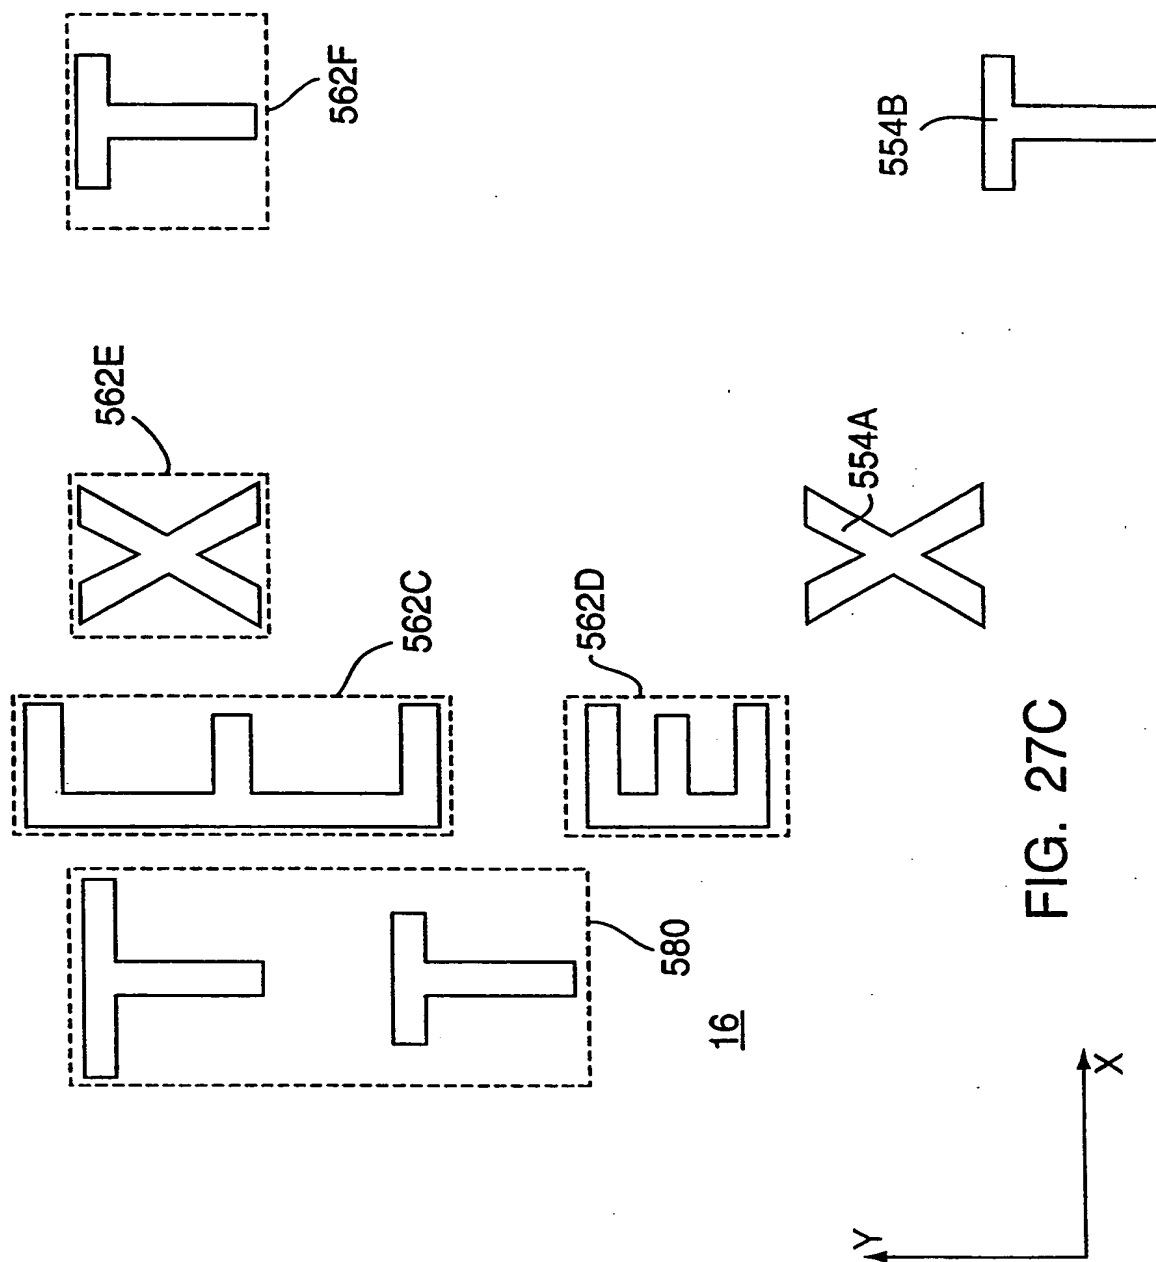


FIG. 27C

36/45


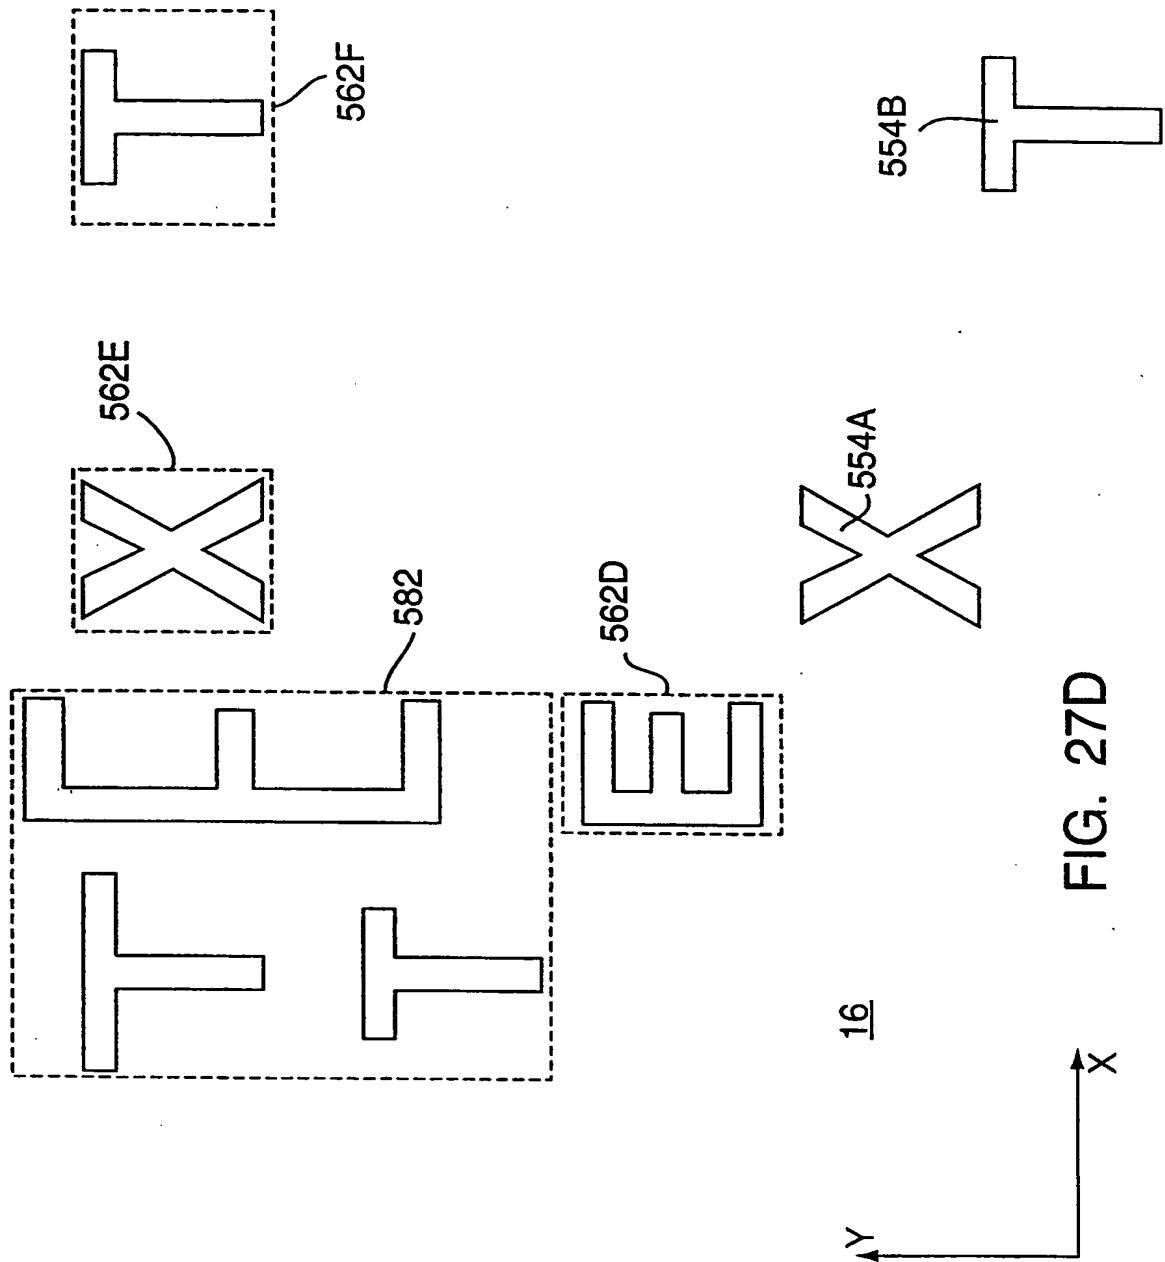


FIG. 27D

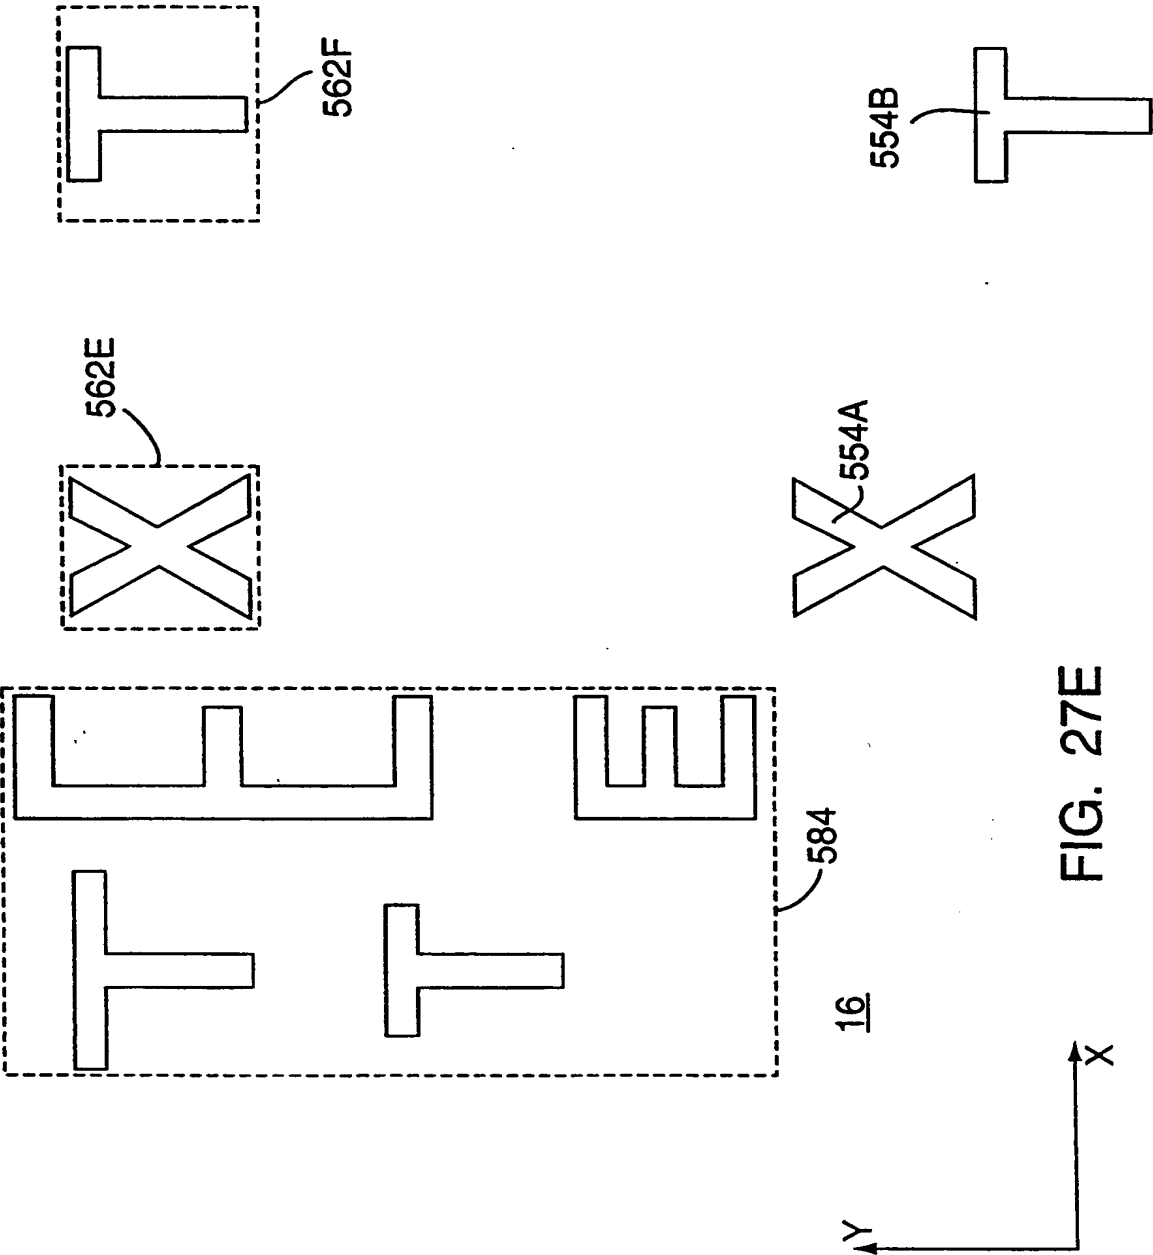

38/45

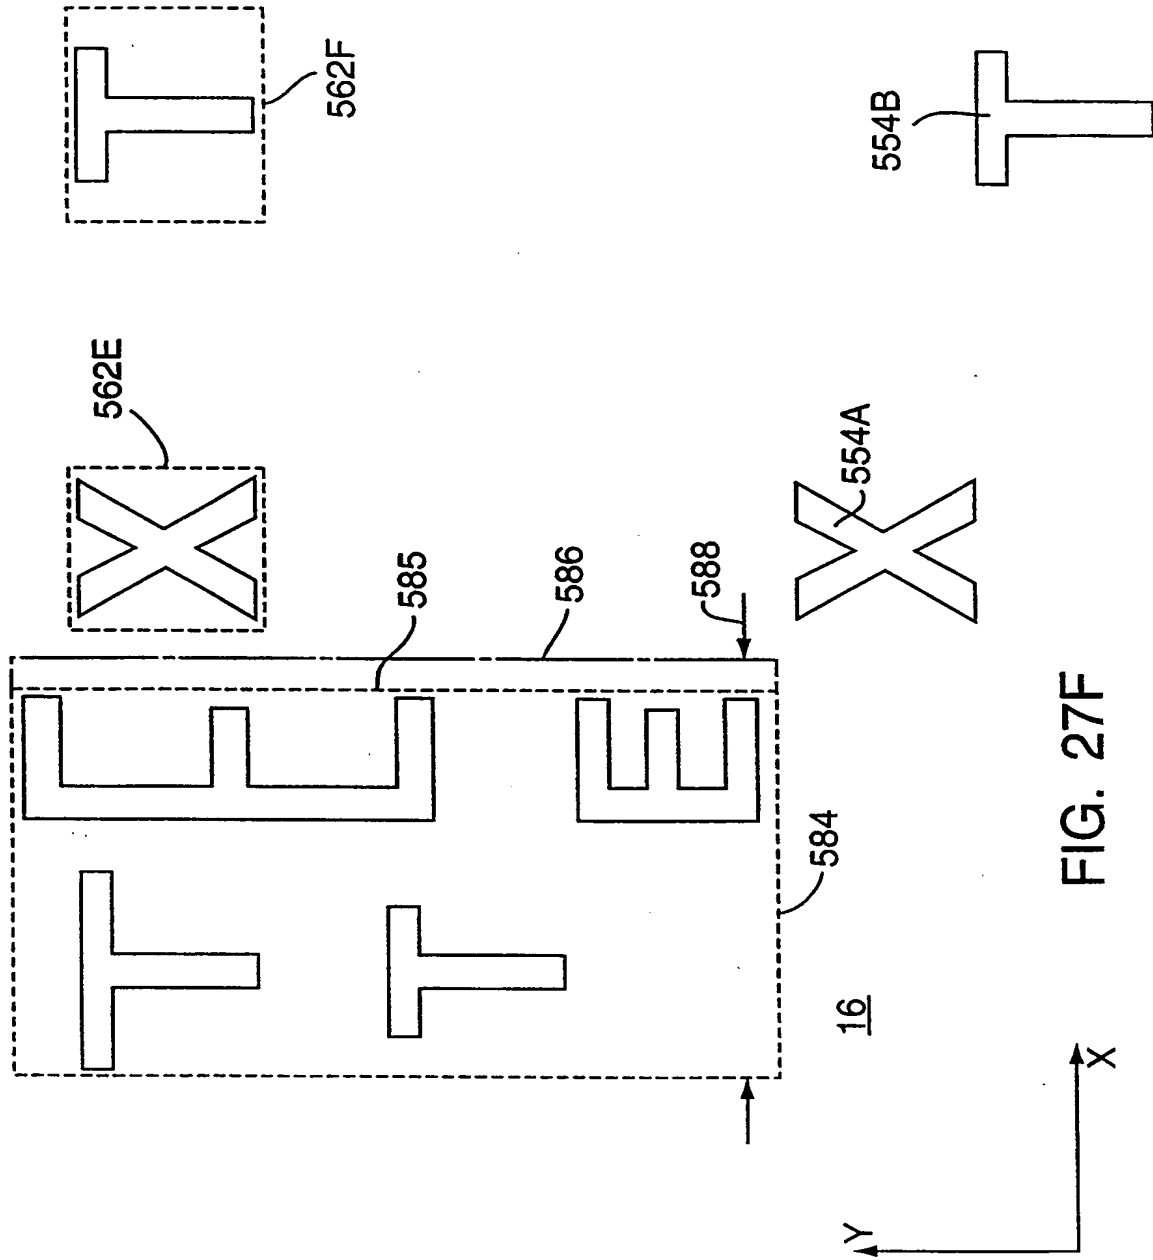


FIG. 27F

39/45


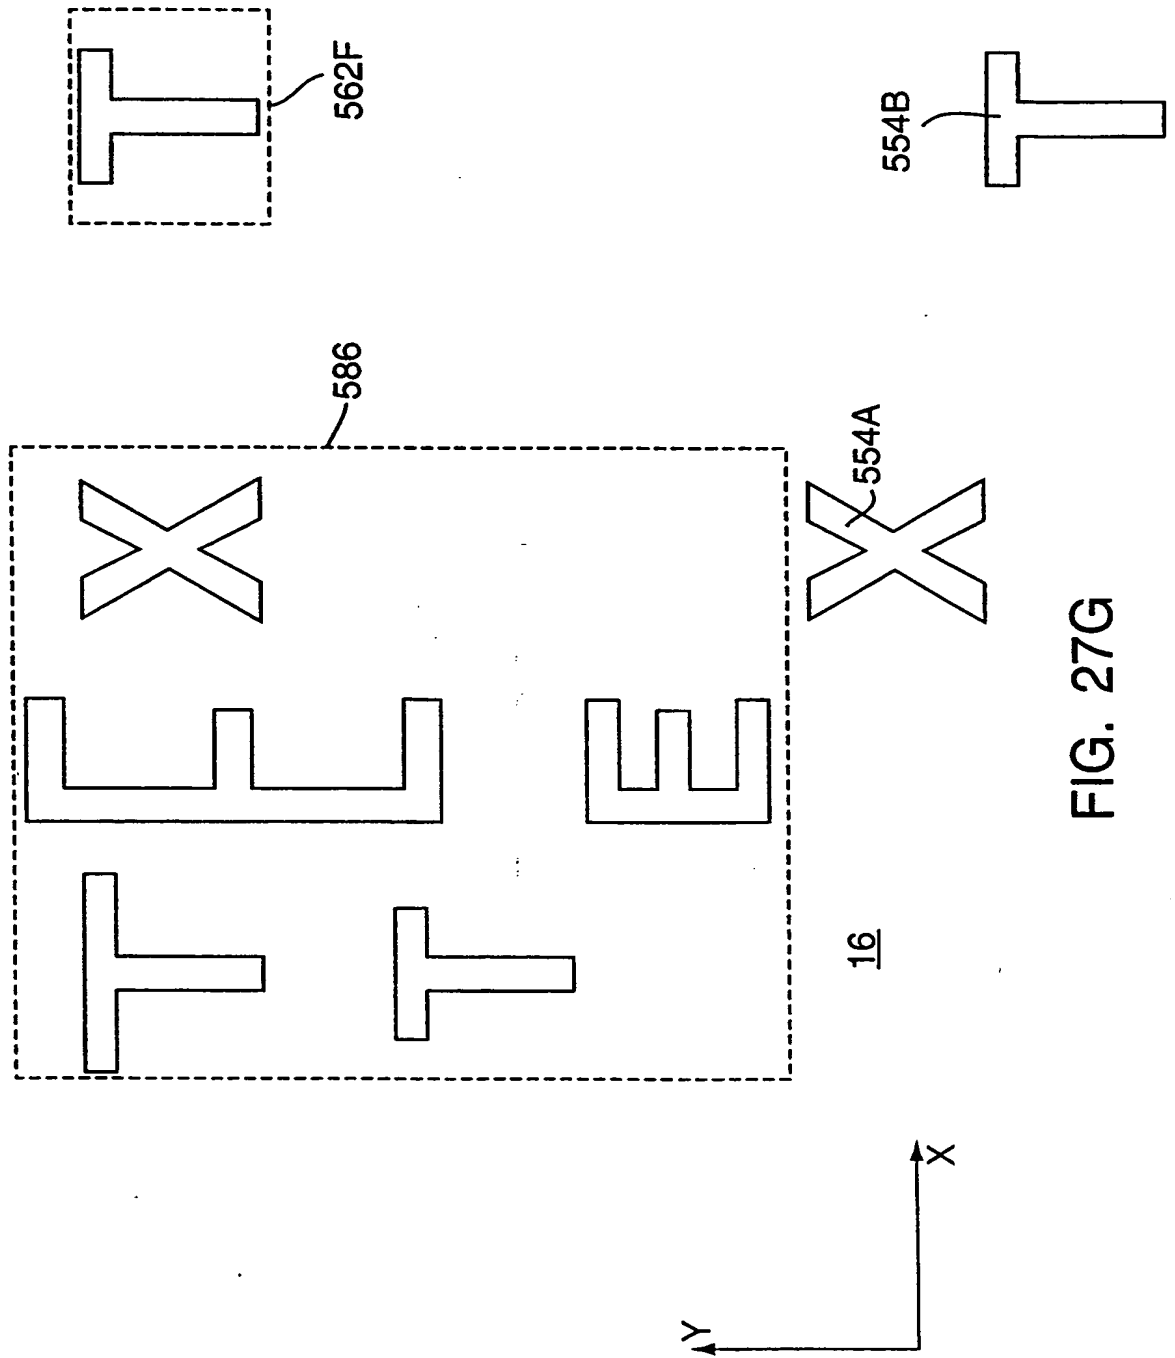


FIG. 27G

40/45

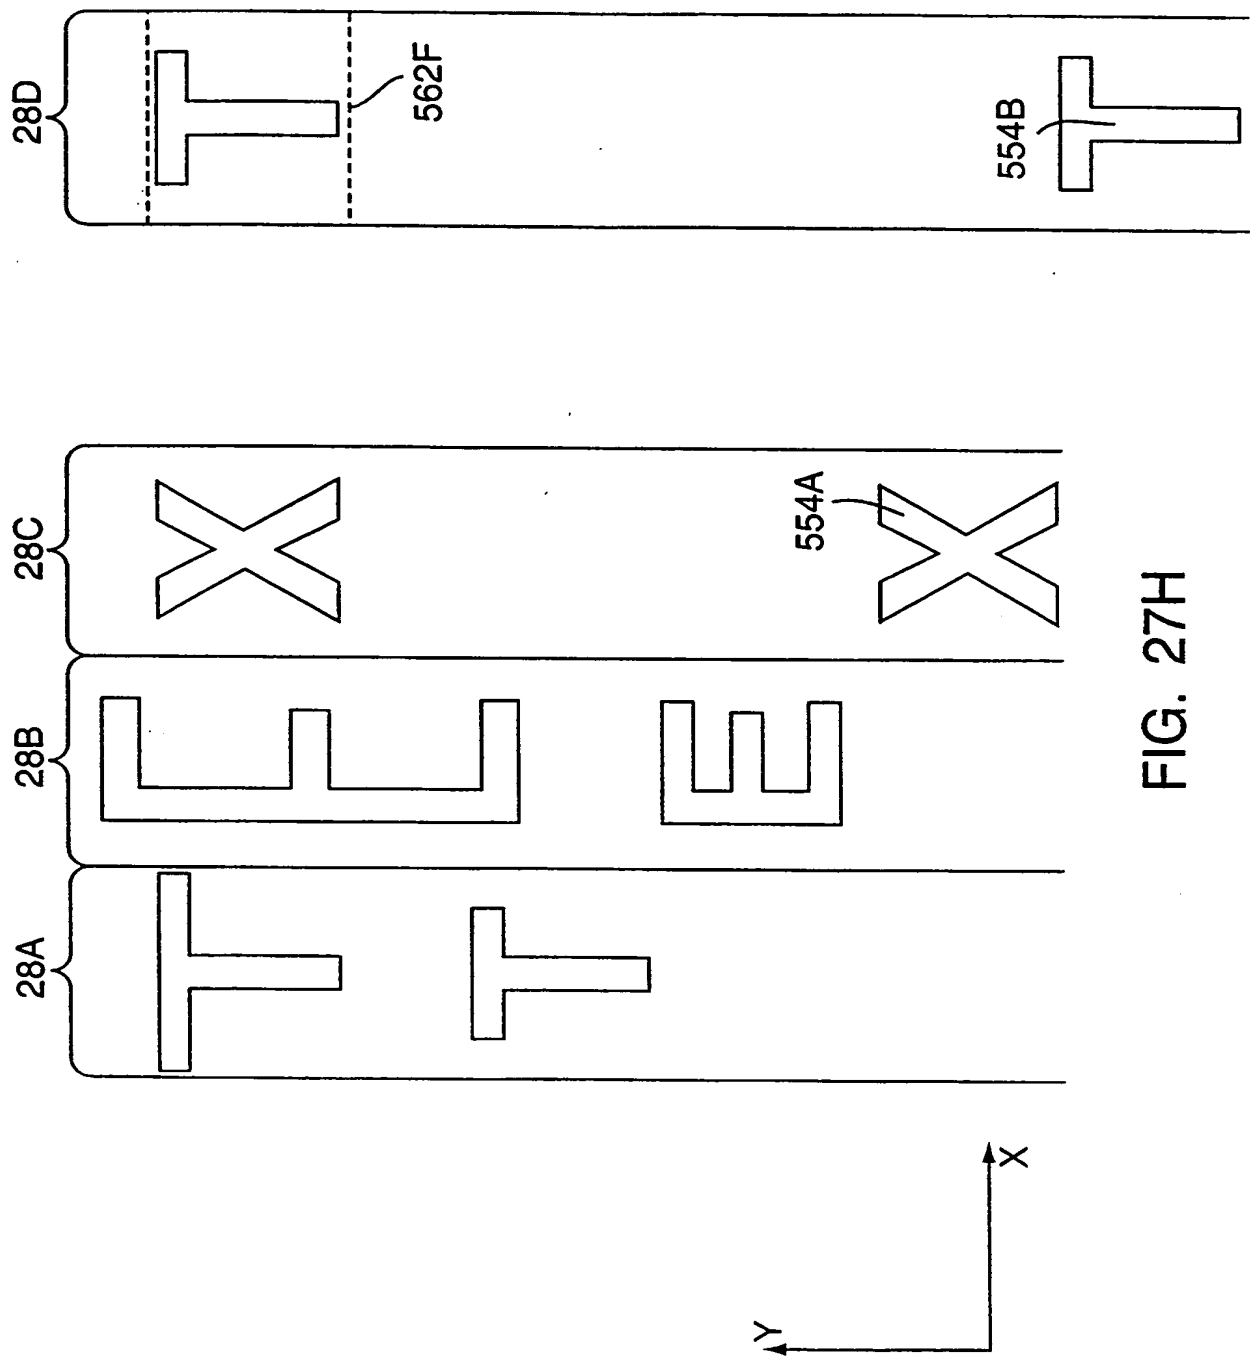

41/45

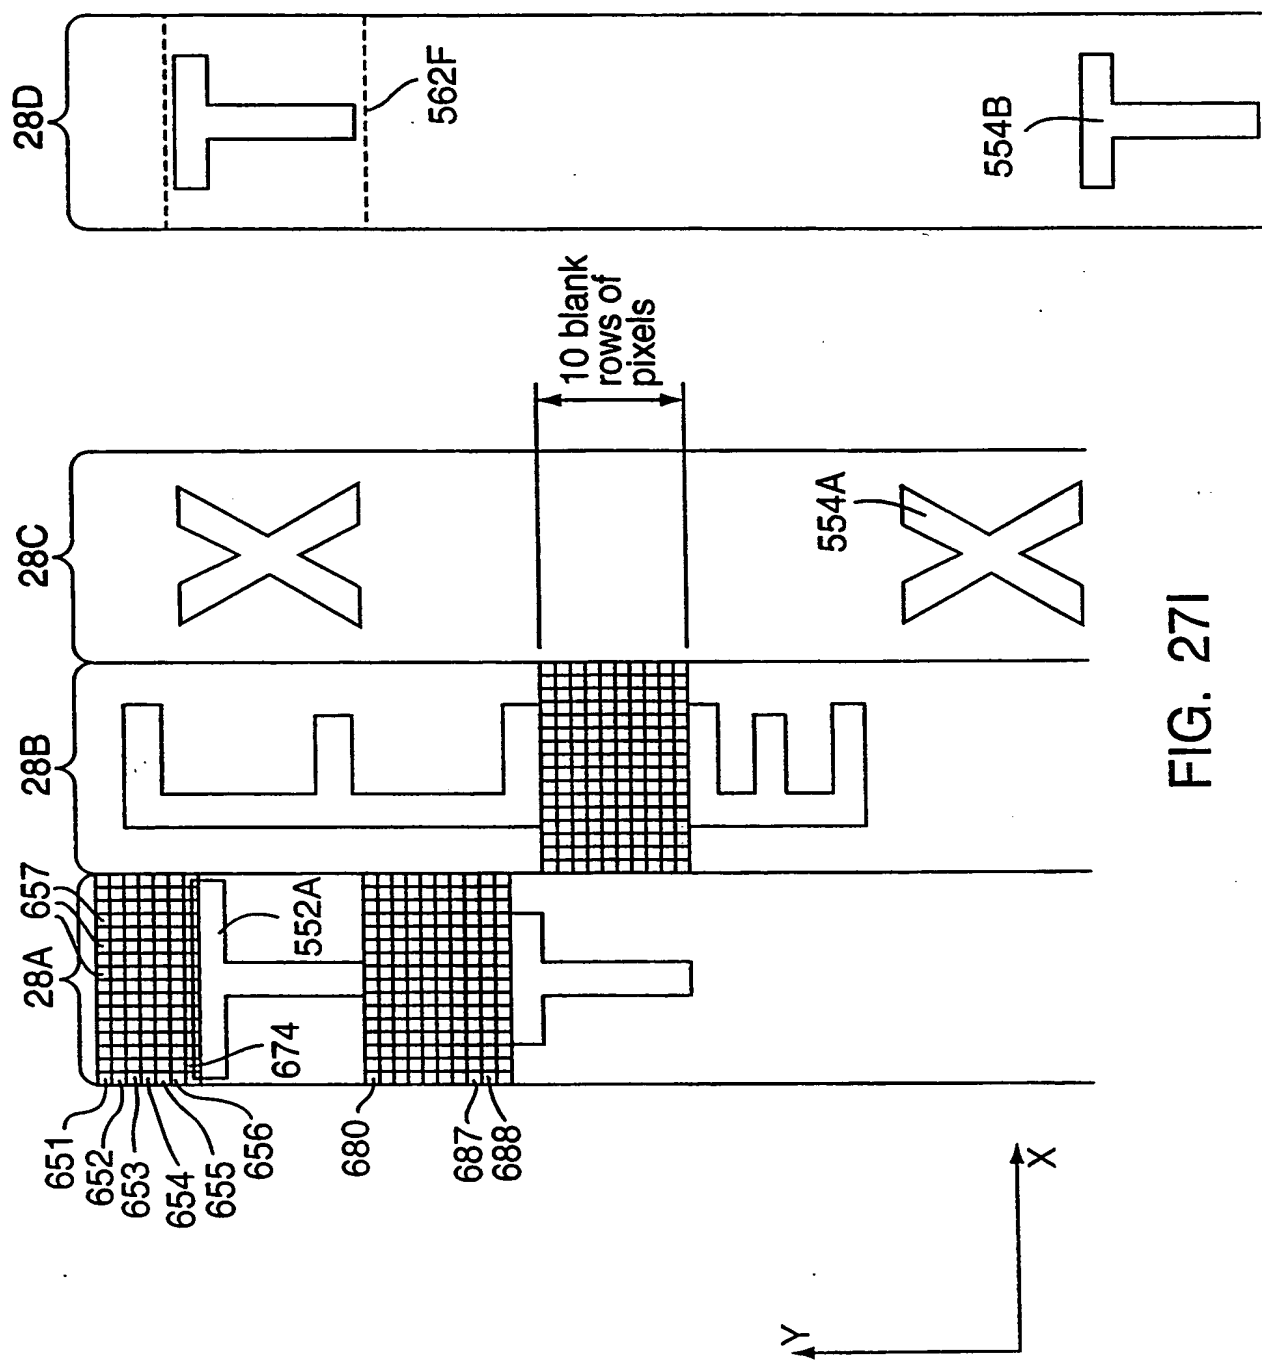


FIG. 27I

42/45

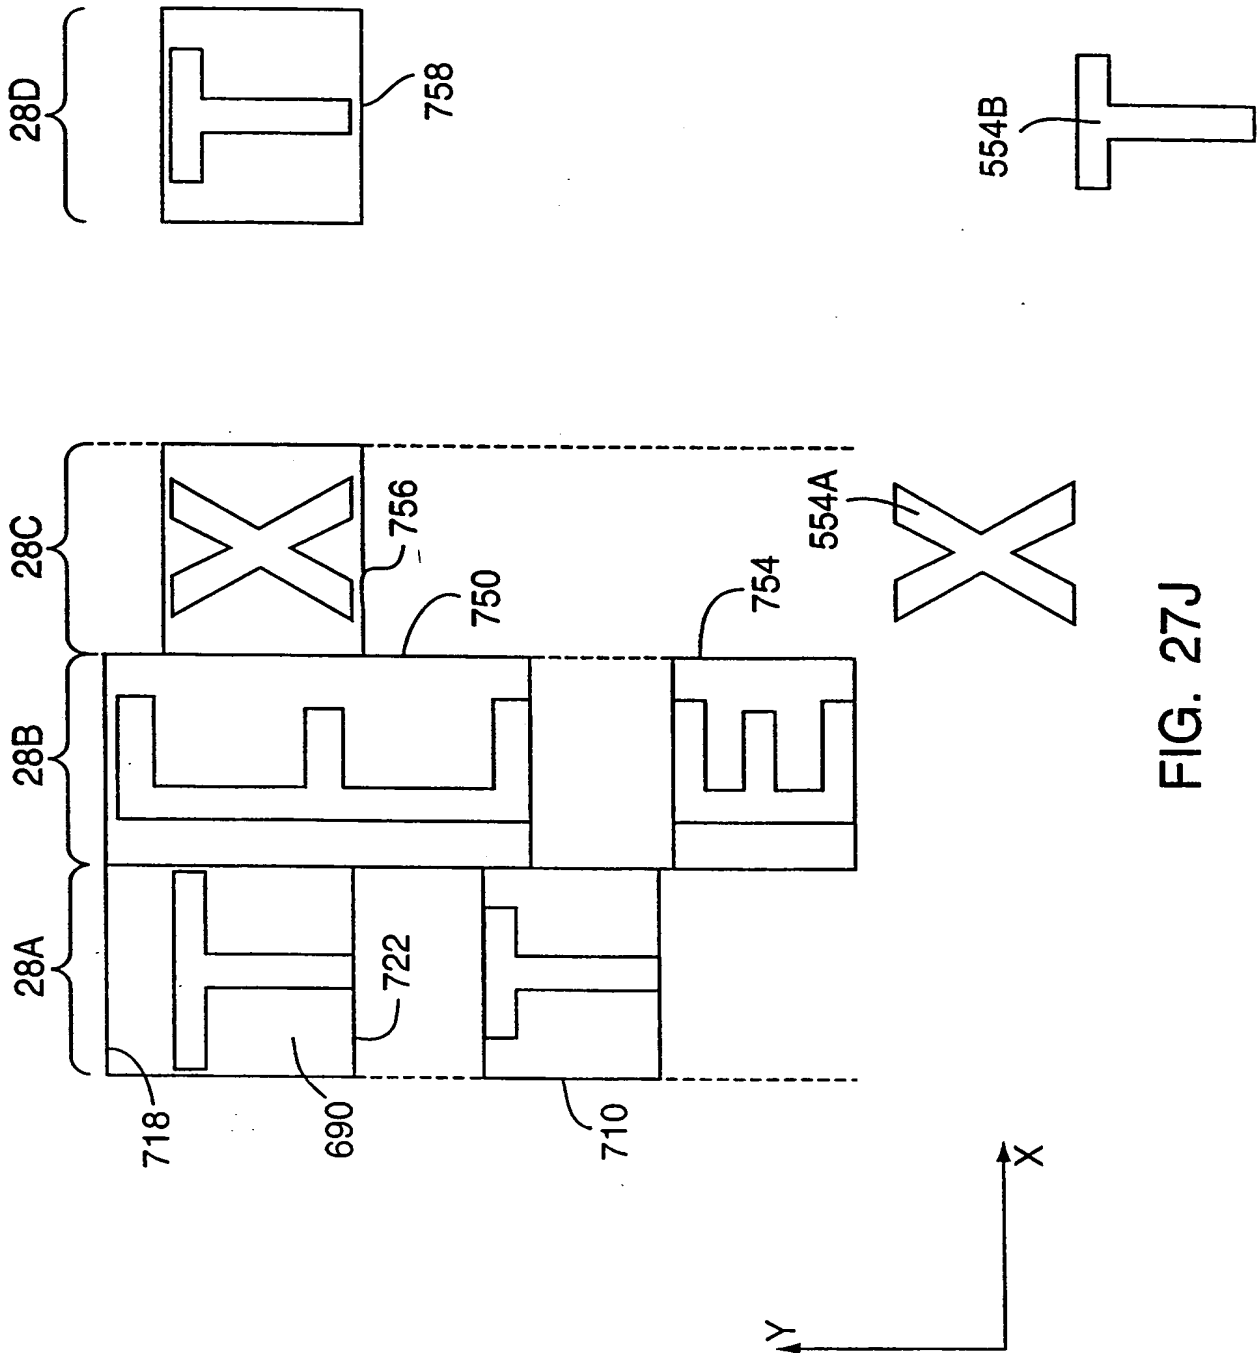


FIG. 27J

43/45


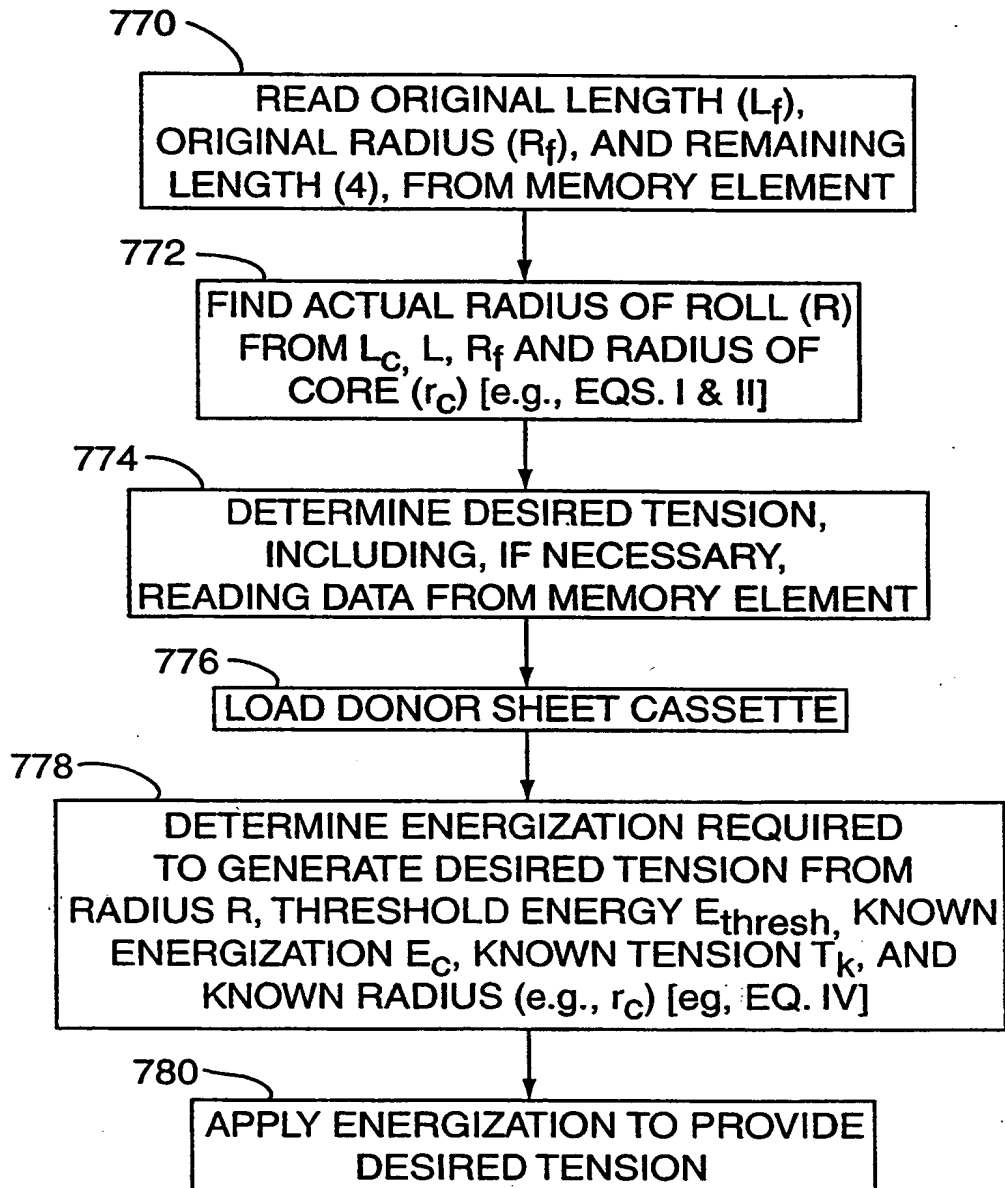


FIG. 28


22A →

44/45

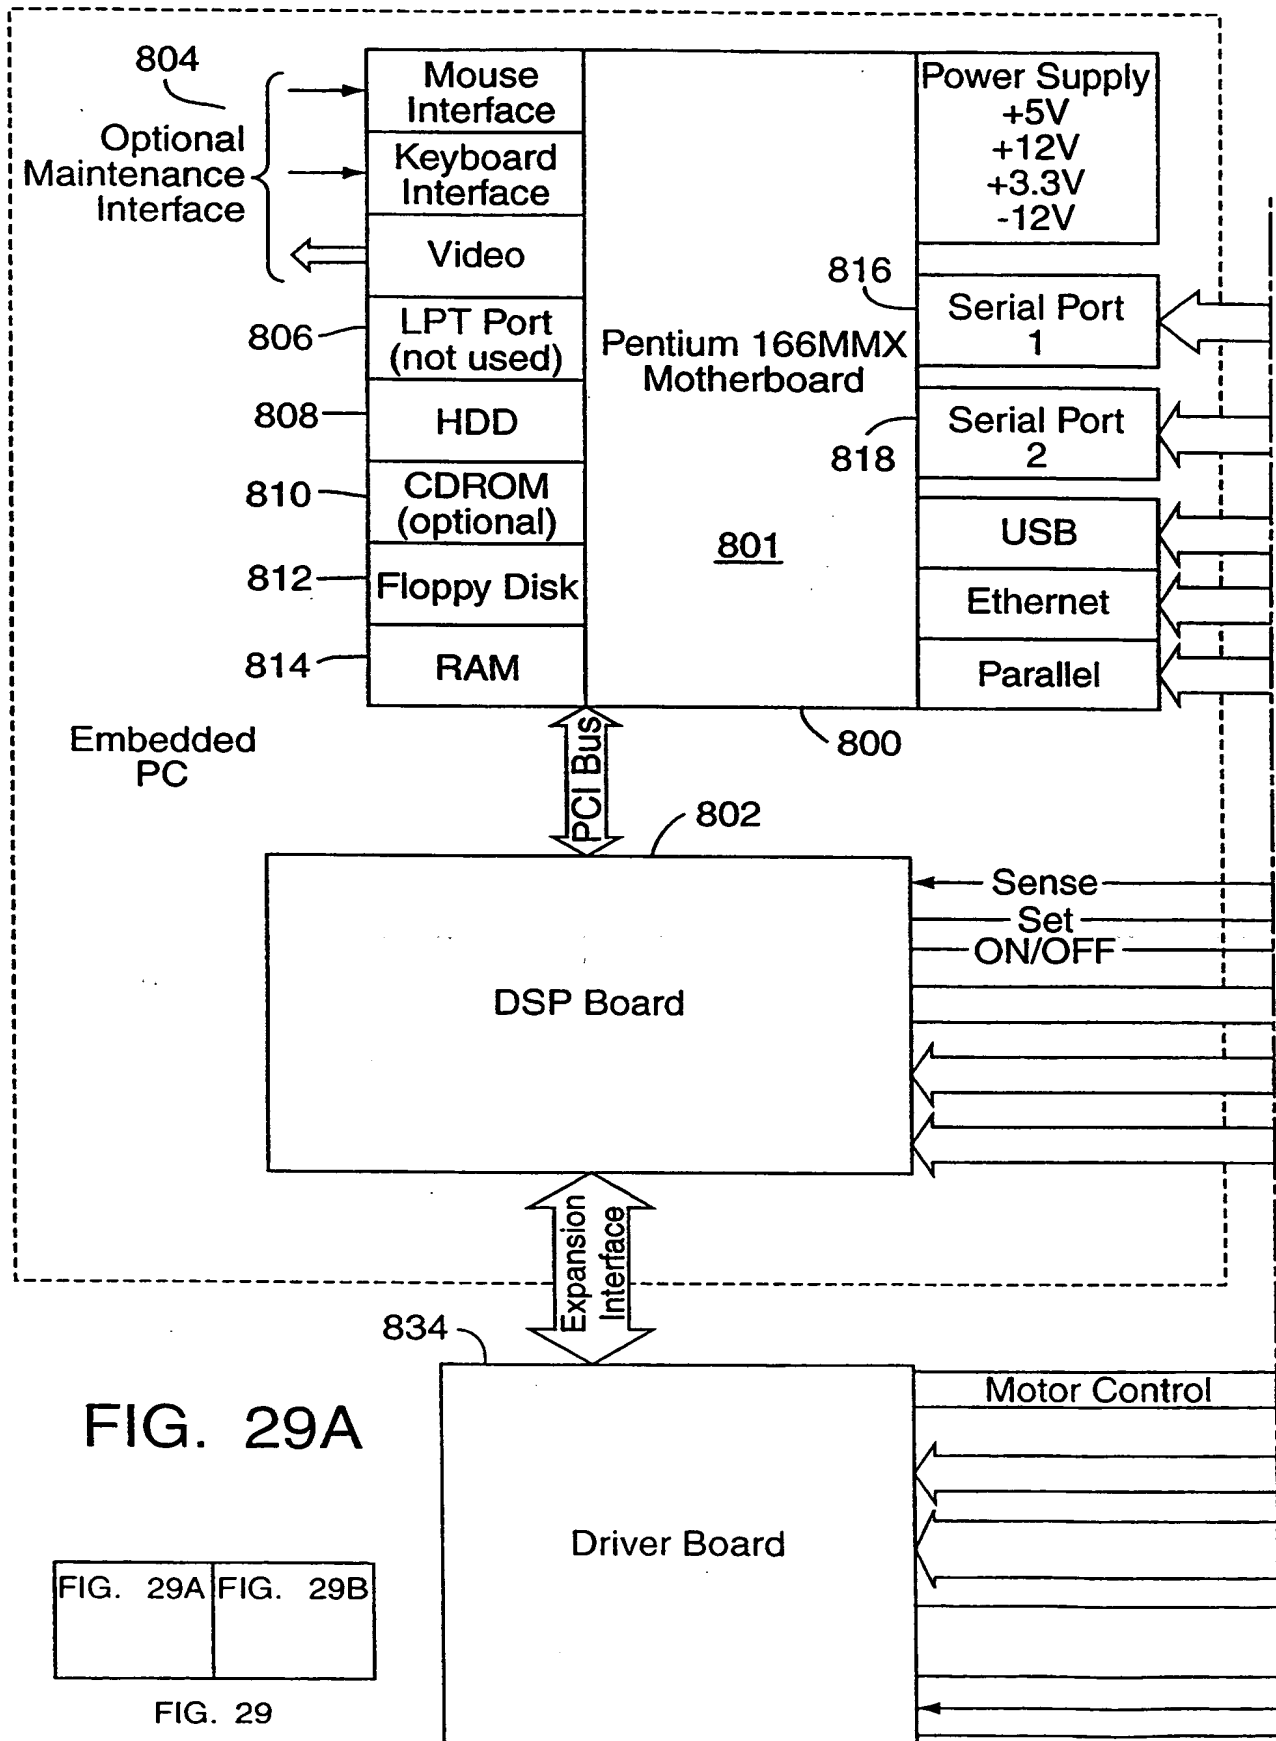

45/45

FIG. 29B

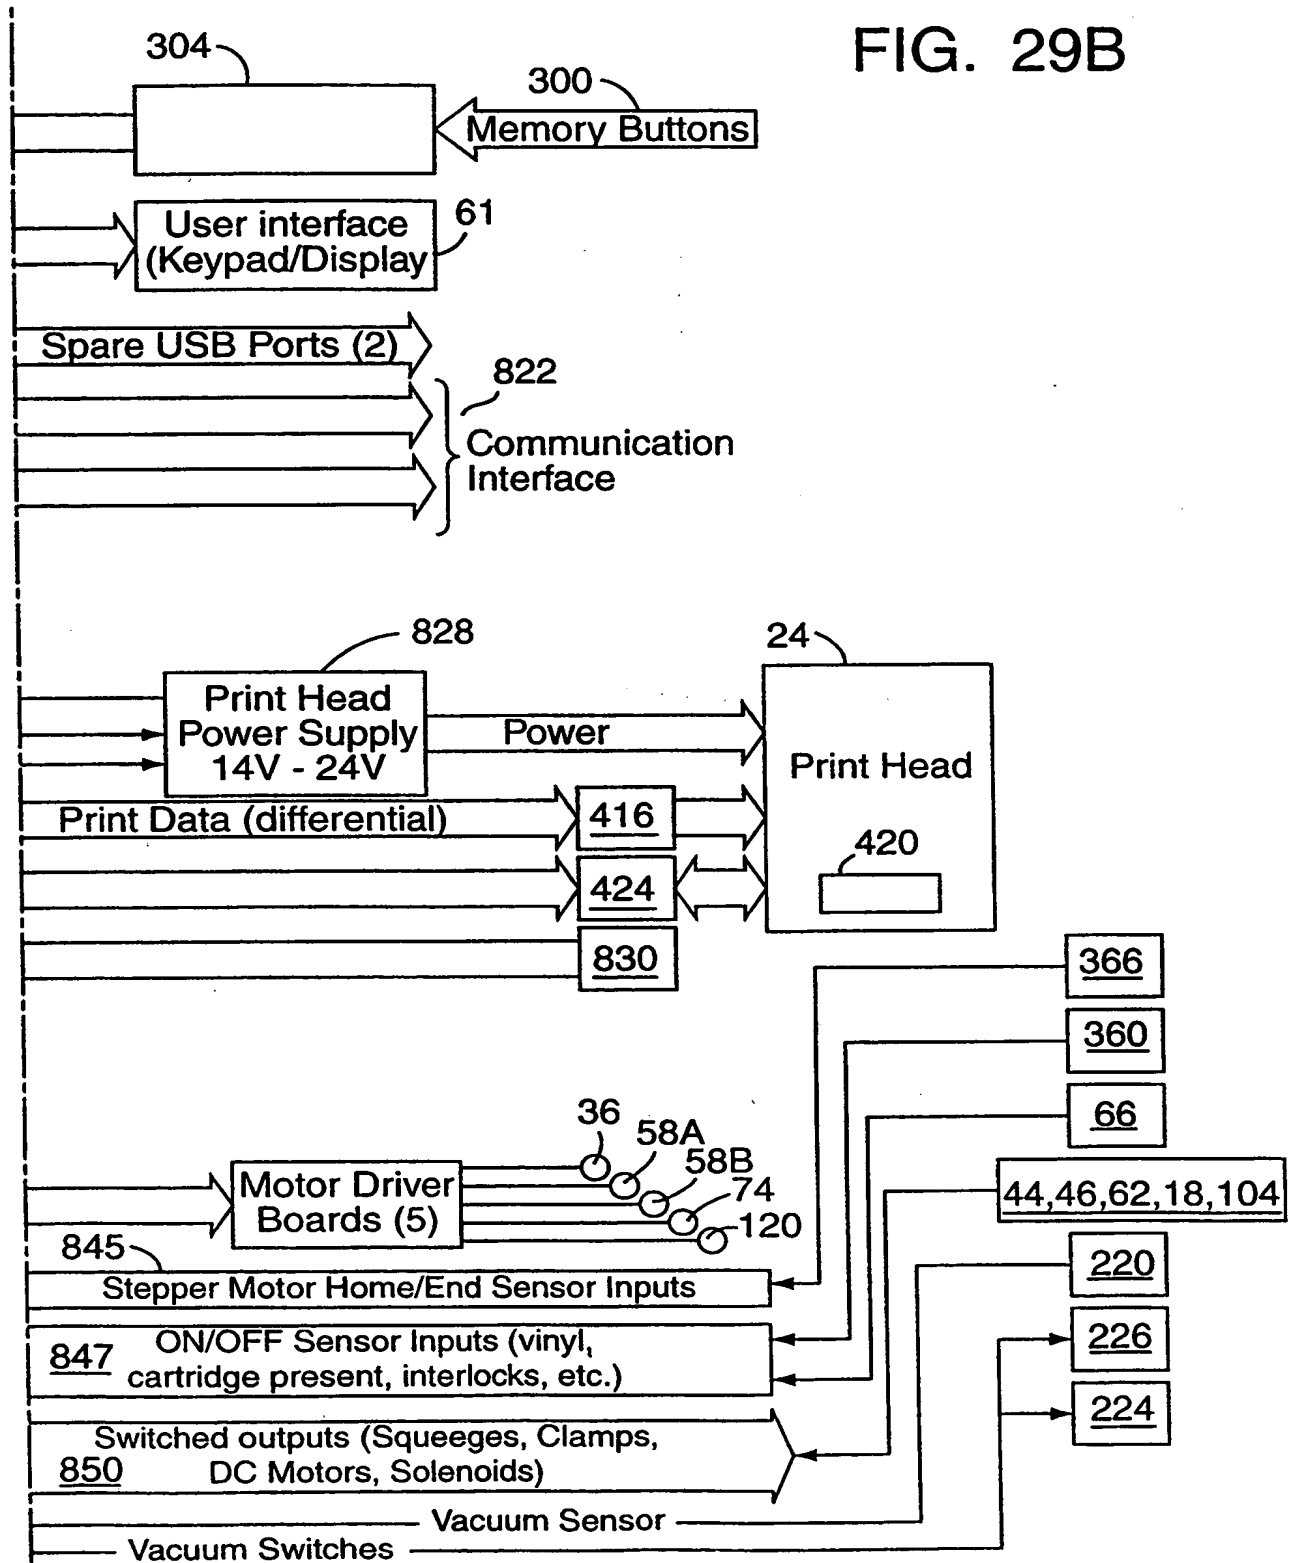

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 October 2000 (12.10.2000)

PCT

(10) International Publication Number
WO 00/59729 A3

(51) International Patent Classification⁷: **B41J 35/36,**
17/32

(21) International Application Number: **PCT/US00/09426**

(22) International Filing Date: **7 April 2000 (07.04.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:

09/288,261	8 April 1999 (08.04.1999)	US
09/288,277	8 April 1999 (08.04.1999)	US
09/288,361	8 April 1999 (08.04.1999)	US
09/288,424	8 April 1999 (08.04.1999)	US
09/288,428	8 April 1999 (08.04.1999)	US
09/288,278	8 April 1999 (08.04.1999)	US


(71) Applicant (for all designated States except US): **GERBER SCIENTIFIC PRODUCTS, INC.** [US/US]; 151 Batson Drive, Manchester, CT 06040 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HEVENOR, Charles, M.** [—/US]; 50 Whittles Way, Glastonbury, CT 06033 (US). **TORTORA, William, J.** [—/US]; 77 Fisher Hill Road, Willington, CT 06279 (US). **LOOS, William, A.** [—/US]; 44 Melrose Road, Broad Brook, CT 06016 (US). **WOOD, Kenneth, O.** [—/US]; 6914 Saint Vrain Road, Longmont, CO 80503 (US). **OSCARSON, Edward, M.** [—/US]; 70 Behrens Road, New Hartford, CT 06057 (US). **MINDEK, David, M.** [—/US]; 6 Lakeside Drive, Ashford, CT 06278 (US). **EHRHARDT, Kurt, J.** [—/US]; 10 High Meadow Lane, Enfield, CT 06082 (US). **WHITE, John, K.** [—/US]; 56 School Brook Lane, Vernon, CT 06066 (US). **MACQUEEN, Raymond, J.** [—/US]; 52 Lynette Court, New Hartford, CT 06057 (US).

[Continued on next page]

(54) Title: **WIDE FORMAT THERMAL PRINTING APPARATUS INCLUDING AN INK DONOR SHEET ASSEMBLY WITH A MEMORY**

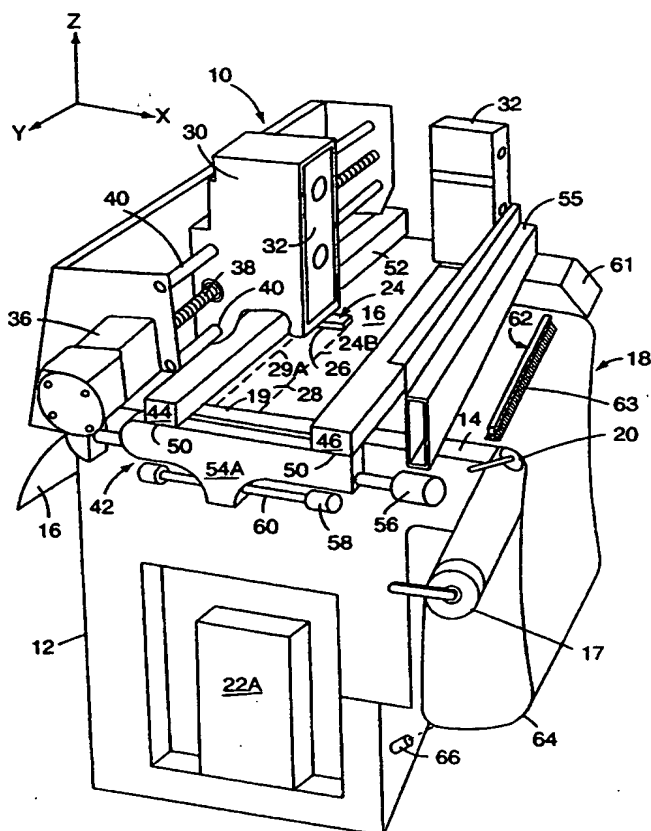

(57) Abstract: Disclosed are the following: a wide format thermal printer for printing a multicolor graphic product on a printing sheet; a vacuum workbed for supporting a sheet material for performing work operations, such as cutting, printing or plotting, thereon; a replaceable donor sheet assembly, which includes a memory (300), for use with a thermal printer; methods and apparatus for improved thermal printing, including methods and apparatus for conserving donor sheet and reducing the amount of time required to print a multicolor graphic product; a thermal printhead including a memory; and methods and apparatus for the alignment of a sheet material for printing or performing other work operations on the sheet material. The wide format thermal printer can include provision for the automatic loading of cassettes of donor sheet from a cassette storage rack. The vacuum workbed can include provision for determining the size of the sheet material supported by the workbed, and for controlling the suction applied to the apertures in a worksurface of the workbed. Also disclosed are methods and apparatus for controlling the tension of the donor sheet during printing with a wide format thermal printer.

WO 00/59729 A3



LIS, Brian, H. [—/US]; 19 Lewis Lane, West Hartford, CT 06110 (US). DOWNEY, R y, Douglas [—/US]; 176 Thayer Road, Higganum, CT 06441 (US). BANAVIGE, Michael, J. [—/US]; 948 North River Road, Coventry, CT 06238 (US). BINNALL, Daniel, G. [—/US]; 14 Meadow Crossing, Simsbury, CT 06070 (US). KAPUSHINSKI, Ronald, A. [—/US]; 54 Russwin Road, New Britain, CT 06053 (US). PLUDE, Howard, H. [—/US]; 51 Old Wheeler Court, Avon, CT 06001 (US).

(74) Agents: RAINVILLE, Peter, J. et al.; McCormick, Paulding & Huber, Cityplace II, 185 Asylum St., Hartford, CT 06103 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,

RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

(88) Date of publication of the international search report:

31 May 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Intel nal Application No

PCT/US 00/09426

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B41J35/36 B41J17/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 654 760 A (EASTMAN KODAK CO) 24 May 1995 (1995-05-24) column 6, line 33 - line 41 column 8, line 22 - column 9, line 2 figures 4,7-9 ---	1-27
X	EP 0 887 197 A (SONY CORP) 30 December 1998 (1998-12-30) column 14, line 50 - line 58; figure 7A ---	1-27
X	US 5 774 639 A (SCHILDKRAUT JAY S ET AL) 30 June 1998 (1998-06-30) column 3, line 7 - line 11 column 4, line 47 - line 50 column 8, line 30; claim 36 --- -/-	1-27

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

10 July 2000

Date of mailing of the international search report

16. 10. 00

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Bridge, S

INTERNATIONAL SEARCH REPORT

Inter
nas Application No
PCT/US 00/09426

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 803 627 A (PARANJPE SURESH C) 8 September 1998 (1998-09-08) column 24, line 40 - line 53 column 7, line 50 - line 53 ---	1-27
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 129 (M-1228), 2 April 1992 (1992-04-02) & JP 03 292177 A (MINOLTA CAMERA CO LTD), 24 December 1991 (1991-12-24) abstract -----	1-27

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/09426

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-27

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA 210

1. Claims: 1-27

PROBLEM : an alternative assembly providing a supply of donor sheet; SOLUTION : an assembly comprising a core having a tubular body having a plurality of drive elements, a donor sheet wound about said core body, and a memory element having a data transfer face.

2. Claims: 28-37

PROBLEM : clamping the printing sheet; SOLUTION : a thermal printer comprising a pair of clamps for translating the printing sheet and means for securing the printing sheet to the workbed when printing on the printing sheet and releasing the printing sheet from the workbed when translating the printing sheet.

3. Claims: 38-44

PROBLEM : pivoting the printhead; SOLUTION : a thermal printer, comprising a printhead carriage including a base structure, a pivoting cantilever arm mounting a thermal printhead, a pivot actuator for lowering and raising the thermal printhead, donor sheet handling means.

4. Claims: 45-50

PROBLEM : printing of colour planes; SOLUTION : a thermal printer comprising a controller for translating the printing sheet in one direction when printing one of the colour planes and translating the printing sheet in the opposite direction when printing a different colour plane.

5. Claims: 51-56

PROBLEM : conserving donor sheet; SOLUTION : a method of thermally printing a colour plane comprising the step of refraining from pressing the donor sheet against the printing sheet with the printhead when translating the printhead at least part of the distance between the consecutive pixels, whereby the refraining from pressing substantially prevents donor sheet from being drawn past the printhead, thereby conserving donor sheet.

6. Claims: 57-60

PROBLEM : translating the printing sheet; SOLUTION : a method of printing wherein at least one of the steps of translating the printhead includes translating the printing sheet in at least two steps, wherein one of the steps

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

translates the printing sheet by a distance less than the increment and the other and any additional steps each translate the printing sheet by the increment.

7. Claims: 61-63

PROBLEM : printing a colour plane; SOLUTION : a method of printing comprising the steps of organizing a selected colour plane into selected areas of the colour plane, wherein within each area the objects to be printed are within a selected distance of each other along a printing sheet translation axis and wherein the objects within any one area are separated in the direction of the printing sheet translation axis from the objects in the other areas by a distance greater than the selected distance; printing each of the areas; before printing the next area translating the printing sheet by the distance substantially equal to the distance separating the area just printed and the next area to be printed.

8. Claims: 64-65

PROBLEM : printing several colour planes; SOLUTION : a method of printing wherein when printing at least one of the colour planes the printing sheet is translated between successive swaths in the opposite direction to that in which it is translated when printing successive swath of a different colour plane; and wherein printing for at least one of the colour planes includes translating the printing sheet in at least two steps wherein one of the steps translates the printing sheet a distance less than the selected width and any additional steps are each substantially equal to the selected width.

9. Claims: 66-69

PROBLEM : take printhead position into account while printing; SOLUTION : a method of thermally printing a colour plane comprising the steps of determining the end in the direction of the printing sheet translation axis of the colour plane to which the printhead is currently the nearest; and selecting the first portion of the colour plane to be between the printhead and the nearer end of the colour plane and the second portion to be the remainder of the colour plane; and printing the first portion of the colour plane onto the printing sheet before printing the second portion of the colour plane.

10. Claims: 70-74

PROBLEM : printing a colour plane; SOLUTION : a method of

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

thermally printing a colour plane wherein when printing a first portion of the colour plane the printing sheet is translated in one direction between print swaths and when printing a second portion the printing sheet is translated in the opposite direction between print swaths.

11. Claims: 75-76

PROBLEM : selection of next colour plane during printing;
SOLUTION : a method of printing with a thermal printer comprising the steps of performing printing the colour plane for each of the colour planes wherein after finishing printing a colour plane and prior to printing the next colour plane, performing the step of determining whether one of the end of the colour plane to be printed next is nearer the current position of the printhead than the other end of the colour plane to be printed; and when one end is nearer, printing at least part of that portion of the colour plane between the printhead and the nearer end of the colour plane before printing a least part of portion of the colour plane between the printhead and the other end of the colour plane.

12. Claims: 77-80

PROBLEM : printing of overlapping colours; SOLUTION : a method of thermally printing a colour plane comprising the steps of determining that the colour plane to be printed includes an object to be knocked out by one of another spot colour object and a process colour object in the finished graphic product to be printed on the printing sheet; printing the colour plane and refraining from printing those areas of the colour plane determined to be knocked out.

13. Claim : 81

PROBLEM : data processing with a computer; SOLUTION : a method for processing data with a computer comprising the steps of providing a machine readable data file, selecting a colour plane to be printed, examining the data file to select objects that are of the colour of the selected colour plane, associating a rectangular area of the colour plane with each object, combining those areas that are within a selected distance of each other along printing sheet translation axis, increasing the dimension, of each of the areas, that extends in the direction of the print axis such that the width is an integral number of printing widths, selecting each of the areas for printing, and when selecting each of the areas, performing the steps of dividing the selected area into an integral number of print swaths; selecting each of the print swaths in turn and storing machine readable data corresponding to the objects to be printed in the selected print swath for instructing the

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

printer for printing the print swath.

14. Claims: 82-86

PROBLEM : further conserving donor sheet; SOLUTION : a thermal printer comprising a controller including programming stored in a memory associated therewith for when printing at least one print swath, determining when consecutive pixels to be printed are separated by more than a minimum distance in the direction of the print axis, and upon determining that the consecutive pixel are so separated, lifting the thermal printhead away from the printing sheet when translating the printhead at least part of the distance between the consecutive pixels for substantially preventing donor sheet from being drawn past the printhead, thereby conserving donor sheet.

15. Claims: 87-88

- PROBLEM : programmed controller; SOLUTION : a wide format thermal printer wherein a controller includes programming stored in a memory associated therewith for
- A) printing the colour plane on the printing sheet in print swaths extending along a print axis substantially orthogonal to the printing sheet translation axis by repeating the following items 1) and 2) alternately
- 1) translating the printhead in the direction of the print axis and selectively energizing the thermal printing elements while pressing the selected donor sheet against the printing sheet with the thermal printhead so as to draw the donor sheet past the printhead and print on the printing sheet in print swaths extending in the direction of the print axis and having a swath width in the direction of the printing sheet translation axis;
- 2) translating the printing sheet in the direction of the printing sheet translation axis in an integer number of separate steps, each step translating the printing sheet by a translation increment substantially equal to the printing width;
- and
- B) wherein 1) includes translating the printing sheet in at least two steps, wherein one of the steps translates the printing sheet by a distance less than the translation increment and the other and any additional steps each translate the printing sheet by the translation increment.

16. Claims: 89-90

PROBLEM : how far to advance the printhead; SOLUTION : a wide format thermal printer wherein translating the printing sheet in the direction of the printing sheet translation axis by the distance substantially equal to the distance

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

separating the area just printed and the next area to be printed.

17. Claims: 91-94

PROBLEM : printing sequence; SOLUTION : a thermal printer wherein said controller includes programming stored in a memory associated therewith for determining the end of the colour plane to which the printhead is currently the nearest; selecting the first portion of the colour plane to be between the printhead and the nearer end of the colour plane and the second portion to be the remainder of the colour plane; printing the first portion of the colour plane onto the printing sheet before printing the second portion of the colour plane.

18. Claims: 95-98

PROBLEM : deciding what to print; SOLUTION : a thermal printer wherein a controller includes programming stored in a memory associated therewith for :
determining from the machine readable data that a first colour plane to be printed before a second colour plane includes at least one object including a portion to be knocked out by an object of the colour of the second colour plane;
printing the first a colour plane onto the printing sheet and
refraining from printing that portion of the object determined to be knocked out.

19. Claims: 99-113

PROBLEM : aligning a sheet material; SOLUTION : a method of aligning a sheet material disposed upon a worksurface comprising the steps of placing the sheet material over the worksurface; determining the alignment of the sheet material in a coordinate system having first and second axes for specifying locations relative to the worksurface and the sheet material overlaying the worksurface; and differentially driving spaced portions of the sheet material for moving the sheet material for providing a selected alignment of the sheet material.

20. Claims: 114-117

PROBLEM : supporting a sheet material for performing work operations and printing; SOLUTION : an apparatus for supporting a sheet material on a worksurface with a selected alignment and for performing work operations on the sheet material responsive to a controller, comprising: a workbed

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

providing the worksurface for supporting the sheet material, the worksurface containing a workhead axis and a sheet material translation axis perpendicular to the workhead axis; a workhead for performing the work operation upon the sheet material, said workhead being translatable parallel to the work axis for printing on the sheet material; means for securing the sheet material to the worksurface when working of the sheet material and for releasing the sheet material from the worksurface when translating the sheet material; sensing means for sensing an edge of the sheet material; and sheet material translation means for translating the sheet material in the direction of the sheet material translation axis, said sheet material translation means including means for differentially driving space portions of the sheet material, responsive to said sensing means, for providing a selected alignment of the sheet material relative to the worksurface.

21. Claims: 118-122

PROBLEM : determine skew; SOLUTION : an apparatus for supporting a sheet material on a worksurface with a selected alignment for performing work operations on the sheet material, comprising: a workbed for providing the worksurface for supporting the sheet material, said worksurface containing a work axis and sheet material translation axis perpendicular to the work axis; sheet material translation means for translating the sheet material in the direction of the sheet material translation axis; a workhead for performing the work operations upon the sheet material, the workhead being translatable parallel to the work axis; means for securing the sheet material to the worksurface when printing on the sheet material and releasing the sheet material from the worksurface when translating the sheet material; an edge sensor for sensing an edge of the sheet material, said sensor mounted with the workhead for translation therewith in the direction of the work axis; a controller in communication with said workhead, said sheet material translation means and said edge sensor for controlling the work operation on the sheet material responsive to data stored in a memory, and wherein said controller includes programming, stored in a memory associated therewith, for determining the alignment of the sheet material, said programming including instructions for the following: translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a first communication from the edge sensor responsive to the location of the edge of the sheet material in the direction of the work axis; energizing the sheet material translation means for translating the sheet material a known distance in the direction of the sheet material translation axis; translating the workhead in the direction of the work axis and past the edge of the sheet; receiving a second communication from the edge sensor responsive to the

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

location of the edge of the sheet material in the direction of the work axis; and determining the skew of the sheet material responsive to said first and second communications and said known translation distance.

22. Claim : 123

PROBLEM : an edge detection system; SOLUTION : an edge detection system for providing signals to a controller for detecting the edge of a sheet material in a printer that includes a worksurface for supporting the sheet material, drive means for translating the sheet material along a sheet material translation axis and a workhead translatable along a work axis perpendicular to the sheet material translation axis, the edge detection system comprising:

- a first sensor mounted for translation in the direction of the work axis along with the workhead and facing the worksurface for detecting light travelling in a direction upward from the worksurface toward the sensor, and
- a second sensor for providing signals responsive to the position of the first sensor in the direction of the work axis.

23. Claims: 124-143

PROBLEM : a replaceable thermal printhead assembly; SOLUTION : a replaceable thermal printhead assembly for use in a thermal printer to press a donor sheet against a printing sheet and, responsive to communication from a controller associated with the printer, print graphic products on the printing sheet material, comprising:

- an array of thermal printing elements;
- drive electronics for selectively energizing said thermal Printing elements responsive to communications received from the controller associated with the printer; and
- a semiconductor element mounted with said drive electronics and said array of thermal printing elements, said semiconductor element including a memory storing data characteristic of the printhead assembly.

24. Claims: 144-146

PROBLEM : operating a thermal printer with a printhead; SOLUTION : a method of operating a thermal printer that presses a donor sheet material against a printing sheet with a thermal printhead assembly and, responsive to a controller selectively energizes thermal printing elements of the thermal printhead assembly and translates the printing sheet for printing graphic products on a selected area of the printing sheet, comprising the steps f:

- providing a thermal printhead assembly having the following: thermal printing elements, drive electronics for

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

selectively energizing the thermal printing elements; and a semiconductor element including a memory storing data characteristic of the thermal printhead;
reading the data characteristic of the printhead from the memory, and energizing the thermal printing elements with the drive electronics responsive to the data read from the memory for printing the graphic products on the printing sheet.

25. Claims: 147-156

PROBLEM : remembering printing parameters; SOLUTION : a method of operating a thermal printer that presses a donor sheet against a printing sheet with a thermal printhead and, responsive to a controller, selectively energizes thermal printing elements of the thermal printhead and translates the printing sheet for printing a graphic product on the printing sheet, comprising the steps of : providing a thermal printhead assembly having the following: the thermal printing elements, drive electronics for selectively energizing the thermal printing elements; and a semiconductor element including a memory for storing data; printing the graphic products on the printing sheet with the thermal printhead assembly, monitoring a printing parameter; and storing data representative of the monitored printing parameter in the memory.

26. Claims: 157-158

PROBLEM : thermal printhead quality control; SOLUTION : a method of operating a thermal printer comprising the steps of:
providing a thermal printhead;
energizing the thermal printing elements for printing;
removing the thermal printhead assembly from the printer;
measuring data characteristic of the thermal printhead assembly;
reading the data characteristic of the thermal printhead assembly from the memory; and
comparing the measured data characteristic of the thermal printhead assembly to the data characteristic of the thermal printhead assembly read from the memory.

27. Claims: 159-184

PROBLEM : applying a tension to the donor sheet; SOLUTION : a method of tensioning donor sheet in a thermal printer comprising the steps of
providing a take-up motor coupled to the take-up roll;
providing a brake coupled to the donor sheet;
reading data characteristic of the donor sheet from a memory element mounted with one of the supply roll and the

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

take-up roll;
determining a desired tension to be applied to the donor sheet;
determining the radius of at least the take-up roll as a function of at least the data characteristic of the donor sheet read from the memory element; and
applying the desired tension to the donor sheet, including the step of selectively energizing the take-up motor as a function of the radius of the take-up roll and the desired tension to be applied to the donor sheet.

28. Claims: 185-198

PROBLEM : Vacuum workbed; SOLUTION : Vacuum workbed for supporting a sheet material to be worked upon, comprising:
a workbed including a plurality of apertures for applying suction to the sheet material, said apertures separated into first and second zones for accommodating sheet material of different sizes and orientations;
a suction source for applying suction to the apertures;
a manifold for providing fluid communication between said suction source and said apertures for applying the suction thereto;
a sensor in fluid communication with said suction source for providing a signal responsive to the degree of vacuum drawn by said suction source on the apertures; and
wherein the flow rate through one of the zones of apertures is restricted for producing a greater than nominal degree of vacuum when said one zone includes unblocked apertures.

29. Claims: 199-210

PROBLEM : positioning of multiple flow valves; SOLUTION : Vacuum workbed comprising a worksurface including a plurality of apertures separated into a plurality of zones; a suction source for applying suction to the apertures; a first manifold for providing fluid communication between said suction source and a first group of zones; a second manifold for providing fluid communication between said suction source and a second group of zones, said first and second groups including at least one zone each; a sensor in fluid communication with said suction source for providing a signal responsive to the degree of vacuum drawn by said suction source on the apertures; a first flow control valve fluidly interposed between said first group and said suction source; a second flow control valve fluidly interposed between said second group and said suction source; and wherein said first flow control valve is fluidly interposed between said second flow control valve and said suction source.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

30. Claims: 211-215

PROBLEM : automatically determining the size or orientation of a sheet; SOLUTION : a method of automatically determining the size or orientation of a sheet material supported by a workbed having suction apertures therein, comprising the steps of:

grouping the apertures into N groups of apertures;
applying suction to one of the groups of apertures;
incrementing the number of groups to which suction is applied by applying suction to an additional group and sensing the difference in the degree of vacuum attained between the application of suction prior to and subsequent to incrementing the number of groups;
determining from the difference whether the additional group includes unblocked apertures; and
when determining in the prior step that the additional group does not include unblocked apertures, repeating steps (c) and (d) until one of: a determination is made in step (d) that the additional group does include unblocked apertures; and no groups remain.

31. Claims: 216-226

PROBLEM : support sheet materials of varying sizes; SOLUTION : a method of supporting sheet materials of varying sizes for performing work operations thereon, comprising the steps of: providing a workbed having a worksurface for supporting the sheet material, the worksurface including first and second groups of apertures;

applying suction to the apertures;
sensing a selected number of times the degree(s) of vacuum attained during the step of applying suction and providing a selected number of signals responsive to the degree(s) of vacuum; and
determining from the selected number of signals one of the following: that all apertures are blocked; that a first group of apertures is blocked and a second group of apertures includes unblocked apertures; and that both first and second groups of apertures include unblocked apertures.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter national Application No

PCT/US 00/09426

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0654760 A	24-05-1995	US 5455617 A	03-10-1995
		DE 69424020 D	25-05-2000
		JP 7214855 A	15-08-1995
EP 0887197 A	30-12-1998	JP 11010929 A	19-01-1999
		US 6059469 A	09-05-2000
US 5774639 A	30-06-1998	DE 19604867 A	22-08-1996
		GB 2298051 A,B	21-08-1996
		GB 2328405 A,B	24-02-1999
		JP 8238827 A	17-09-1996
US 5803627 A	08-09-1998	US 5445463 A	29-08-1995
		JP 7001783 A	06-01-1995
		US 5651620 A	29-07-1997
		US 5567066 A	22-10-1996
		US 5611629 A	18-03-1997
		US 5691961 A	25-11-1997
JP 03292177 A	24-12-1991	NONE	